

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P224308

Luminaire Tested: **LD2B10D010 EU2B10FL409035 2LBDSQLC\*MW**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P224308  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14835)  
Test Lab: INNOVATION CENTER (G1)  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LD2B10D010 EU2B10FL409035 2LBDSQLC\*MW  
Description: 1000 Lumen, 2inch Portfolio LED Downlight  
FLOOD OPTIC  
LENSED SQUARE CAST TRIM WITH MATTE WHITE FINISH  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 757.8 lumens  
Efficiency: N/A  
Efficacy: 73.6 lumens/watt  
Spacing Criteria (0/90/45): 0.61 / 0.61 / 0.59  
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')  
CIE Type: Direct


Input Watts (W): 10.3  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P224308

CATALOG NUMBER: LD2B10D010 EU2B10FL409035 2LBDSQLC\*MW

### Luminous Intensity Polar Plot

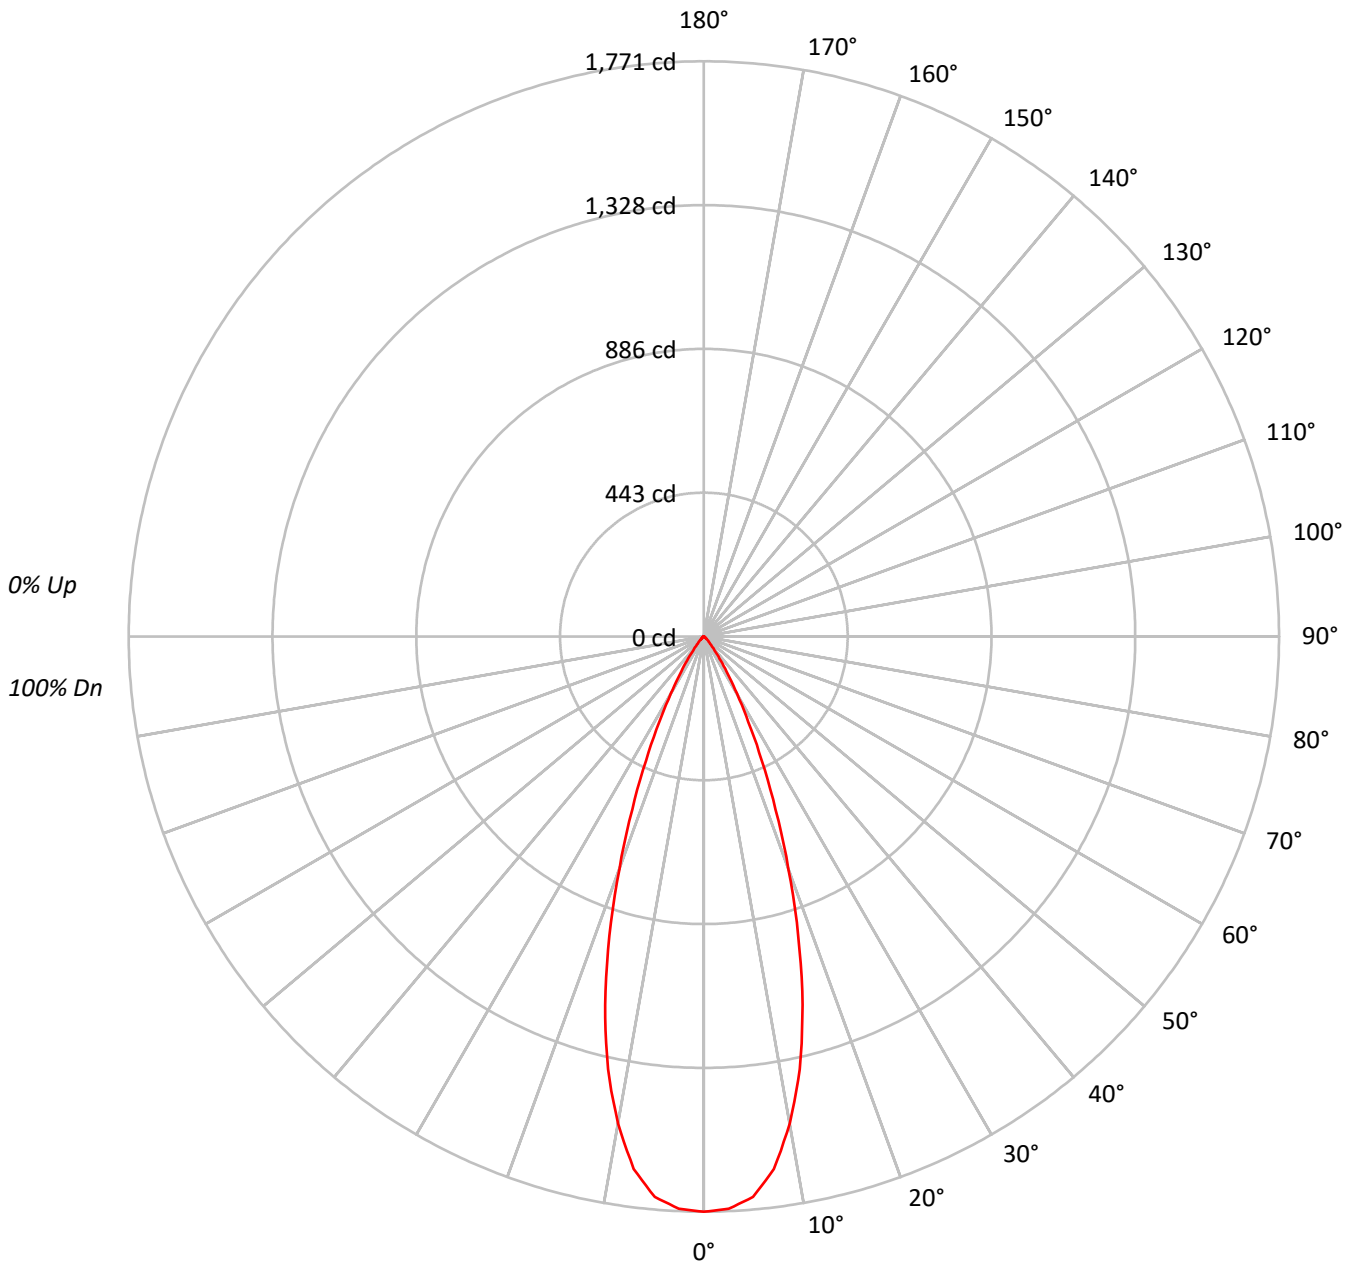



TEST NUMBER: P224308

CATALOG NUMBER: LD2B10D010 EU2B10FL409035 2LBDSQLC\*MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95	95	95	95
2	110	106	102	99	108	104	101	98	101	98	96	98	96	94	95	94	92	91	91	91	91
3	105	100	96	93	104	99	95	92	96	93	90	94	91	89	92	90	88	86	86	86	86
4	101	95	90	87	100	94	90	86	92	88	85	90	87	85	88	86	84	82	82	82	82
5	98	91	86	82	96	90	85	82	88	84	81	86	83	80	85	82	80	79	79	79	79
6	94	86	82	78	93	86	81	78	84	80	77	83	79	77	82	79	76	75	75	75	75
7	90	83	78	74	89	82	77	74	81	77	74	80	76	73	79	76	73	72	72	72	72
8	87	79	74	71	86	79	74	71	78	74	71	77	73	70	76	73	70	69	69	69	69
9	84	76	71	68	83	76	71	68	75	71	68	74	70	67	73	70	67	66	66	66	66
10	81	73	68	65	80	73	68	65	72	68	65	71	68	65	71	67	65	64	64	64	64

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	686028
5°	673563
10°	598753
15°	470906
20°	313358
25°	179888
30°	90885
35°	42747
40°	17192
45°	8546
50°	4700
55°	3309
60°	3021
65°	1741
70°	2152
75°	1497
80°	2231
85°	0



TEST NUMBER: P224308

CATALOG NUMBER: LD2B10D010 EU2B10FL409035 2LBDSQLC\*MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	158.6	20.9
10°-20°	318.1	42.0
20°-30°	197.9	26.1
30°-40°	60.8	8.0
40°-50°	13.4	1.8
50°-60°	4.8	0.6
60°-70°	2.4	0.3
70°-80°	1.4	0.2
80°-90°	0.4	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	674.6	89.0
0°-40°	735.5	97.1
0°-60°	753.6	99.4
0°-90°	757.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	757.8	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1771	
5°	1732	159
15°	1174	318
25°	421	198
35°	90	61
45°	16	13
55°	5	5
65°	2	2
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P224308

CATALOG NUMBER: LD2B10D010 EU2B10FL409035 2LBDSQLC\*MW

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1771.1
2.5°	1763.4
5°	1732.3
7.5°	1653.5
10°	1522.3
12.5°	1364.8
15°	1174.3
17.5°	966.3
20°	760.2
22.5°	576.4
25°	420.9
27.5°	296.5
30°	203.2
32.5°	137.1
35°	90.4
37.5°	54.4
40°	34.0
42.5°	23.3
45°	15.6
47.5°	10.7
50°	7.8
52.5°	6.8
55°	4.9
57.5°	3.9
60°	3.9
62.5°	2.9
65°	1.9
67.5°	1.9
70°	1.9
72.5°	1.9
75°	1.0
77.5°	1.0
80°	1.0
82.5°	1.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)