

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P264084

Luminaire Tested: **LD2B10D010 EU2B1010SP158040 2LBD*GPH**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P264084
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-1805-787-1)
Test Lab: INNOVATION CENTER(G2)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD2B10D010 EU2B1010SP158040 2LBD*GPH
Description: 1000 Lumen, 2inch Portfolio LED Downlight
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 968.0 lumens
Efficiency: N/A
Efficacy: 94.0 lumens/watt
Spacing Criteria (0/90/45): 0.28 / 0.28 / 0.28
Luminous Opening: Circular (Dia: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 10.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P264084

CATALOG NUMBER: LD2B10D010 EU2B1010SP158040 2LBD*GPH

Luminous Intensity Polar Plot

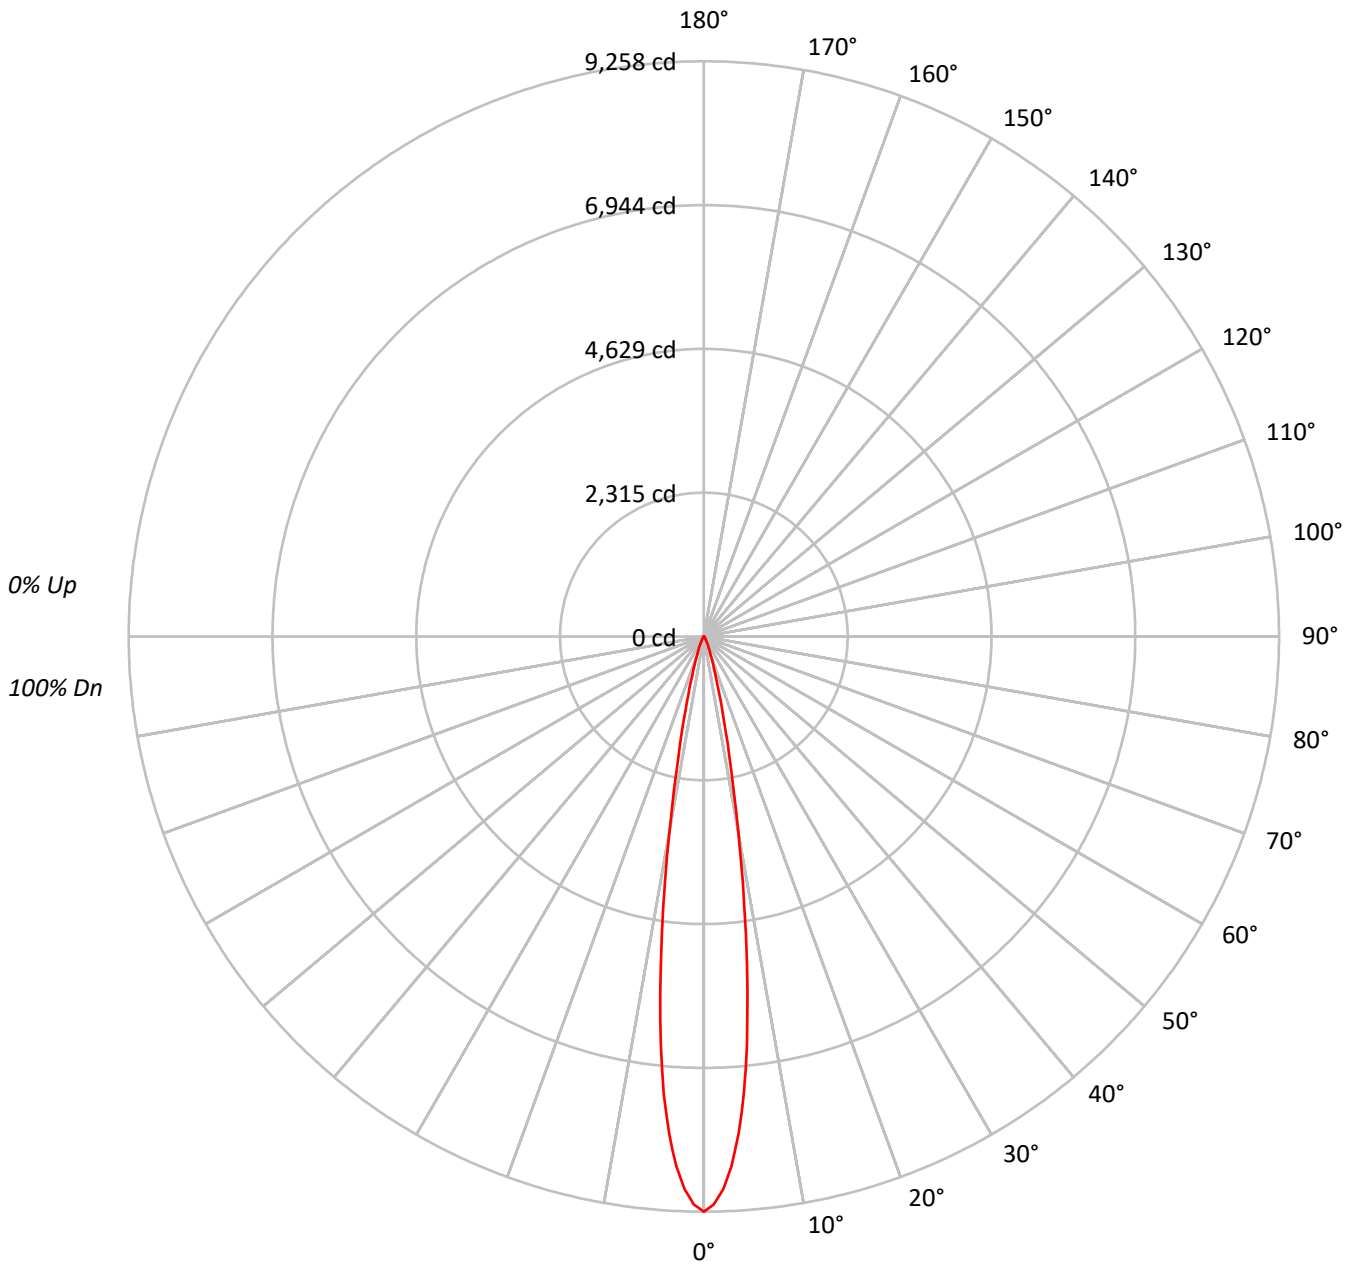



TEST NUMBER: P264084

CATALOG NUMBER: LD2B10D010 EU2B1010SP158040 2LBD*GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100						100													
1	116	114	112	111	113	112	110	109	108	107	106	104	103	102	101	100	100	98	98	97	96						98										
2	113	109	107	105	111	108	106	104	105	103	101	102	101	99	99	98	97	96	95	94						96											
3	110	106	103	100	108	105	102	100	102	100	98	100	98	97	98	96	95	94	93	92						94											
4	107	103	99	97	106	102	99	96	100	97	95	98	96	94	96	95	93	92	91	90						92											
5	105	100	97	94	104	99	96	94	98	95	93	96	94	92	95	93	91	90	89	88						90											
6	103	98	94	92	102	97	94	91	96	93	91	95	92	90	93	91	90	89	88	87						89											
7	101	95	92	90	100	95	92	89	94	91	89	93	90	89	92	90	88	87	86	85						87											
8	99	93	90	88	98	93	90	88	92	89	87	91	89	87	91	88	87	86	85	84						86											
9	97	92	88	86	96	91	88	86	91	88	86	90	87	86	89	87	85	84	83	82						85											
10	95	90	87	85	95	90	87	85	89	86	85	89	86	84	88	86	84	83	82	81						84											

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	4567593
5°	3661158
10°	1597953
15°	495187
20°	172628
25°	76265
30°	34523
35°	17948
40°	10240
45°	4884
50°	3070
55°	1720
60°	987
65°	1167
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P264084

CATALOG NUMBER: LD2B10D010 EU2B1010SP158040 2LBD*GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	561.4	58.0
10°-20°	307.4	31.8
20°-30°	70.1	7.2
30°-40°	20.2	2.1
40°-50°	6.2	0.6
50°-60°	1.9	0.2
60°-70°	0.9	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	938.9	97.0
0°-40°	959.1	99.1
0°-60°	967.2	99.9
0°-90°	968.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	968.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	9258	
5°	7393	561
15°	970	307
25°	140	70
35°	30	20
45°	7	6
55°	2	2
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P264084

CATALOG NUMBER: LD2B10D010 EU2B1010SP158040 2LBD*GPH

CANDELA DISTRIBUTION (FULL):

	0°
0°	9258.1
1°	9142.9
2°	8903.5
3°	8532.0
4°	8021.4
5°	7392.6
6°	6621.8
7°	5760.5
8°	4861.5
9°	3991.3
10°	3189.7
11°	2511.2
12°	1976.8
13°	1555.6
14°	1228.8
15°	969.5
16°	764.9
17°	608.9
18°	489.7
19°	398.3
20°	328.8
22.5°	212.6
25°	140.1
26°	118.2
27°	100.3
28°	84.4
29°	70.5
30°	60.6
32.5°	41.7
35°	29.8
37.5°	21.9
40°	15.9
42.5°	10.9
45°	7.0
47.5°	5.0
50°	4.0
52.5°	3.0
55°	2.0
57.5°	1.0
60°	1.0
62.5°	1.0
65°	1.0
67.5°	1.0



TEST NUMBER: P264084

CATALOG NUMBER: LD2B10D010 EU2B1010SP158040 2LBD*GPH

CANDELA DISTRIBUTION (continued):

	0°
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







70°		0.0
72.5°		0.0



(END OF REPORT)