

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P264769

Luminaire Tested: **LD2B10D010 EU2B1010SP158040 2LBSQLC*MMS**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P264769
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1711-432-2)
Test Lab: INNOVATION CENTER(G3)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD2B10D010 EU2B1010SP158040 2LBSQLC*MMS
Description: 1000 Lumen, 2inch Portfolio LED Downlight
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 912.0 lumens
Efficiency: N/A
Efficacy: 88.5 lumens/watt
Spacing Criteria (0/90/45): 0.31 / 0.31 / 0.32
Luminous Opening: Circular (Dia: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 10.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P264769

CATALOG NUMBER: LD2B10D010 EU2B1010SP158040 2LBSQLC*MMS

Luminous Intensity Polar Plot

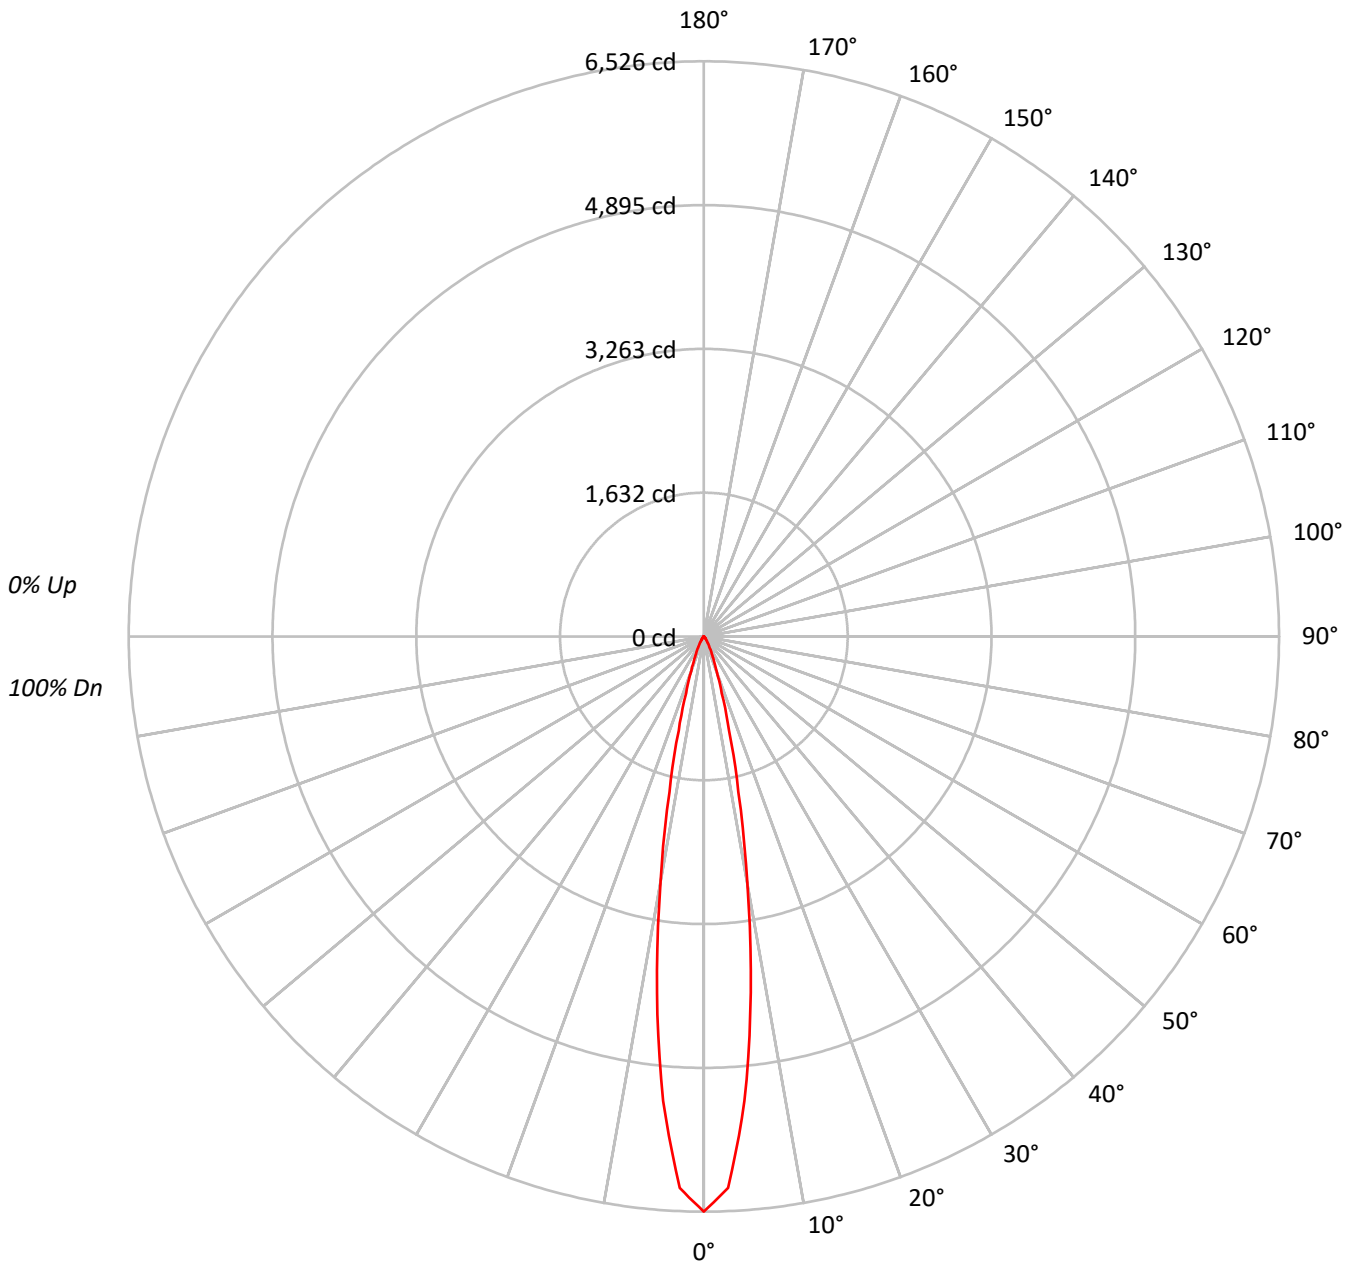



TEST NUMBER: P264769

CATALOG NUMBER: LD2B10D010 EU2B1010SP158040 2LBSQLC*MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	115	113	111	110	113	111	110	108	107	106	105	104	103	102	100	99	99	97	97	97	97
2	112	108	106	103	110	107	104	102	104	102	100	101	99	98	98	97	96	94	94	94	94
3	109	104	101	98	107	103	100	97	100	98	96	98	96	94	96	94	93	92	92	92	92
4	105	100	97	94	104	99	96	93	97	95	92	96	93	91	94	92	90	89	89	89	89
5	103	97	93	91	101	96	93	90	95	92	89	93	91	89	92	90	88	87	87	87	87
6	100	94	90	88	99	94	90	87	92	89	87	91	88	86	90	88	86	85	85	85	85
7	98	92	88	85	97	91	88	85	90	87	85	89	86	84	88	86	84	83	83	83	83
8	95	89	86	83	94	89	85	83	88	85	82	87	84	82	86	84	82	81	81	81	81
9	93	87	83	81	92	87	83	81	86	83	81	85	82	80	85	82	80	79	79	79	79
10	91	85	82	79	91	85	81	79	84	81	79	84	81	79	83	80	78	78	78	78	78

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	3219531
5°	2620398
10°	1415448
15°	564396
20°	226286
25°	108383
30°	56171
35°	29693
40°	16487
45°	10187
50°	6985
55°	4731
60°	3651
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P264769

CATALOG NUMBER: LD2B10D010 EU2B1010SP158040 2LBSQLC*MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	425.5	46.7
10°-20°	335.7	36.8
20°-30°	99.0	10.9
30°-40°	33.0	3.6
40°-50°	12.4	1.4
50°-60°	5.5	0.6
60°-70°	0.9	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	860.3	94.3
0°-40°	893.2	97.9
0°-60°	911.1	99.9
0°-90°	912.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	912.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	6526	
5°	5291	426
15°	1105	336
25°	199	99
35°	49	33
45°	15	12
55°	6	5
65°	0	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P264769

CATALOG NUMBER: LD2B10D010 EU2B1010SP158040 2LBSQLC*MMS

CANDELA DISTRIBUTION (FULL):

0°	
0°	6525.7
2.5°	6262.7
5°	5291.1
7.5°	4076.5
10°	2825.4
12.5°	1808.1
15°	1105.0
17.5°	673.9
20°	431.0
22.5°	288.6
25°	199.1
27.5°	140.6
30°	98.6
32.5°	69.4
35°	49.3
37.5°	34.7
40°	25.6
42.5°	20.1
45°	14.6
47.5°	12.8
50°	9.1
52.5°	7.3
55°	5.5
57.5°	5.5
60°	3.7
62.5°	1.8
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)