

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P#

Luminaire Tested: **LD2B10D010 EU2B10WFL559040 2LBDL\*H**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P#  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14807)  
Test Lab: INNOVATION CENTER (G1)  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LD2B10D010 EU2B10WFL559040 2LBDL\*H  
Description: 1000 Lumen, 2inch Portfolio LED Downlight  
WIDE FLOOD OPTIC  
LENSED SPUN ROUND TRIM WITH HAZE FINISH  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 764.5 lumens  
Efficiency: N/A  
Efficacy: 74.2 lumens/watt  
Spacing Criteria (0/90/45): 0.79 / 0.79 / 0.83  
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')  
CIE Type: Direct


Input Watts (W): 10.3  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P#

CATALOG NUMBER: LD2B10D010 EU2B10WFL559040 2LBDL\*H

### Luminous Intensity Polar Plot

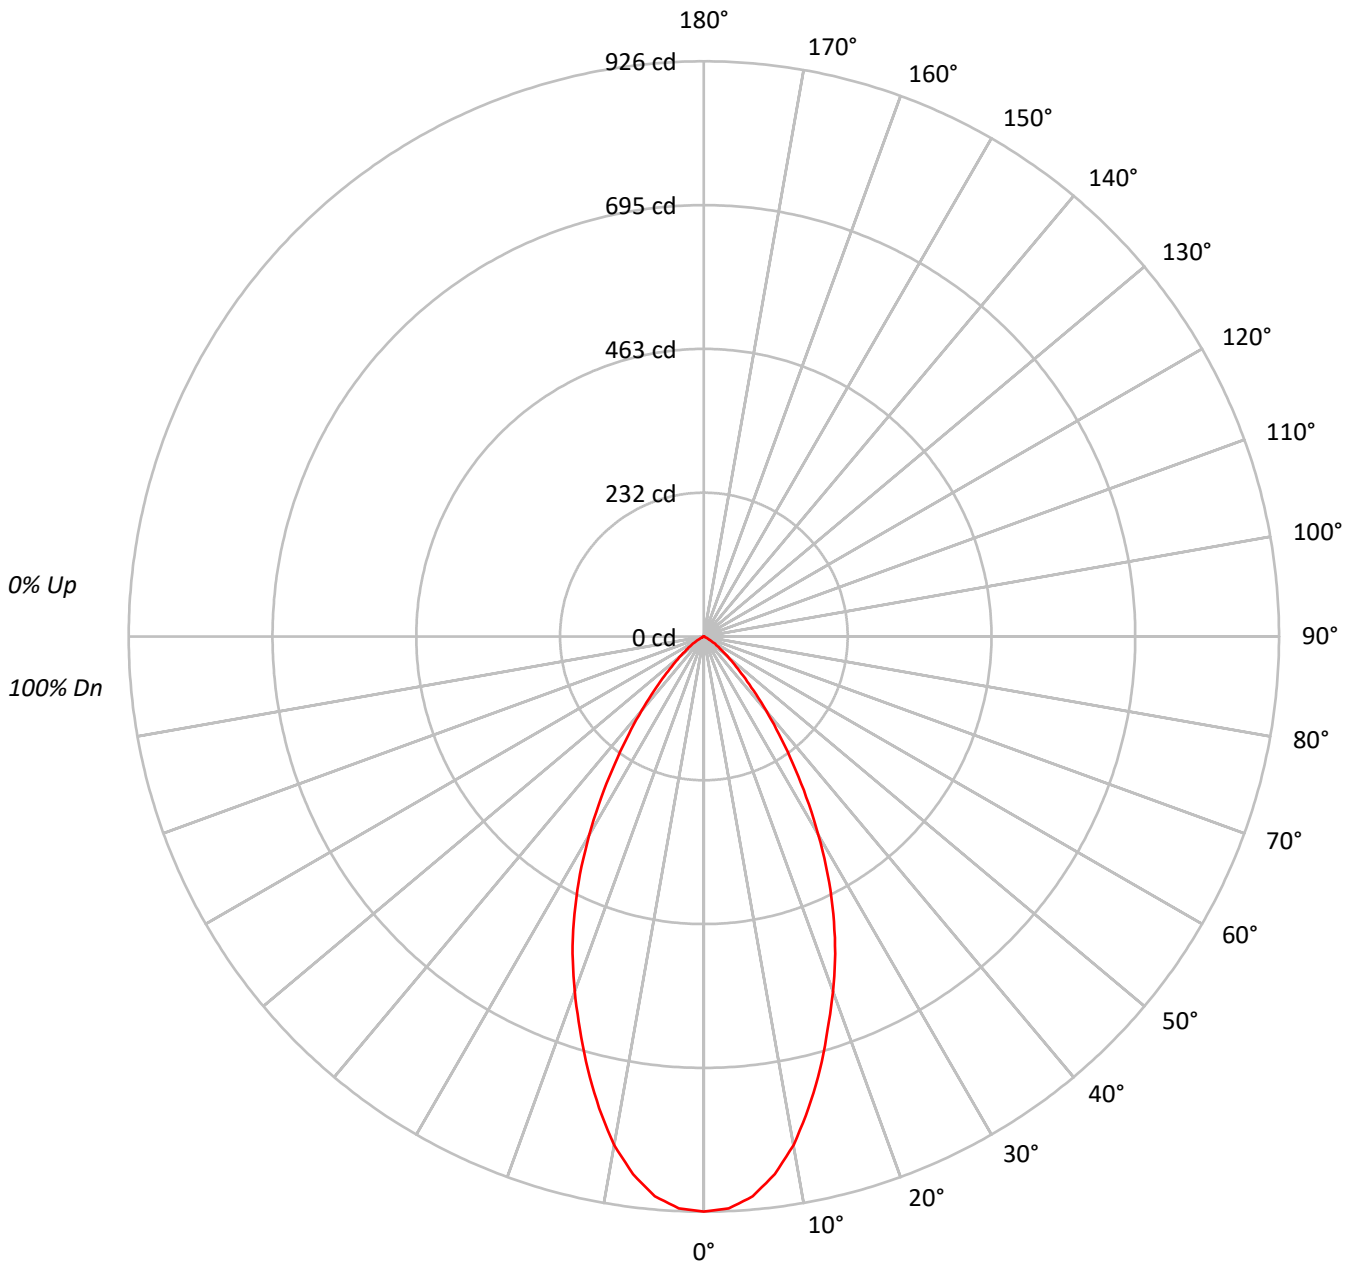



TEST NUMBER: P#

CATALOG NUMBER: LD2B10D010 EU2B10WFL559040 2LBDL\*H

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	111	108	106	111	108	106	104	104	102	101	101	99	98	97	96	95	93			
2	108	102	98	95	105	101	97	94	98	94	92	95	92	90	92	90	88	86			
3	102	95	90	86	100	94	89	85	91	87	84	89	85	83	86	84	81	80			
4	96	89	83	79	95	87	82	78	85	81	77	83	79	76	81	78	75	74			
5	91	83	77	72	90	82	76	72	80	75	71	78	74	71	77	73	70	68			
6	87	77	71	67	85	77	71	67	75	70	66	74	69	66	72	68	65	64			
7	82	73	66	62	81	72	66	62	71	65	62	69	65	61	68	64	61	59			
8	78	68	62	58	77	68	62	58	67	61	57	66	61	57	65	60	57	56			
9	74	64	58	54	73	64	58	54	63	58	54	62	57	54	61	57	54	52			
10	71	61	55	51	70	60	55	51	60	54	51	59	54	51	58	54	50	49			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	358644
5°	351693
10°	326929
15°	289449
20°	250579
25°	210617
30°	164953
35°	117837
40°	78678
45°	48808
50°	29226
55°	17491
60°	7824
65°	1008
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P#

CATALOG NUMBER: LD2B10D010 EU2B10WFL559040 2LBDL\*H

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	83.9	11.0
10°-20°	201.0	26.3
20°-30°	224.2	29.3
30°-40°	157.0	20.5
40°-50°	71.7	9.4
50°-60°	24.0	3.1
60°-70°	2.6	0.3
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	509.2	66.6
0°-40°	666.2	87.1
0°-60°	761.9	99.7
0°-90°	764.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	764.5	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	926	
5°	904	84
15°	722	201
25°	493	224
35°	249	157
45°	89	72
55°	26	24
65°	1	3
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P#

CATALOG NUMBER: LD2B10D010 EU2B10WFL559040 2LBDL\*H

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	925.9
2.5°	921.4
5°	904.5
7.5°	872.9
10°	831.2
12.5°	778.2
15°	721.8
17.5°	663.1
20°	607.9
22.5°	552.6
25°	492.8
27.5°	431.9
30°	368.8
32.5°	306.8
35°	249.2
37.5°	198.5
40°	155.6
42.5°	118.4
45°	89.1
47.5°	66.5
50°	48.5
52.5°	35.0
55°	25.9
57.5°	18.0
60°	10.1
62.5°	3.4
65°	1.1
67.5°	1.1
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)