

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P264139

Luminaire Tested: **LD2B10D010 EU2B1010SP158050 2LBD*B**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P264139
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-1805-787-1)
Test Lab: INNOVATION CENTER(G2)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD2B10D010 EU2B1010SP158050 2LBD*B
Description: 1000 Lumen, 2inch Portfolio LED Downlight
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1008.0 lumens
Efficiency: N/A
Efficacy: 97.9 lumens/watt
Spacing Criteria (0/90/45): 0.28 / 0.28 / 0.28
Luminous Opening: Circular (Dia: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 10.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P264139

CATALOG NUMBER: LD2B10D010 EU2B1010SP158050 2LBD*B

Luminous Intensity Polar Plot

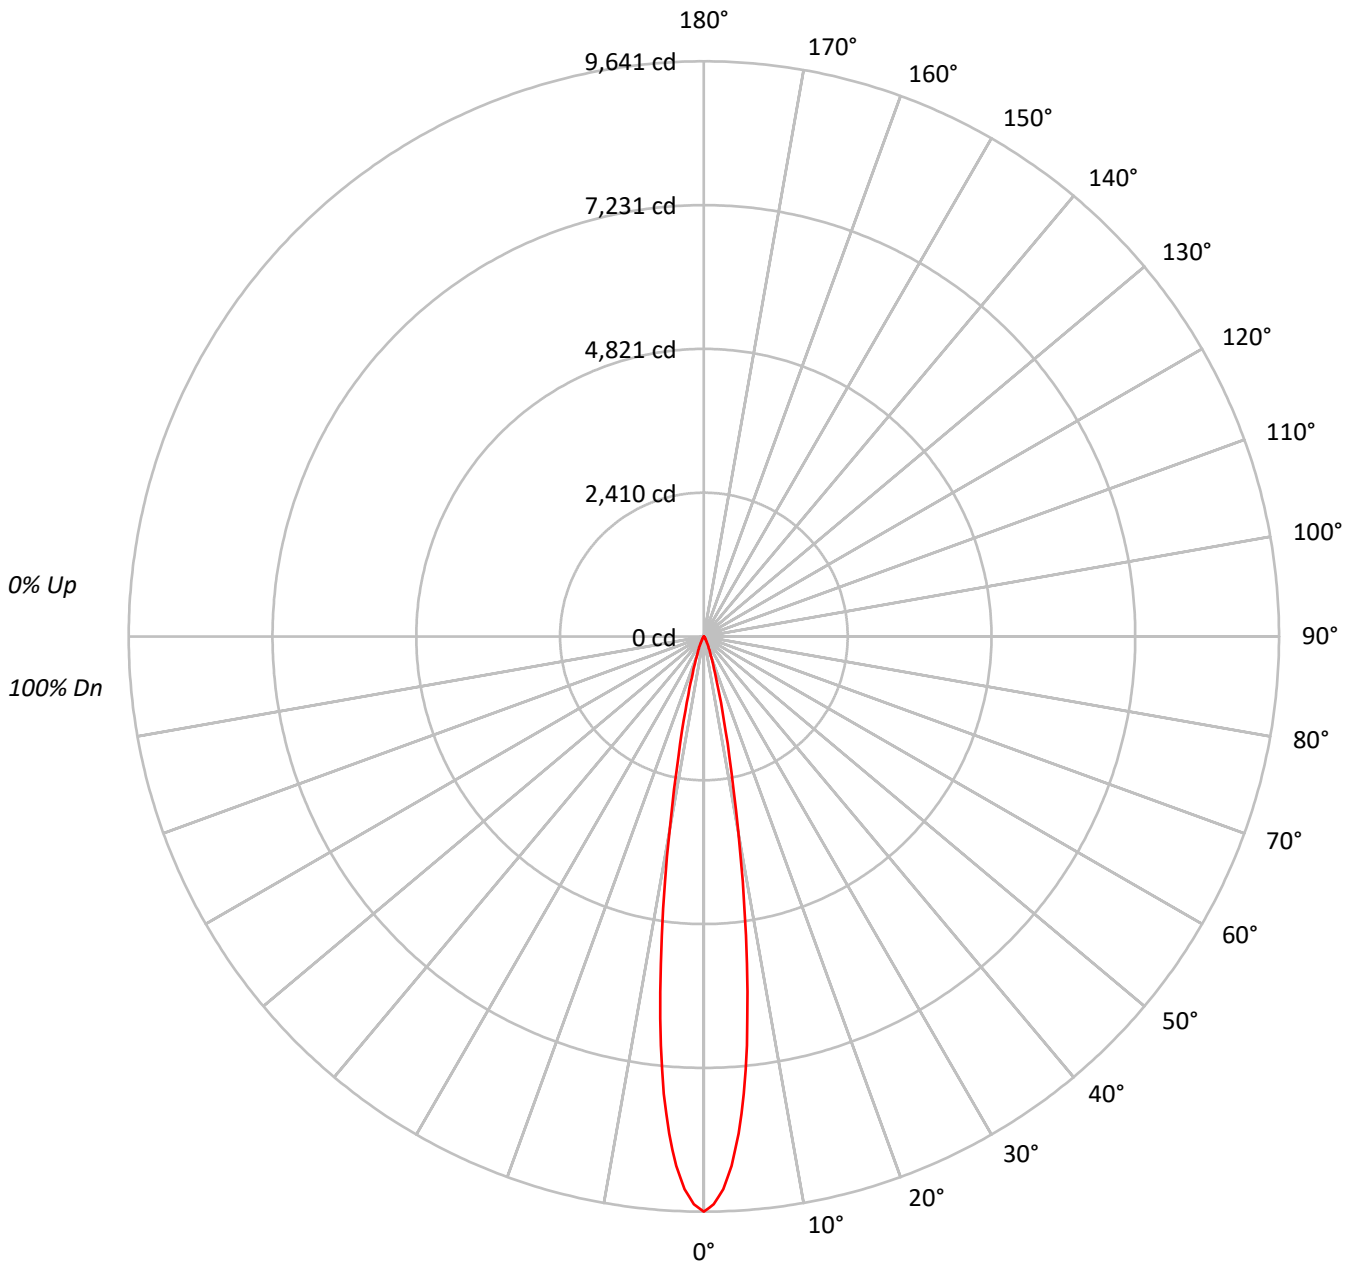



TEST NUMBER: P264139

CATALOG NUMBER: LD2B10D010 EU2B1010SP158050 2LBD*B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	116	114	112	111	113	112	110	109	108	107	106	104	103	102	101	100	100	98			98
2	113	109	107	105	111	108	106	104	105	103	101	102	101	99	99	98	97	96			96
3	110	106	103	100	108	105	102	100	102	100	98	100	98	97	98	96	95	94			94
4	107	103	99	97	106	102	99	96	100	97	95	98	96	94	96	95	93	92			92
5	105	100	97	94	104	99	96	94	98	95	93	96	94	92	95	93	91	90			90
6	103	98	94	92	102	97	94	91	96	93	91	95	92	90	93	91	90	89			89
7	101	95	92	90	100	95	92	89	94	91	89	93	90	89	92	90	88	87			87
8	99	93	90	88	98	93	90	88	92	89	87	91	89	87	91	88	87	86			86
9	97	92	88	86	96	91	88	86	91	88	86	90	87	86	89	87	85	85			85
10	95	90	87	85	95	90	87	85	89	86	85	89	86	84	88	86	84	83			83

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	4756353
5°	3812456
10°	1663981
15°	515669
20°	179768
25°	79423
30°	35947
35°	18671
40°	10691
45°	5024
50°	3147
55°	1806
60°	987
65°	1167
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P264139

CATALOG NUMBER: LD2B10D010 EU2B1010SP158050 2LBD*B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	584.6	58.0
10°-20°	320.2	31.8
20°-30°	73.0	7.2
30°-40°	21.0	2.1
40°-50°	6.5	0.6
50°-60°	1.9	0.2
60°-70°	0.9	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	977.7	97.0
0°-40°	998.7	99.1
0°-60°	1007.1	99.9
0°-90°	1008.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1008.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	9641	
5°	7698	585
15°	1010	320
25°	146	73
35°	31	21
45°	7	6
55°	2	2
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P264139

CATALOG NUMBER: LD2B10D010 EU2B1010SP158050 2LBD*B

CANDELA DISTRIBUTION (FULL):

	0°
0°	9640.7
1°	9520.7
2°	9271.4
3°	8884.6
4°	8352.9
5°	7698.1
6°	6895.4
7°	5998.6
8°	5062.4
9°	4156.3
10°	3321.5
11°	2615.0
12°	2058.5
13°	1619.9
14°	1279.6
15°	1009.6
16°	796.5
17°	634.1
18°	510.0
19°	414.8
20°	342.4
22.5°	221.4
25°	145.9
26°	123.1
27°	104.5
28°	87.9
29°	73.4
30°	63.1
32.5°	43.4
35°	31.0
37.5°	22.8
40°	16.6
42.5°	11.4
45°	7.2
47.5°	5.2
50°	4.1
52.5°	3.1
55°	2.1
57.5°	1.0
60°	1.0
62.5°	1.0
65°	1.0
67.5°	1.0



TEST NUMBER: P264139

CATALOG NUMBER: LD2B10D010 EU2B1010SP158050 2LBD*B

CANDELA DISTRIBUTION (continued):

	0°
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







70°		0.0
72.5°		0.0



(END OF REPORT)