

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P264137

Luminaire Tested: **LD2B10D010 EU2B1010SP158050 2LBD\*WH**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P264137  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-1805-787-1)  
Test Lab: INNOVATION CENTER(G2)  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LD2B10D010 EU2B1010SP158050 2LBD\*WH  
Description: 1000 Lumen, 2inch Portfolio LED Downlight  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1007.0 lumens  
Efficiency: N/A  
Efficacy: 97.8 lumens/watt  
Spacing Criteria (0/90/45): 0.28 / 0.28 / 0.28  
Luminous Opening: Circular (Dia: 0.17' x H: 0')  
CIE Type: Direct


Input Watts (W): 10.3  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P264137

CATALOG NUMBER: LD2B10D010 EU2B1010SP158050 2LBD\*WH

### Luminous Intensity Polar Plot

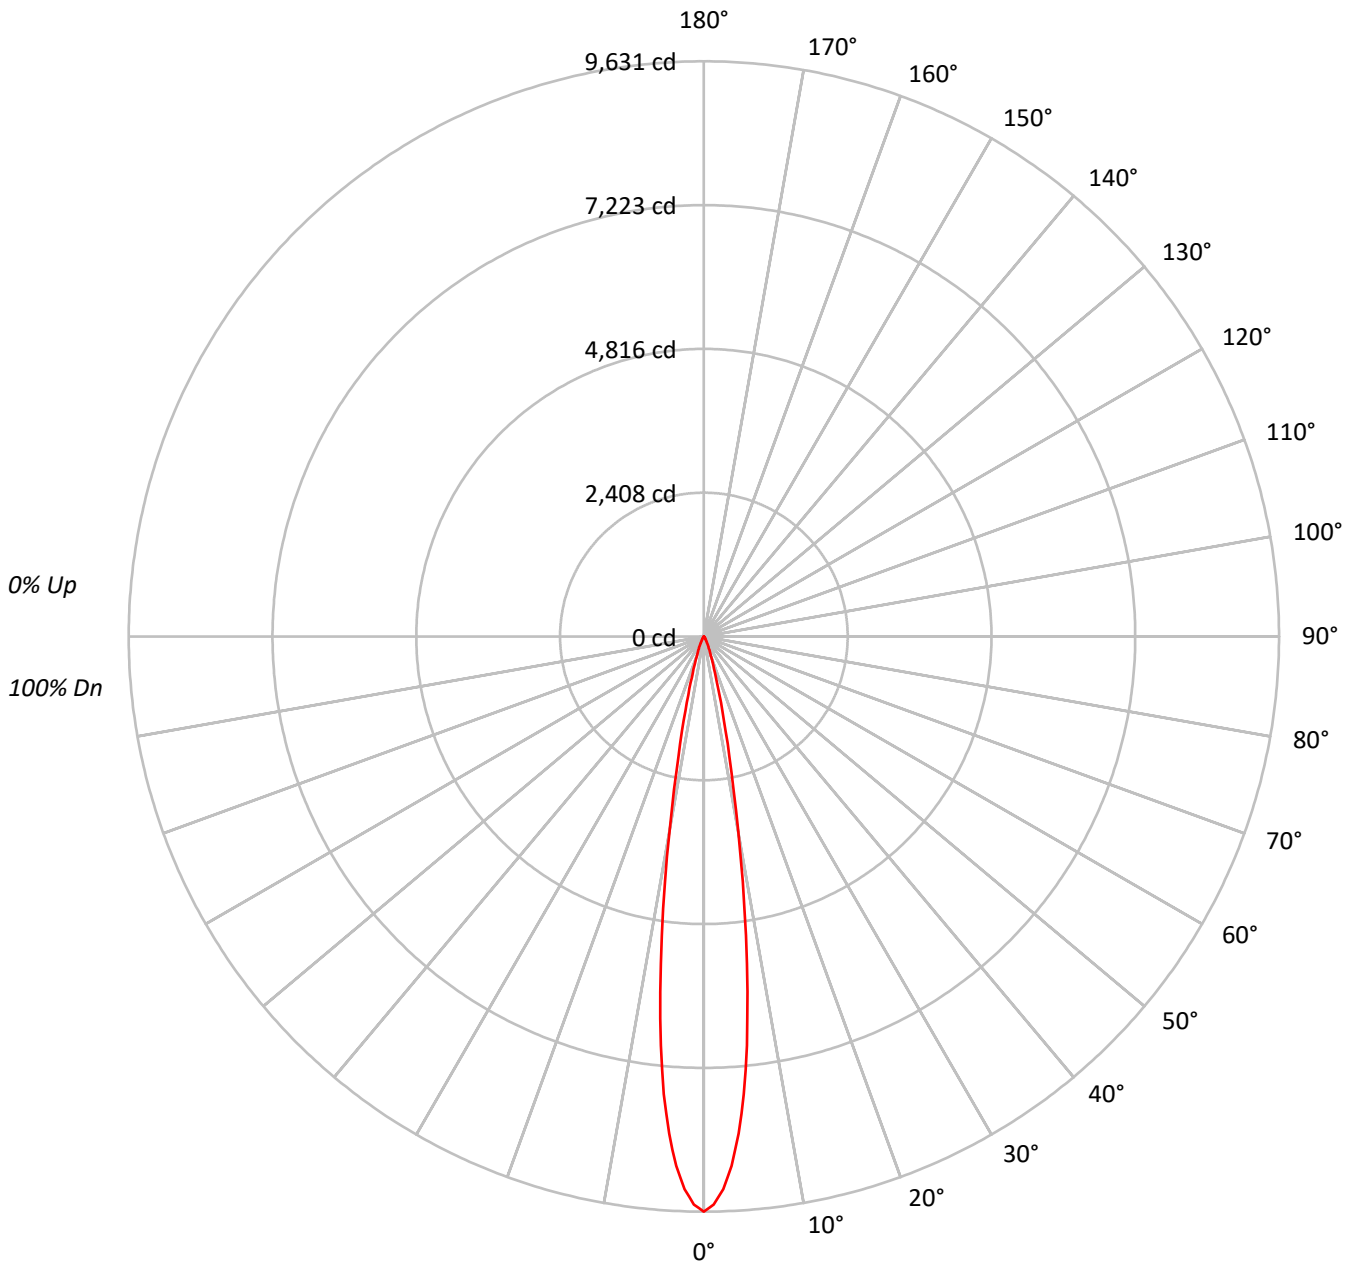



TEST NUMBER: P264137

CATALOG NUMBER: LD2B10D010 EU2B1010SP158050 2LBD\*WH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	116	114	112	111	113	112	110	109	108	107	106	104	103	102	101	100	100	98			98
2	113	109	107	105	111	108	106	104	105	103	101	102	101	99	99	98	97	96			96
3	110	106	103	100	108	105	102	100	102	100	98	100	98	97	98	96	95	94			94
4	107	103	99	97	106	102	99	96	100	97	95	98	96	94	96	95	93	92			92
5	105	100	97	94	104	99	96	94	98	95	93	96	94	92	95	93	91	90			90
6	103	98	94	92	102	97	94	91	96	93	91	95	92	90	93	91	90	89			89
7	101	95	92	90	100	95	92	89	94	91	89	93	90	89	92	90	88	87			87
8	99	93	90	88	98	93	90	88	92	89	87	91	89	87	91	88	87	86			86
9	97	92	88	86	96	91	88	86	91	88	86	90	87	86	89	87	85	85			85
10	95	90	87	85	95	90	87	85	89	86	85	89	86	84	88	86	84	83			83

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	4751617
5°	3808692
10°	1662328
15°	515158
20°	179611
25°	79314
30°	35890
35°	18671
40°	10627
45°	5024
50°	3147
55°	1806
60°	987
65°	1167
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P264137

CATALOG NUMBER: LD2B10D010 EU2B1010SP158050 2LBD\*WH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	584.0	58.0
10°-20°	319.8	31.8
20°-30°	72.9	7.2
30°-40°	20.9	2.1
40°-50°	6.5	0.6
50°-60°	1.9	0.2
60°-70°	0.9	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	976.7	97.0
0°-40°	997.7	99.1
0°-60°	1006.1	99.9
0°-90°	1007.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1007.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	9631	
5°	7690	584
15°	1009	320
25°	146	73
35°	31	21
45°	7	6
55°	2	2
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P264137

CATALOG NUMBER: LD2B10D010 EU2B1010SP158050 2LBD\*WH

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	9631.1
1°	9511.3
2°	9262.2
3°	8875.7
4°	8344.6
5°	7690.5
6°	6888.5
7°	5992.6
8°	5057.4
9°	4152.1
10°	3318.2
11°	2612.4
12°	2056.4
13°	1618.3
14°	1278.3
15°	1008.6
16°	795.7
17°	633.5
18°	509.5
19°	414.4
20°	342.1
22.5°	221.1
25°	145.7
26°	123.0
27°	104.4
28°	87.8
29°	73.4
30°	63.0
32.5°	43.4
35°	31.0
37.5°	22.7
40°	16.5
42.5°	11.4
45°	7.2
47.5°	5.2
50°	4.1
52.5°	3.1
55°	2.1
57.5°	1.0
60°	1.0
62.5°	1.0
65°	1.0
67.5°	1.0



TEST NUMBER: P264137

CATALOG NUMBER: LD2B10D010 EU2B1010SP158050 2LBD\*WH

**CANDELA DISTRIBUTION (continued):**

	0°
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







70°		0.0
72.5°		0.0



(END OF REPORT)