

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P264816

Luminaire Tested: **LD2B10D010 EU2B1010SP158050 2LBLC*MB**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P264816
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1711-432-2)
Test Lab: INNOVATION CENTER(G3)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD2B10D010 EU2B1010SP158050 2LBLC*MB
Description: 1000 Lumen, 2inch Portfolio LED Downlight
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 898.0 lumens
Efficiency: N/A
Efficacy: 87.2 lumens/watt
Spacing Criteria (0/90/45): 0.31 / 0.31 / 0.32
Luminous Opening: Circular (Dia: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 10.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P264816

CATALOG NUMBER: LD2B10D010 EU2B1010SP158050 2LBLC*MB

Luminous Intensity Polar Plot

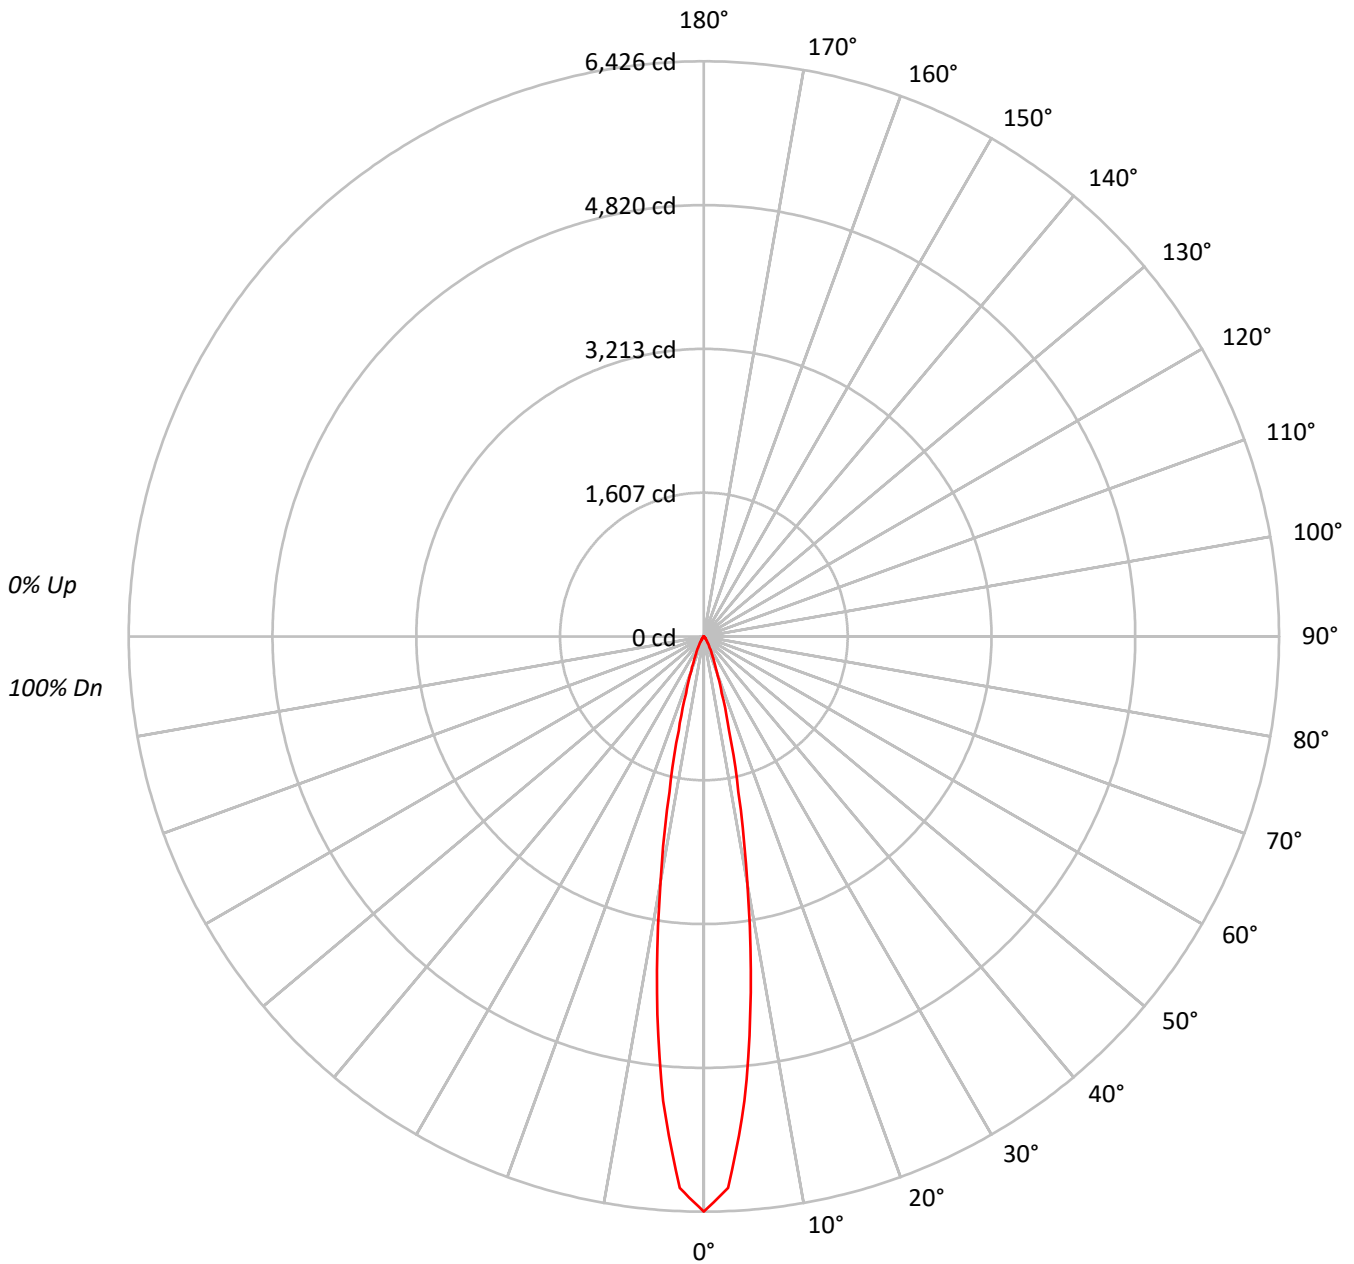



TEST NUMBER: P264816

CATALOG NUMBER: LD2B10D010 EU2B1010SP158050 2LBLC*MB

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									20
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0										
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100									100										
1	115	113	111	110	113	111	110	108	107	106	105	104	103	102	100	99	99	97									97										
2	112	108	106	103	110	107	104	102	104	102	100	101	99	98	98	97	96	94									94										
3	109	104	101	98	107	103	100	97	100	98	96	98	96	94	96	94	93	92									92										
4	105	100	97	94	104	99	96	93	97	95	92	96	93	91	94	92	90	89									89										
5	103	97	93	91	101	96	93	90	95	92	89	93	91	89	92	90	88	87									87										
6	100	94	90	88	99	94	90	87	92	89	87	91	88	86	90	88	86	85									85										
7	98	92	88	85	97	91	88	85	90	87	85	89	86	84	88	86	84	83									83										
8	95	89	86	83	94	89	85	83	88	85	82	87	84	82	86	84	82	81									81										
9	93	87	83	81	92	87	83	81	86	83	81	85	82	80	85	82	80	79									79										
10	91	85	82	79	91	85	81	79	84	81	79	84	81	79	83	80	78	78									78										

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	3170146
5°	2580184
10°	1393756
15°	555713
20°	222820
25°	106695
30°	55316
35°	29271
40°	16230
45°	10047
50°	6908
55°	4645
60°	3552
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P264816

CATALOG NUMBER: LD2B10D010 EU2B1010SP158050 2LBLC*MB

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	419.0	46.7
10°-20°	330.6	36.8
20°-30°	97.5	10.9
30°-40°	32.5	3.6
40°-50°	12.2	1.4
50°-60°	5.4	0.6
60°-70°	0.9	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	847.1	94.3
0°-40°	879.5	97.9
0°-60°	897.2	99.9
0°-90°	898.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	898.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	6426	
5°	5210	419
15°	1088	331
25°	196	98
35°	49	32
45°	14	12
55°	5	5
65°	0	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P264816

CATALOG NUMBER: LD2B10D010 EU2B1010SP158050 2LBLC*MB

CANDELA DISTRIBUTION (FULL):

	0°
0°	6425.6
2.5°	6166.6
5°	5209.9
7.5°	4013.9
10°	2782.1
12.5°	1780.4
15°	1088.0
17.5°	663.6
20°	424.4
22.5°	284.1
25°	196.0
27.5°	138.5
30°	97.1
32.5°	68.3
35°	48.6
37.5°	34.2
40°	25.2
42.5°	19.8
45°	14.4
47.5°	12.6
50°	9.0
52.5°	7.2
55°	5.4
57.5°	5.4
60°	3.6
62.5°	1.8
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)