

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P#

Luminaire Tested: **LD2B10D010 EU2B10WFL558050 2LBDLC\*MW**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P#  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14810)  
Test Lab: INNOVATION CENTER (G1)  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LD2B10D010 EU2B10WFL558050 2LBDLC\*MW  
Description: 1000 Lumen, 2inch Portfolio LED Downlight  
WIDE FLOOD OPTIC  
LENSED CAST ROUND TRIM WITH MATTE WHITE FINISH  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 913.8 lumens  
Efficiency: N/A  
Efficacy: 88.7 lumens/watt  
Spacing Criteria (0/90/45): 0.79 / 0.79 / 0.84  
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')  
CIE Type: Direct

Input Watts (W): 10.3  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P#  
CATALOG NUMBER: LD2B10D010 EU2B10WFL558050 2LBDLC\*MW

### Luminous Intensity Polar Plot

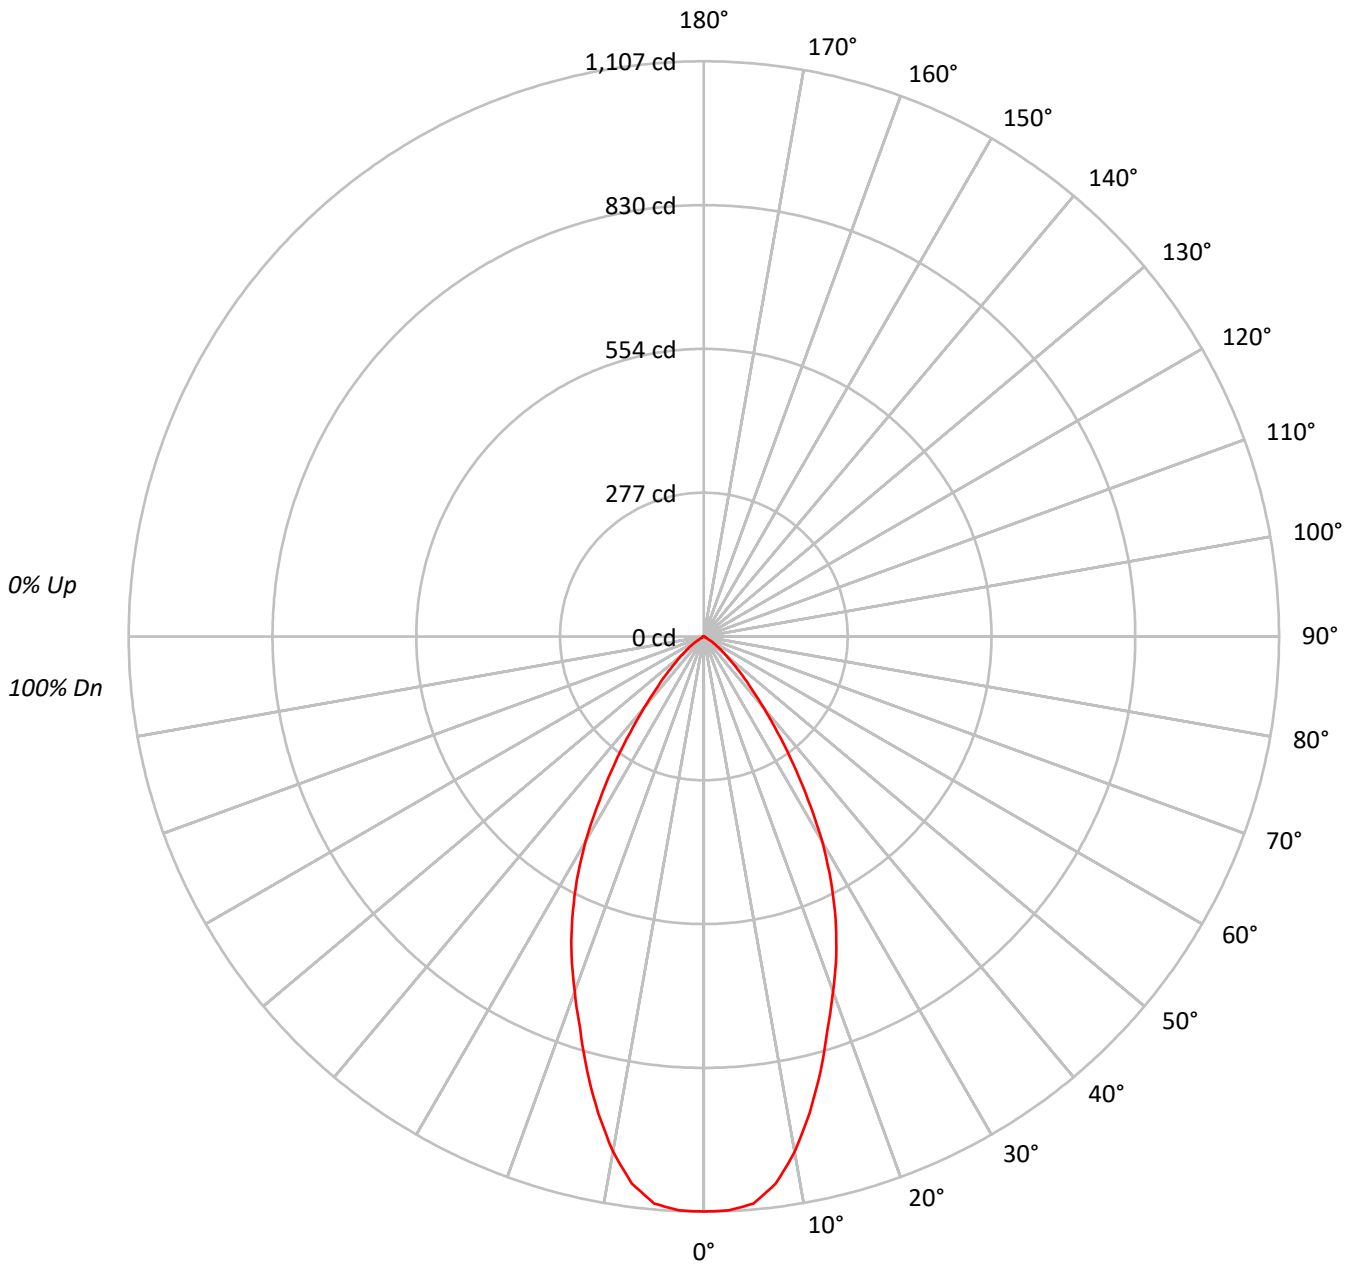



TEST NUMBER: P#

CATALOG NUMBER: LD2B10D010 EU2B10WFL558050 2LBDLC\*MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	110	108	106	111	108	106	104	104	102	101	101	99	98	97	96	95	93			
2	108	102	98	95	105	101	97	94	98	94	92	95	92	90	92	90	88	86			
3	102	95	90	86	100	94	89	85	91	87	84	89	85	83	87	84	81	80			
4	97	89	83	79	95	88	82	78	85	81	77	83	80	76	82	78	76	74			
5	91	83	77	72	90	82	76	72	80	75	72	78	74	71	77	73	70	69			
6	87	78	71	67	85	77	71	67	75	70	66	74	69	66	73	69	65	64			
7	82	73	67	62	81	72	66	62	71	66	62	70	65	62	69	64	61	60			
8	78	69	62	58	77	68	62	58	67	62	58	66	61	58	65	61	57	56			
9	74	65	59	55	73	64	58	54	63	58	54	62	57	54	61	57	54	53			
10	71	61	55	51	70	61	55	51	60	55	51	59	54	51	58	54	51	49			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	428715
5°	425958
10°	395996
15°	347636
20°	299673
25°	256262
30°	203373
35°	141764
40°	89701
45°	54724
50°	32360
55°	17693
60°	3873
65°	3391
70°	2831
75°	3741
80°	2677
85°	5333



TEST NUMBER: P#

CATALOG NUMBER: LD2B10D010 EU2B10WFL558050 2LBDLC\*MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	101.7	11.1
10°-20°	241.4	26.4
20°-30°	272.4	29.8
30°-40°	188.4	20.6
40°-50°	80.3	8.8
50°-60°	23.2	2.5
60°-70°	3.4	0.4
70°-80°	2.1	0.2
80°-90°	0.8	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	615.5	67.4
0°-40°	803.9	88.0
0°-60°	907.5	99.3
0°-90°	913.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	913.8	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1107	
5°	1096	102
15°	867	241
25°	600	272
35°	300	188
45°	100	80
55°	26	23
65°	4	3
75°	2	2
85°	1	1
90°	0	



TEST NUMBER: P#

CATALOG NUMBER: LD2B10D010 EU2B10WFL558050 2LBDLC\*MW

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1106.8
2.5°	1105.5
5°	1095.5
7.5°	1061.8
10°	1006.8
12.5°	939.4
15°	866.9
17.5°	792.0
20°	727.0
22.5°	665.8
25°	599.6
27.5°	529.6
30°	454.7
32.5°	373.5
35°	299.8
37.5°	232.3
40°	177.4
42.5°	133.7
45°	99.9
47.5°	72.5
50°	53.7
52.5°	38.7
55°	26.2
57.5°	11.2
60°	5.0
62.5°	3.7
65°	3.7
67.5°	2.5
70°	2.5
72.5°	2.5
75°	2.5
77.5°	1.2
80°	1.2
82.5°	1.2
85°	1.2
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)