

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P#

Luminaire Tested: **LD2B10D010 EU2B10FL409030D2W 2LBD*LI**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P#
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P29152)
Test Lab: INNOVATION CENTER-P2
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD2B10D010 EU2B10FL409030D2W 2LBD*LI
Description: 1000 Lumen, 2inch Portfolio LED Downlight
FLOOD OPTIC
SPUN ROUND TRIM WITH LI FINISH
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 614.1 lumens
Efficiency: N/A
Efficacy: 59.6 lumens/watt
Spacing Criteria (0/90/45): 0.59 / 0.59 / 0.58
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 10.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P#

CATALOG NUMBER: LD2B10D010 EU2B10FL409030D2W 2LBD*LI

Luminous Intensity Polar Plot

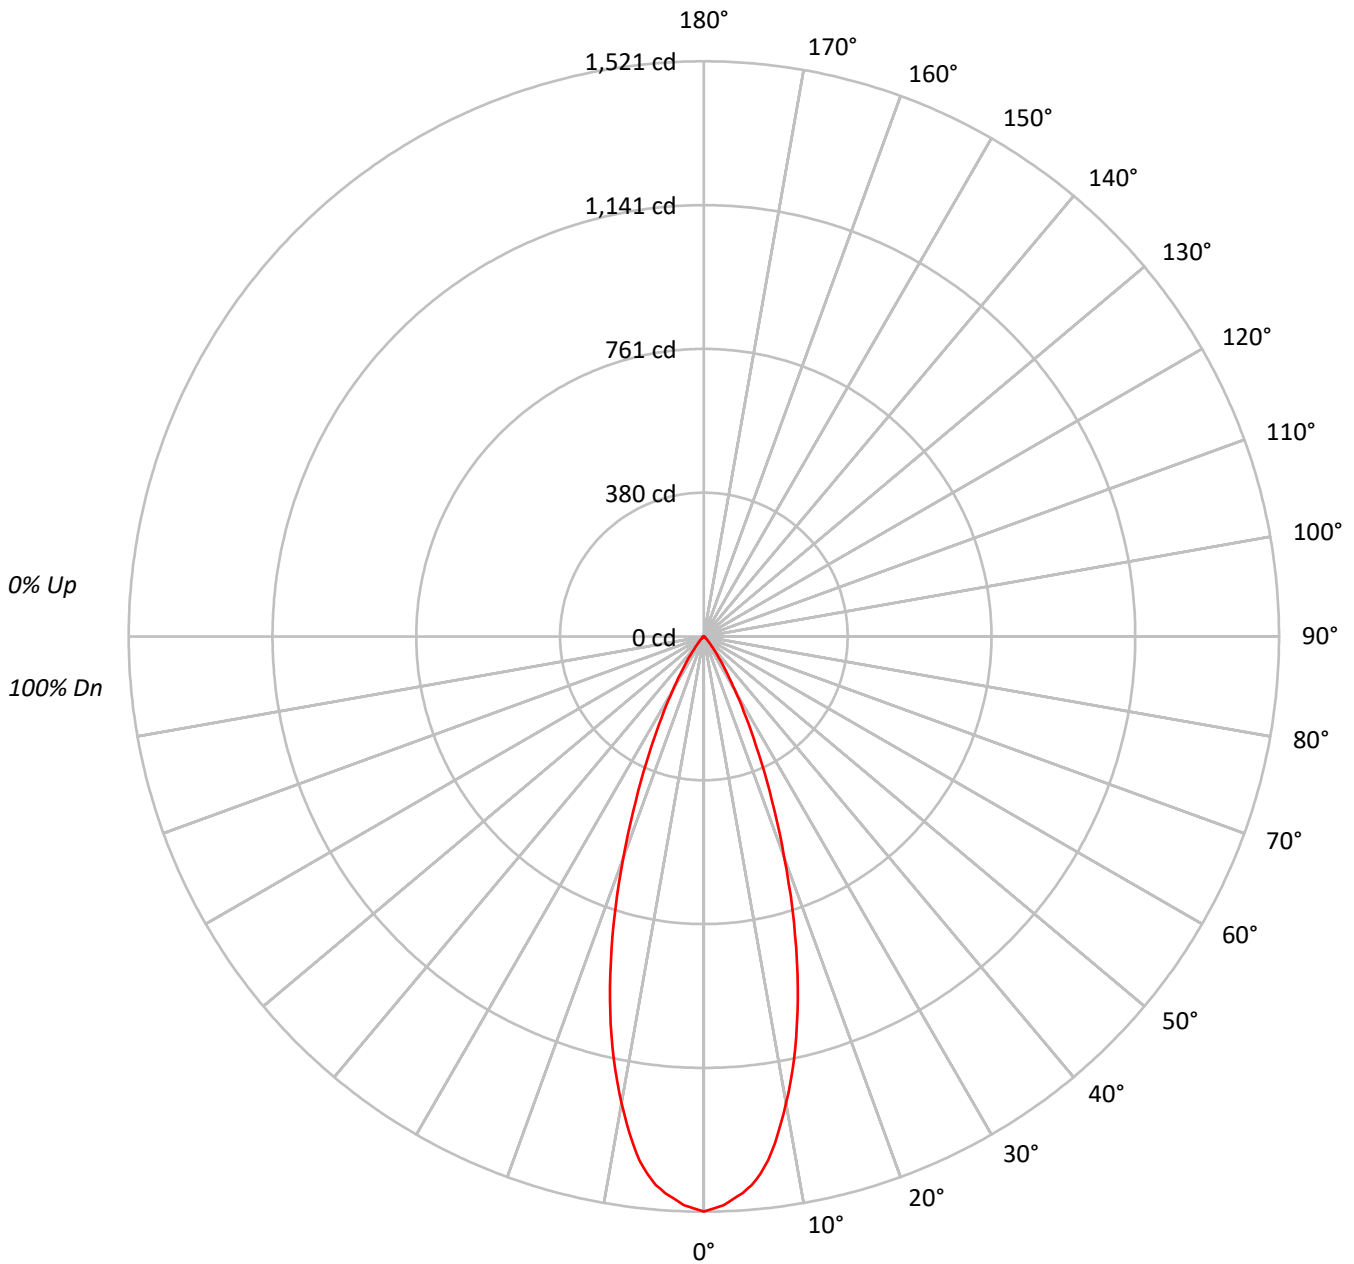



TEST NUMBER: P#

CATALOG NUMBER: LD2B10D010 EU2B10FL409030D2W 2LBD*LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	114	112	110	108	112	110	108	106	106	105	103	102	101	100	99	98	97	96			96
2	110	106	103	100	108	104	101	99	101	99	97	98	96	95	96	94	93	91			91
3	106	101	96	93	104	99	95	92	97	94	91	94	92	90	92	90	88	87			87
4	102	96	91	88	100	95	90	87	93	89	86	91	88	85	89	86	84	83			83
5	98	91	86	83	97	90	86	83	89	85	82	87	84	81	86	83	81	79			79
6	94	87	82	79	93	86	82	79	85	81	78	84	80	78	83	79	77	76			76
7	91	83	79	75	90	83	78	75	82	78	75	81	77	74	80	76	74	73			73
8	88	80	75	72	87	80	75	72	79	74	71	78	74	71	77	73	71	70			70
9	85	77	72	69	84	76	72	69	76	71	69	75	71	68	74	71	68	67			67
10	82	74	69	66	81	74	69	66	73	69	66	72	68	66	72	68	66	65			65

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	589037
5°	566052
10°	492753
15°	384769
20°	255897
25°	146552
30°	72860
35°	33479
40°	13450
45°	6135
50°	2832
55°	1621
60°	930
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P#

CATALOG NUMBER: LD2B10D010 EU2B10FL409030D2W 2LBD*LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	132.5	21.6
10°-20°	260.2	42.4
20°-30°	161.0	26.2
30°-40°	48.2	7.8
40°-50°	9.7	1.6
50°-60°	2.4	0.4
60°-70°	0.1	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	553.7	90.2
0°-40°	601.9	98.0
0°-60°	614.0	100.0
0°-90°	614.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	614.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1521	
5°	1456	132
15°	960	260
25°	343	161
35°	71	48
45°	11	10
55°	2	2
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P#

CATALOG NUMBER: LD2B10D010 EU2B10FL409030D2W 2LBD*LI

CANDELA DISTRIBUTION (FULL):

	0°
0°	1520.7
1°	1512.5
2°	1504.8
3°	1489.5
4°	1475.3
5°	1455.8
6°	1429.2
7°	1395.7
8°	1352.5
9°	1303.5
10°	1252.8
11°	1200.3
12°	1144.2
13°	1085.8
14°	1023.2
15°	959.5
17.5°	791.4
20°	620.8
22.5°	469.7
25°	342.9
27.5°	240.8
30°	162.9
32.5°	107.4
35°	70.8
37.5°	44.2
40°	26.6
42.5°	17.1
45°	11.2
47.5°	7.1
50°	4.7
52.5°	3.6
55°	2.4
57.5°	1.8
60°	1.2
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0



TEST NUMBER: P#

CATALOG NUMBER: LD2B10D010 EU2B10FL409030D2W 2LBD*LI

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







85°		0.0
87.5°		0.0



(END OF REPORT)