

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P222801

Luminaire Tested: **LD2B10D010 EU2B10NFL259030D2W 2LBDC*MB**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P222801
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (155)
Test Lab: INNOVATION CENTER-P2
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD2B10D010 EU2B10NFL259030D2W 2LBDC*MB
Description: 1000 Lumen, 2inch Portfolio LED Downlight
NARROW FLOOD OPTIC
CAST ROUND TRIM WITH MATTE BLACK FINISH
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 598.3 lumens
Efficiency: N/A
Efficacy: 58.1 lumens/watt
Spacing Criteria (0/90/45): 0.39 / 0.39 / 0.35
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 10.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P222801

CATALOG NUMBER: LD2B10D010 EU2B10NFL259030D2W 2LBDC*MB

Luminous Intensity Polar Plot

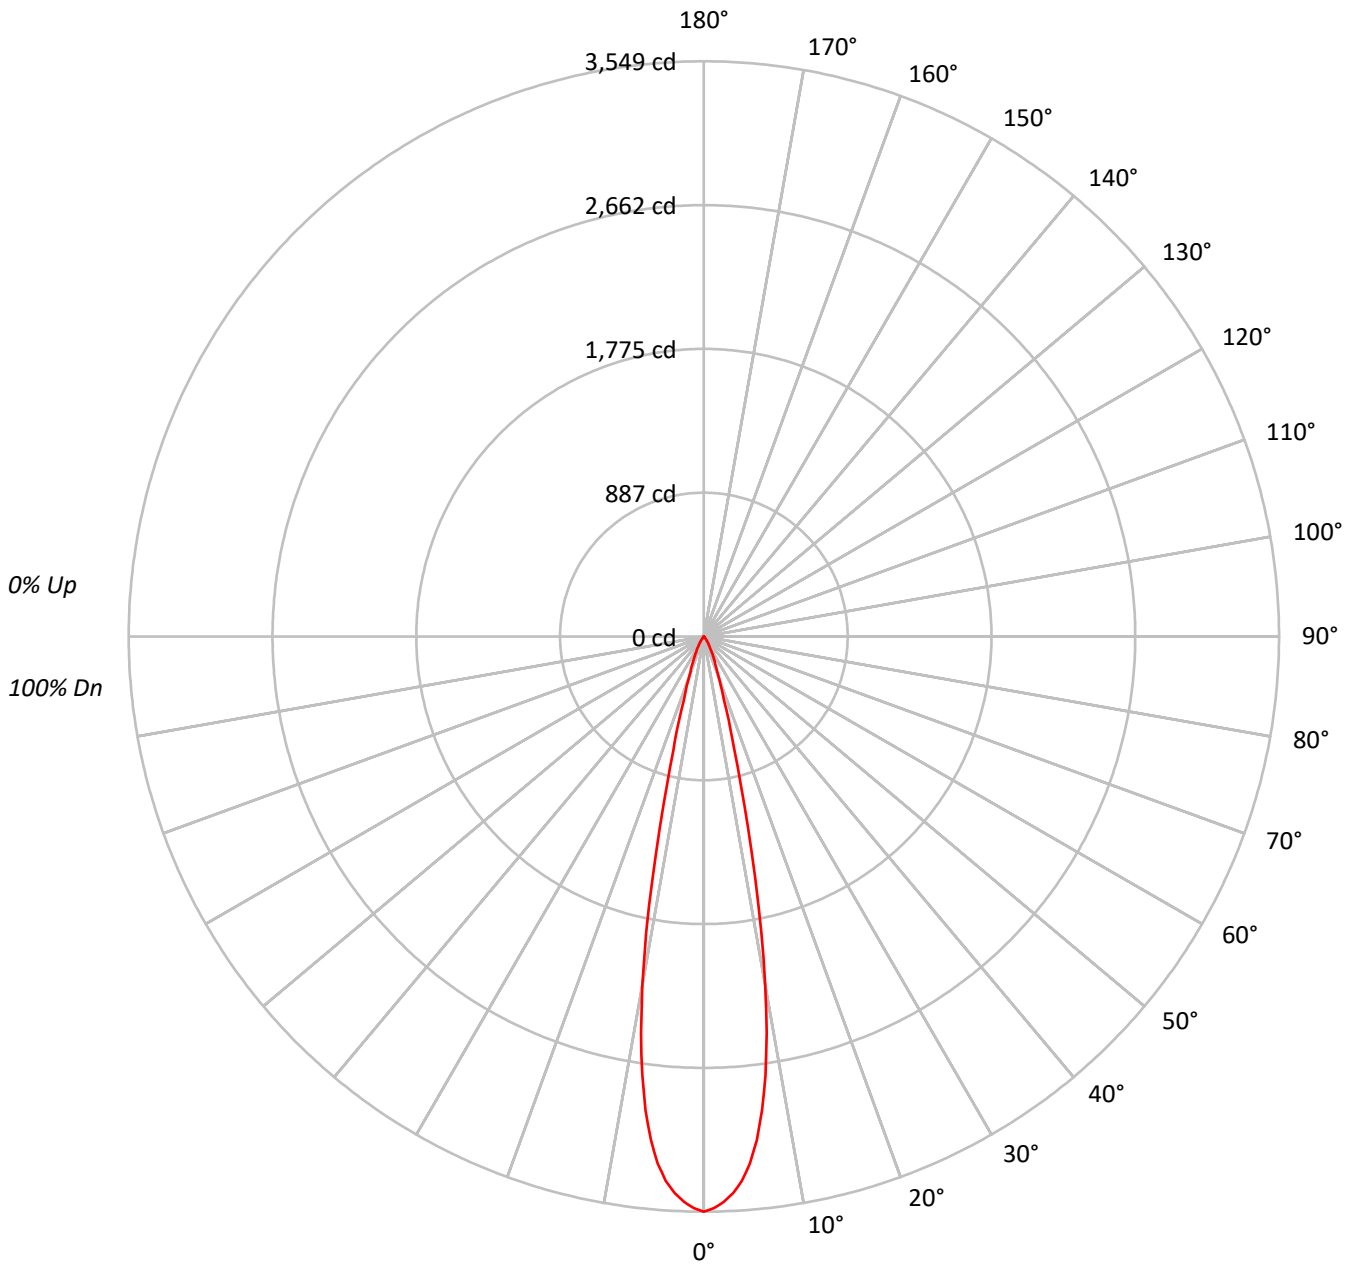



TEST NUMBER: P222801

CATALOG NUMBER: LD2B10D010 EU2B10NFL259030D2W 2LBDC*MB

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100						100													
1	115	113	112	110	113	111	110	108	107	106	105	104	103	102	100	100	99	97						97													
2	112	109	106	104	110	107	104	102	104	102	100	101	99	98	98	97	96	95						95													
3	109	105	101	99	107	103	100	98	101	98	96	99	97	95	96	95	93	92						92													
4	106	101	97	95	104	100	97	94	98	95	93	96	94	92	95	93	91	90						90													
5	103	98	94	91	102	97	94	91	95	92	90	94	91	89	93	90	89	88						88													
6	101	95	91	89	99	94	91	88	93	90	88	92	89	87	91	88	87	86						86													
7	98	92	89	86	97	92	88	86	91	88	85	90	87	85	89	86	85	84						84													
8	96	90	86	84	95	90	86	84	89	86	83	88	85	83	87	85	83	82						82													
9	94	88	84	82	93	88	84	82	87	84	82	86	83	81	85	83	81	80						80													
10	92	86	82	80	91	86	82	80	85	82	80	84	82	80	84	81	79	79						79													

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1374730
5°	1269321
10°	859132
15°	292296
20°	107379
25°	56928
30°	29251
35°	13666
40°	4450
45°	2246
50°	1085
55°	405
60°	465
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P222801

CATALOG NUMBER: LD2B10D010 EU2B10NFL259030D2W 2LBDC*MB

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	277.7	46.4
10°-20°	233.5	39.0
20°-30°	64.1	10.7
30°-40°	18.7	3.1
40°-50°	3.5	0.6
50°-60°	0.8	0.1
60°-70°	0.1	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	575.2	96.2
0°-40°	593.9	99.3
0°-60°	598.2	100.0
0°-90°	598.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	598.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3549	
5°	3264	278
15°	729	233
25°	133	64
35°	29	19
45°	4	3
55°	1	1
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P222801

CATALOG NUMBER: LD2B10D010 EU2B10NFL259030D2W 2LBDC*MB

CANDELA DISTRIBUTION (FULL):

	0°
0°	3549.1
1°	3528.5
2°	3491.9
3°	3439.5
4°	3367.6
5°	3264.5
6°	3123.6
7°	2947.4
8°	2732.4
9°	2478.4
10°	2184.3
11°	1862.0
12°	1526.8
13°	1206.8
14°	933.9
15°	728.9
17.5°	411.3
20°	260.5
22.5°	185.6
25°	133.2
27.5°	94.3
30°	65.4
32.5°	45.9
35°	28.9
37.5°	11.8
40°	8.8
42.5°	6.5
45°	4.1
47.5°	2.4
50°	1.8
52.5°	1.2
55°	0.6
57.5°	0.6
60°	0.6
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0



TEST NUMBER: P222801

CATALOG NUMBER: LD2B10D010 EU2B10NFL259030D2W 2LBDC*MB

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







85°		0.0
87.5°		0.0



(END OF REPORT)