

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P#

Luminaire Tested: **LD2B10D010 EU2B10WFL559030D2W 2LBD*MW**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P#
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14810)
Test Lab: INNOVATION CENTER (G1)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD2B10D010 EU2B10WFL559030D2W 2LBD*MW
Description: 1000 Lumen, 2inch Portfolio LED Downlight
WIDE FLOOD OPTIC
SPUN ROUND TRIM WITH MATTE WHITE FINISH
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 581.5 lumens
Efficiency: N/A
Efficacy: 56.5 lumens/watt
Spacing Criteria (0/90/45): 0.79 / 0.79 / 0.84
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 10.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P#

CATALOG NUMBER: LD2B10D010 EU2B10WFL559030D2W 2LBD*MW

Luminous Intensity Polar Plot

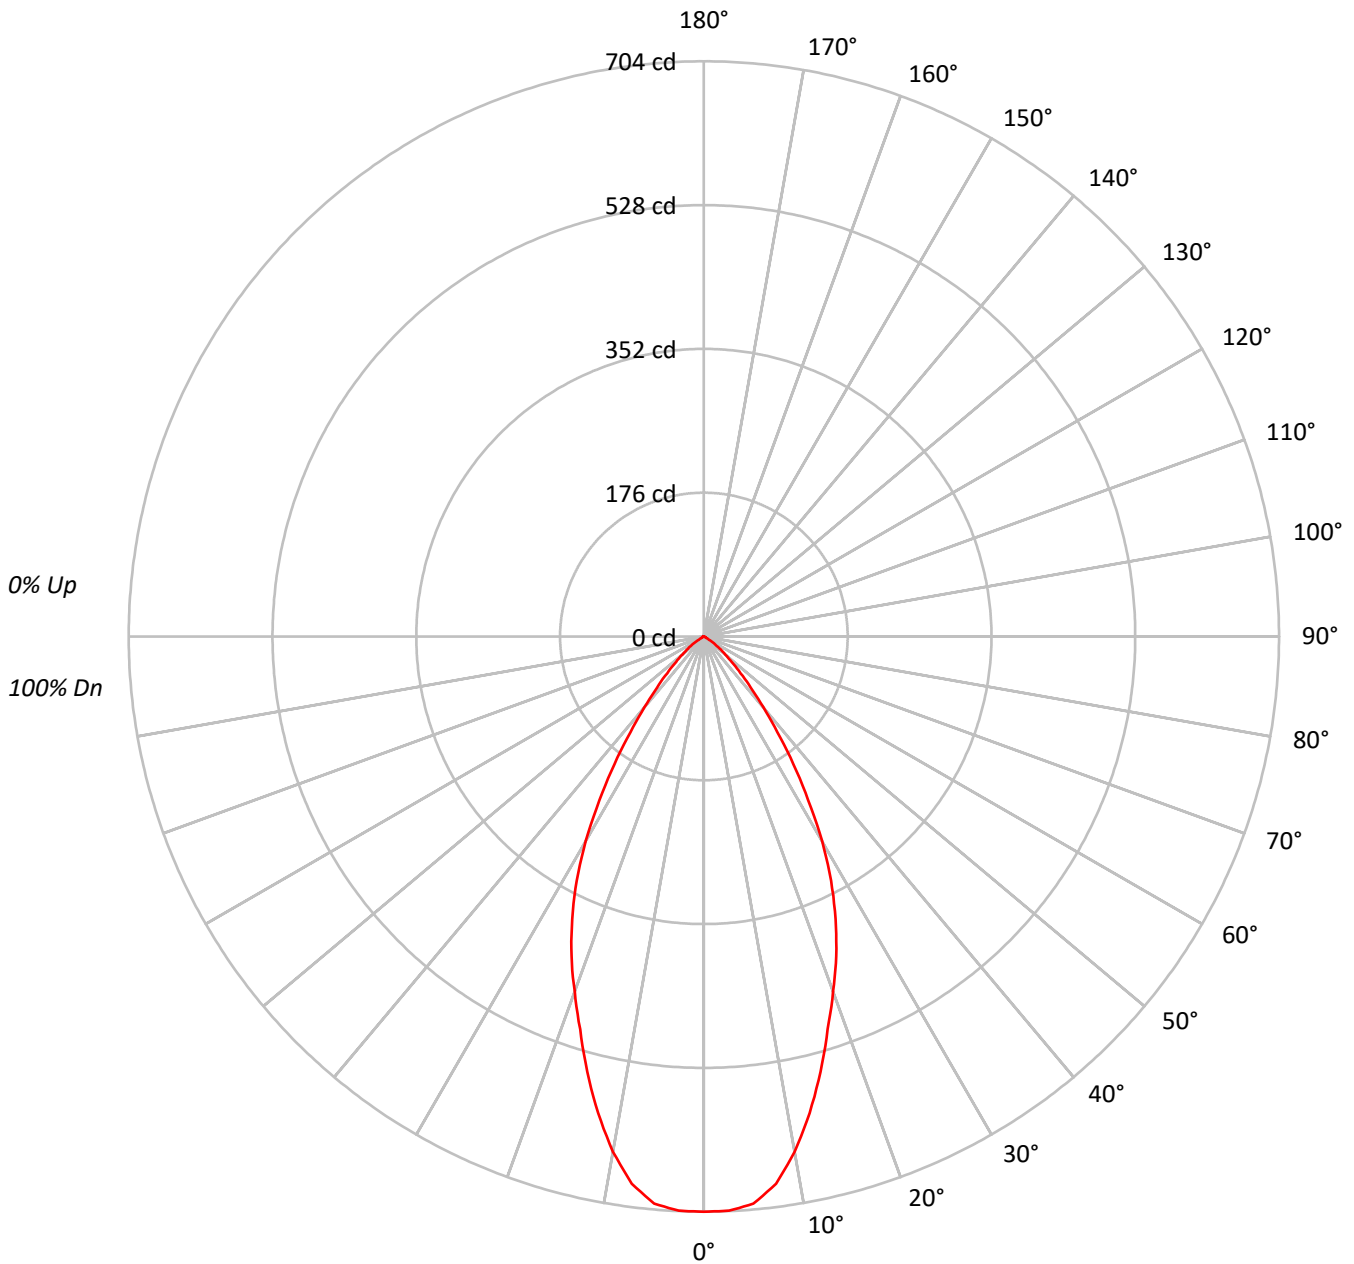



TEST NUMBER: P#

CATALOG NUMBER: LD2B10D010 EU2B10WFL559030D2W 2LBD*MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	110	108	106	111	108	106	104	104	102	101	101	99	98	97	96	95	93			
2	108	102	98	95	105	101	97	94	98	94	92	95	92	90	92	90	88	86			
3	102	95	90	86	100	94	89	85	91	87	84	89	85	83	87	84	81	80			
4	97	89	83	79	95	88	82	78	85	81	77	83	80	76	82	78	76	74			
5	91	83	77	72	90	82	76	72	80	75	71	78	74	71	77	73	70	69			
6	87	78	71	67	85	77	71	67	75	70	66	74	69	66	73	69	65	64			
7	82	73	67	62	81	72	66	62	71	66	62	70	65	62	69	64	61	60			
8	78	69	62	58	77	68	62	58	67	62	58	66	61	58	65	61	57	56			
9	74	65	59	55	73	64	58	54	63	58	54	62	57	54	61	57	54	53			
10	71	61	55	51	70	61	55	51	60	55	51	59	54	51	58	54	51	49			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	272730
5°	271011
10°	251962
15°	221157
20°	190645
25°	163049
30°	129395
35°	90222
40°	57037
45°	34839
50°	20609
55°	11278
60°	2479
65°	2200
70°	1812
75°	2395
80°	1785
85°	3555



TEST NUMBER: P#

CATALOG NUMBER: LD2B10D010 EU2B10WFL559030D2W 2LBD*MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	64.7	11.1
10°-20°	153.6	26.4
20°-30°	173.3	29.8
30°-40°	119.9	20.6
40°-50°	51.1	8.8
50°-60°	14.8	2.5
60°-70°	2.2	0.4
70°-80°	1.4	0.2
80°-90°	0.5	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	391.6	67.3
0°-40°	511.5	88.0
0°-60°	577.4	99.3
0°-90°	581.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	581.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	704	
5°	697	65
15°	552	154
25°	382	173
35°	191	120
45°	64	51
55°	17	15
65°	2	2
75°	2	1
85°	1	1
90°	0	



TEST NUMBER: P#

CATALOG NUMBER: LD2B10D010 EU2B10WFL559030D2W 2LBD*MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	704.1
2.5°	703.4
5°	697.0
7.5°	675.6
10°	640.6
12.5°	597.6
15°	551.5
17.5°	503.9
20°	462.5
22.5°	423.6
25°	381.5
27.5°	337.0
30°	289.3
32.5°	237.6
35°	190.8
37.5°	147.8
40°	112.8
42.5°	85.0
45°	63.6
47.5°	46.1
50°	34.2
52.5°	24.6
55°	16.7
57.5°	7.2
60°	3.2
62.5°	2.4
65°	2.4
67.5°	1.6
70°	1.6
72.5°	1.6
75°	1.6
77.5°	0.8
80°	0.8
82.5°	0.8
85°	0.8
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)