

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P#

Luminaire Tested: **LD2B10D010 EU2B10WFL559030D2W 2LBDLC*MW**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P#
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14810)
Test Lab: INNOVATION CENTER (G1)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD2B10D010 EU2B10WFL559030D2W 2LBDLC*MW
Description: 1000 Lumen, 2inch Portfolio LED Downlight
WIDE FLOOD OPTIC
LENSED CAST ROUND TRIM WITH MATTE WHITE FINISH
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 521.2 lumens
Efficiency: N/A
Efficacy: 50.6 lumens/watt
Spacing Criteria (0/90/45): 0.79 / 0.79 / 0.84
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')
CIE Type: Direct

Input Watts (W): 10.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P#
CATALOG NUMBER: LD2B10D010 EU2B10WFL559030D2W 2LBDLC*MW

Luminous Intensity Polar Plot

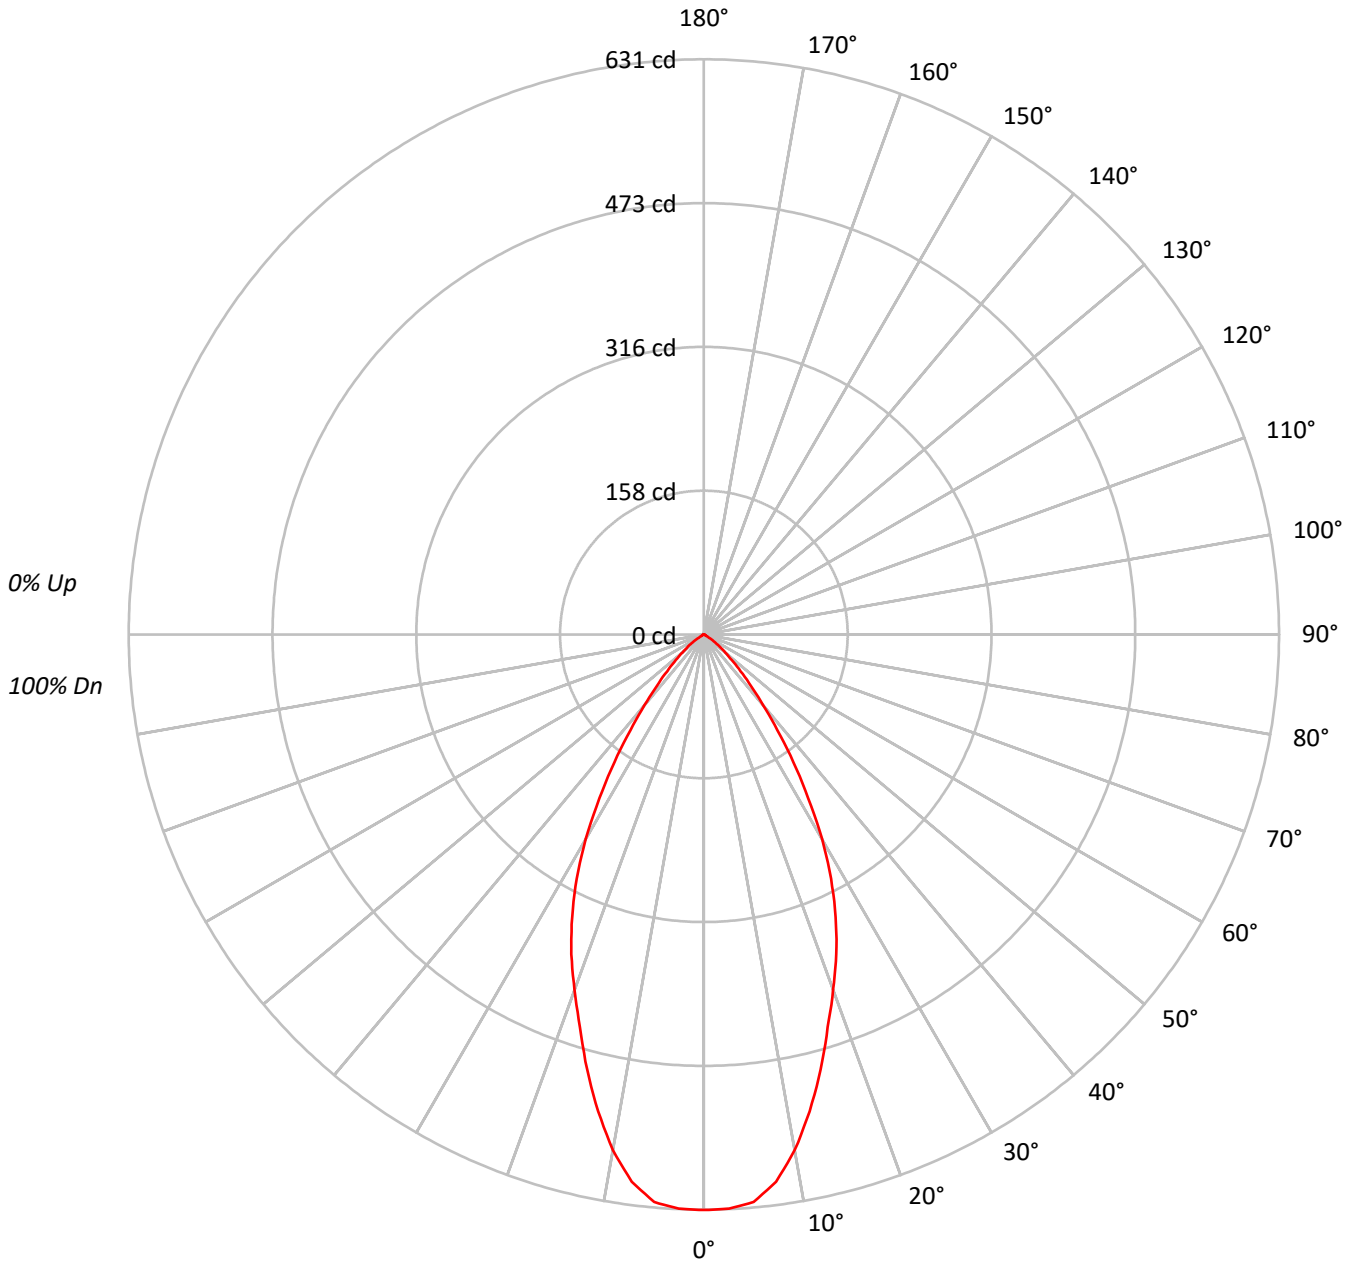



TEST NUMBER: P#

CATALOG NUMBER: LD2B10D010 EU2B10WFL559030D2W 2LBDLC*MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	110	108	106	111	108	106	104	104	102	101	101	99	98	97	96	95	93			
2	108	102	98	95	105	101	97	94	98	94	92	95	92	90	92	90	88	86			
3	102	95	90	86	100	94	89	85	91	87	84	89	85	83	87	84	81	80			
4	97	89	83	79	95	88	82	78	85	81	77	83	80	76	82	78	76	74			
5	91	83	77	72	90	82	76	72	80	75	72	78	74	71	77	73	70	69			
6	87	78	71	67	85	77	71	67	75	70	66	74	69	66	73	69	65	64			
7	82	73	67	62	81	72	66	62	71	66	62	70	65	62	69	64	61	60			
8	78	69	62	58	77	68	62	58	67	62	58	66	61	58	65	61	57	56			
9	74	65	59	55	73	64	58	54	63	58	54	62	57	54	61	57	54	53			
10	71	61	55	51	70	61	55	51	60	55	51	59	54	51	58	54	51	49			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	244532
5°	242977
10°	225884
15°	198299
20°	170941
25°	146167
30°	115977
35°	80859
40°	51121
45°	31224
50°	18440
55°	10062
60°	2247
65°	1925
70°	1586
75°	2095
80°	1561
85°	3111



TEST NUMBER: P#

CATALOG NUMBER: LD2B10D010 EU2B10WFL559030D2W 2LBDLC*MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	58.0	11.1
10°-20°	137.7	26.4
20°-30°	155.4	29.8
30°-40°	107.5	20.6
40°-50°	45.8	8.8
50°-60°	13.2	2.5
60°-70°	1.9	0.4
70°-80°	1.2	0.2
80°-90°	0.5	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	351.1	67.4
0°-40°	458.5	88.0
0°-60°	517.6	99.3
0°-90°	521.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	521.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	631	
5°	625	58
15°	494	138
25°	342	155
35°	171	107
45°	57	46
55°	15	13
65°	2	2
75°	1	1
85°	1	0
90°	0	



TEST NUMBER: P#

CATALOG NUMBER: LD2B10D010 EU2B10WFL559030D2W 2LBDLC*MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	631.3
2.5°	630.6
5°	624.9
7.5°	605.6
10°	574.3
12.5°	535.8
15°	494.5
17.5°	451.7
20°	414.7
22.5°	379.8
25°	342.0
27.5°	302.1
30°	259.3
32.5°	213.0
35°	171.0
37.5°	132.5
40°	101.1
42.5°	76.2
45°	57.0
47.5°	41.4
50°	30.6
52.5°	22.1
55°	14.9
57.5°	6.4
60°	2.9
62.5°	2.1
65°	2.1
67.5°	1.4
70°	1.4
72.5°	1.4
75°	1.4
77.5°	0.7
80°	0.7
82.5°	0.7
85°	0.7
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)