

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P#

Luminaire Tested: **LD2B15D010 EU2B15WFL559024 2LBDLC\*MW**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P#  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14810)  
Test Lab: INNOVATION CENTER (G1)  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LD2B15D010 EU2B15WFL559024 2LBDLC\*MW  
Description: 1500 Lumen, 2inch Portfolio LED Downlight  
WIDE FLOOD OPTIC  
LENSED CAST ROUND TRIM WITH MATTE WHITE FINISH  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 844.0 lumens  
Efficiency: N/A  
Efficacy: 59.0 lumens/watt  
Spacing Criteria (0/90/45): 0.79 / 0.79 / 0.84  
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')  
CIE Type: Direct

Input Watts (W): 14.3  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P#  
CATALOG NUMBER: LD2B15D010 EU2B15WFL559024 2LBDLC\*MW

### Luminous Intensity Polar Plot

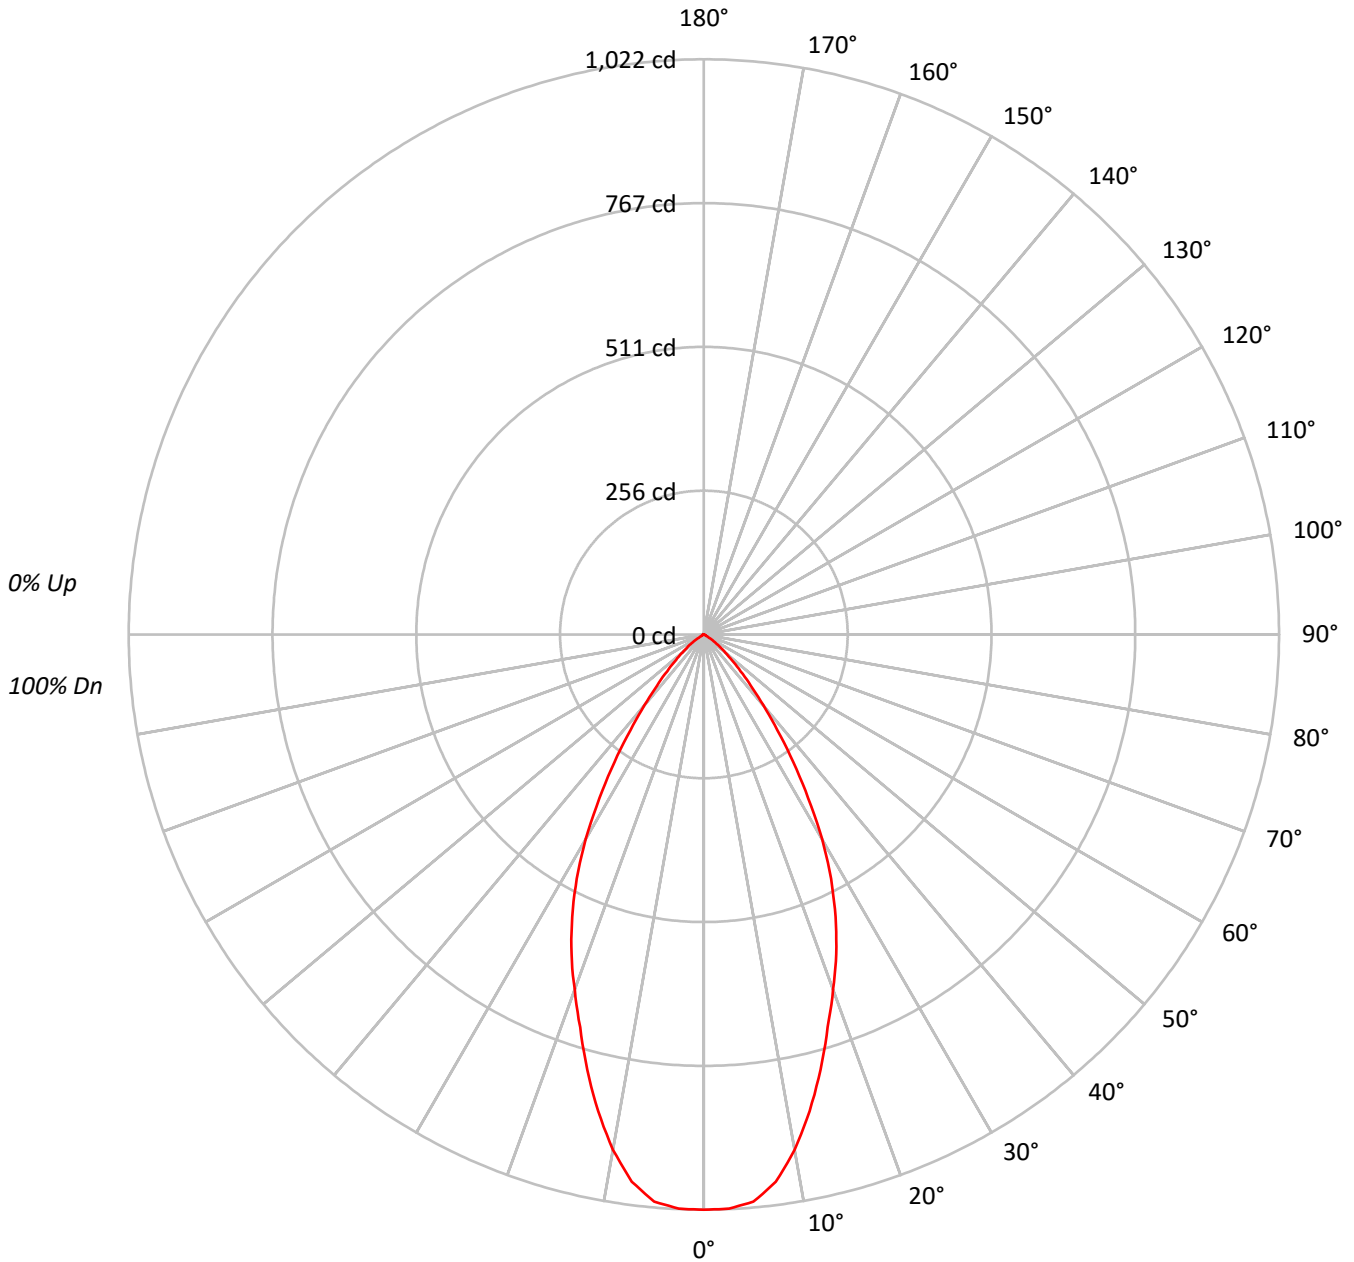



TEST NUMBER: P#

CATALOG NUMBER: LD2B15D010 EU2B15WFL559024 2LBDLC\*MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10		0		
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	110	108	106	111	108	106	104	104	102	101	101	99	98	97	96	95	93			
2	108	102	98	95	105	101	97	94	98	94	92	95	92	90	92	90	88	86			
3	102	95	90	86	100	94	89	85	91	87	84	89	85	83	87	84	81	80			
4	97	89	83	79	95	88	82	78	85	81	77	83	80	76	82	78	76	74			
5	91	83	77	72	90	82	76	72	80	75	71	78	74	71	77	73	70	69			
6	87	78	71	67	85	77	71	67	75	70	66	74	69	66	73	69	65	64			
7	82	73	67	62	81	72	66	62	71	66	62	70	65	62	69	64	61	60			
8	78	69	62	58	77	68	62	58	67	62	58	66	61	58	65	61	57	56			
9	74	65	59	55	73	64	58	54	63	58	54	62	57	54	61	57	54	53			
10	71	61	55	51	70	61	55	51	60	55	51	59	54	51	58	54	51	49			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	395906
5°	393375
10°	365710
15°	321049
20°	276754
25°	236645
30°	187808
35°	130936
40°	82825
45°	50561
50°	29889
55°	16343
60°	3564
65°	3208
70°	2605
75°	3442
80°	2677
85°	5333



TEST NUMBER: P#

CATALOG NUMBER: LD2B15D010 EU2B15WFL559024 2LBDLC\*MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	93.9	11.1
10°-20°	223.0	26.4
20°-30°	251.6	29.8
30°-40°	174.0	20.6
40°-50°	74.2	8.8
50°-60°	21.5	2.5
60°-70°	3.1	0.4
70°-80°	2.0	0.2
80°-90°	0.8	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	568.4	67.3
0°-40°	742.5	88.0
0°-60°	838.1	99.3
0°-90°	844.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	844.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1022	
5°	1012	94
15°	801	223
25°	554	252
35°	277	174
45°	92	74
55°	24	21
65°	4	3
75°	2	2
85°	1	1
90°	0	



TEST NUMBER: P#

CATALOG NUMBER: LD2B15D010 EU2B15WFL559024 2LBDLC\*MW

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1022.1
2.5°	1021.0
5°	1011.7
7.5°	980.6
10°	929.8
12.5°	867.5
15°	800.6
17.5°	731.4
20°	671.4
22.5°	614.9
25°	553.7
27.5°	489.1
30°	419.9
32.5°	344.9
35°	276.9
37.5°	214.6
40°	163.8
42.5°	123.4
45°	92.3
47.5°	66.9
50°	49.6
52.5°	35.8
55°	24.2
57.5°	10.4
60°	4.6
62.5°	3.5
65°	3.5
67.5°	2.3
70°	2.3
72.5°	2.3
75°	2.3
77.5°	1.2
80°	1.2
82.5°	1.2
85°	1.2
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)