

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P264256

Luminaire Tested: **LD2B15D010 EU2B1510SP159027 2LBD\*B**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P264256  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-1805-787-1)  
Test Lab: INNOVATION CENTER(G2)  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LD2B15D010 EU2B1510SP159027 2LBD\*B  
Description: 1500 Lumen, 2inch Portfolio LED Downlight  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1003.0 lumens  
Efficiency: N/A  
Efficacy: 70.1 lumens/watt  
Spacing Criteria (0/90/45): 0.28 / 0.28 / 0.28  
Luminous Opening: Circular (Dia: 0.17' x H: 0')  
CIE Type: Direct


Input Watts (W): 14.3  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P264256

CATALOG NUMBER: LD2B15D010 EU2B1510SP159027 2LBD\*B

### Luminous Intensity Polar Plot

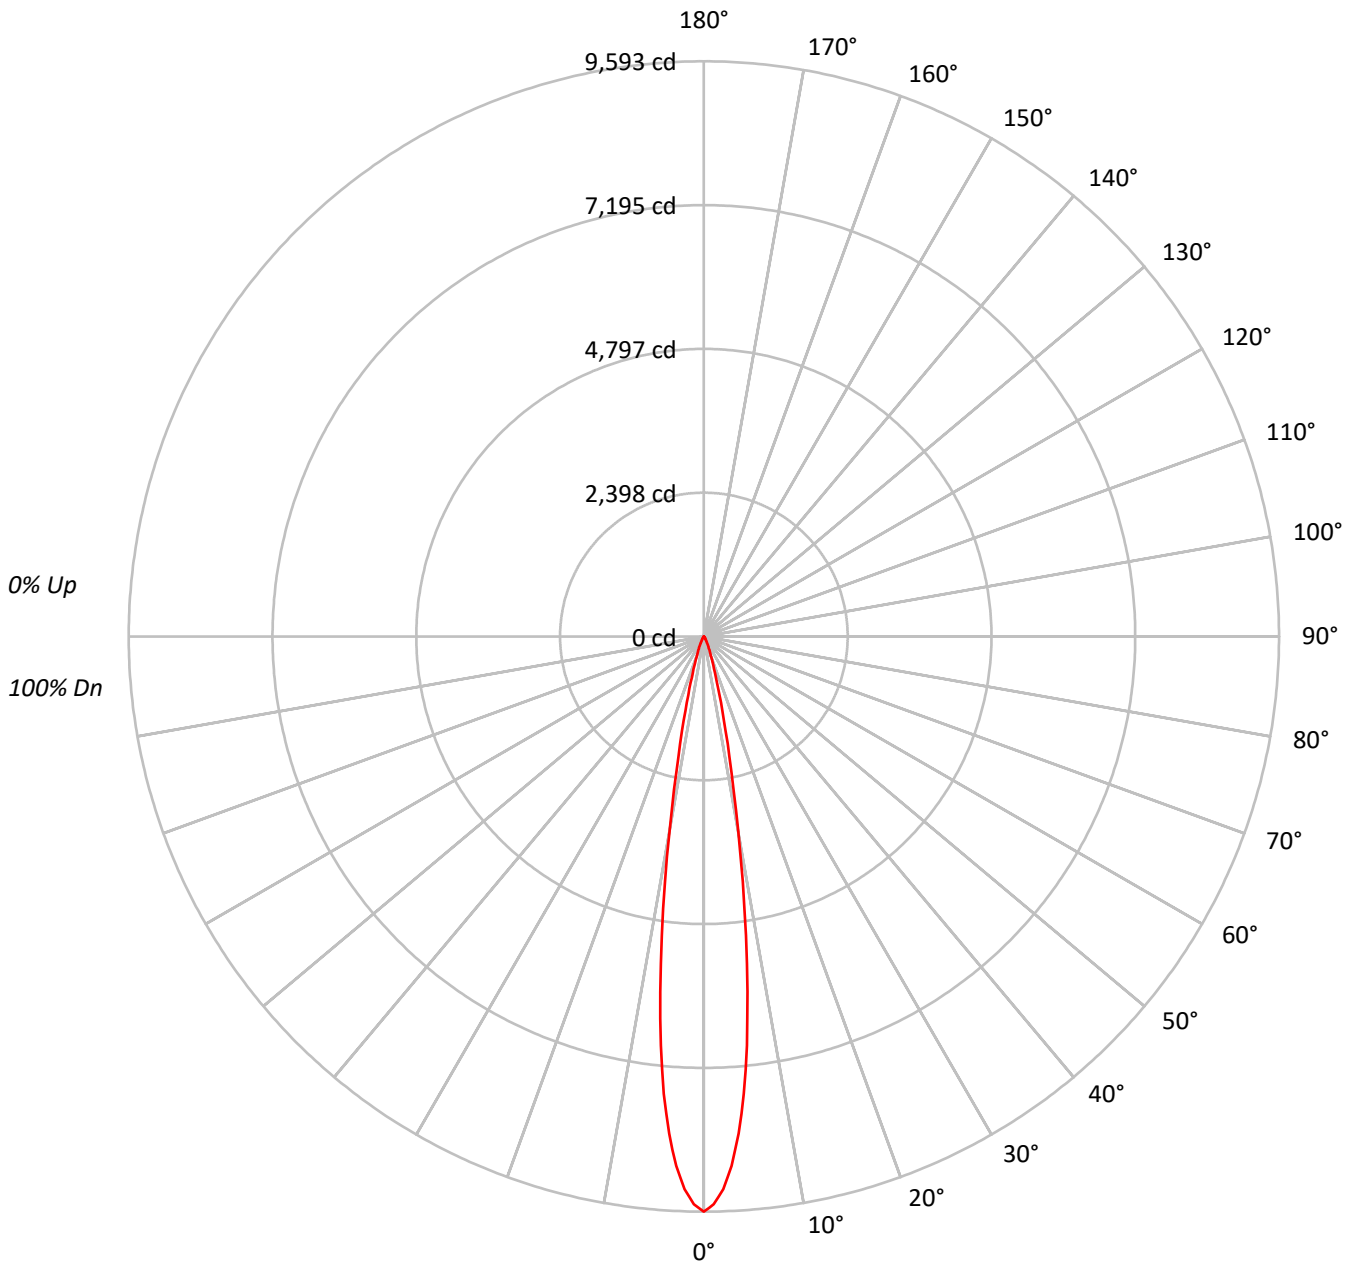



TEST NUMBER: P264256

CATALOG NUMBER: LD2B15D010 EU2B1510SP159027 2LBD\*B

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	116	114	112	111	113	112	110	109	108	107	106	104	103	102	101	100	100	98	98	98	98
2	113	109	107	105	111	108	106	104	105	103	101	102	101	99	99	98	97	96	96	96	96
3	110	106	103	100	108	105	102	100	102	100	98	100	98	97	98	96	95	94	94	94	94
4	107	103	99	97	106	102	99	96	100	97	95	98	96	94	96	95	93	92	92	92	92
5	105	100	97	94	104	99	96	94	98	95	93	96	94	92	95	93	91	90	90	90	90
6	103	98	94	92	102	97	94	91	96	93	91	95	92	90	93	91	90	89	89	89	89
7	101	95	92	90	100	95	92	89	94	91	89	93	90	89	92	90	88	87	87	87	87
8	99	93	90	88	98	93	90	88	92	89	87	91	89	87	91	88	87	86	86	86	86
9	97	92	88	86	96	91	88	86	91	88	86	90	87	86	89	87	85	85	85	85	85
10	95	90	87	85	95	90	87	85	89	86	85	89	86	84	88	86	84	83	83	83	83

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	4732770
5°	3793538
10°	1655715
15°	513115
20°	178876
25°	78987
30°	35776
35°	18611
40°	10627
45°	5024
50°	3147
55°	1806
60°	987
65°	1167
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P264256

CATALOG NUMBER: LD2B15D010 EU2B1510SP159027 2LBD\*B

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	581.7	58.0
10°-20°	318.6	31.8
20°-30°	72.6	7.2
30°-40°	20.9	2.1
40°-50°	6.4	0.6
50°-60°	1.9	0.2
60°-70°	0.9	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	972.9	97.0
0°-40°	993.7	99.1
0°-60°	1002.1	99.9
0°-90°	1003.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1003.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	9593	
5°	7660	582
15°	1005	319
25°	145	73
35°	31	21
45°	7	6
55°	2	2
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P264256

CATALOG NUMBER: LD2B15D010 EU2B1510SP159027 2LBD\*B

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	9592.9
1°	9473.5
2°	9225.4
3°	8840.5
4°	8311.4
5°	7659.9
6°	6861.2
7°	5968.8
8°	5037.3
9°	4135.6
10°	3305.0
11°	2602.0
12°	2048.3
13°	1611.9
14°	1273.2
15°	1004.6
16°	792.5
17°	630.9
18°	507.4
19°	412.7
20°	340.7
22.5°	220.3
25°	145.1
26°	122.5
27°	104.0
28°	87.5
29°	73.1
30°	62.8
32.5°	43.2
35°	30.9
37.5°	22.6
40°	16.5
42.5°	11.3
45°	7.2
47.5°	5.1
50°	4.1
52.5°	3.1
55°	2.1
57.5°	1.0
60°	1.0
62.5°	1.0
65°	1.0
67.5°	1.0



TEST NUMBER: P264256

CATALOG NUMBER: LD2B15D010 EU2B1510SP159027 2LBD\*B

**CANDELA DISTRIBUTION (continued):**

	0°
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







70°		0.0
72.5°		0.0



(END OF REPORT)