

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P225521

Luminaire Tested: **LD2B15D010 EU2B15FL409027 2LBDL*H**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P225521
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14832)
Test Lab: INNOVATION CENTER (G1)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD2B15D010 EU2B15FL409027 2LBDL*H
Description: 1500 Lumen, 2inch Portfolio LED Downlight
FLOOD OPTIC
LENSED SPUN ROUND TRIM WITH HAZE FINISH
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 998.5 lumens
Efficiency: N/A
Efficacy: 69.8 lumens/watt
Spacing Criteria (0/90/45): 0.6 / 0.6 / 0.6
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 14.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P225521

CATALOG NUMBER: LD2B15D010 EU2B15FL409027 2LBDL*H

Luminous Intensity Polar Plot

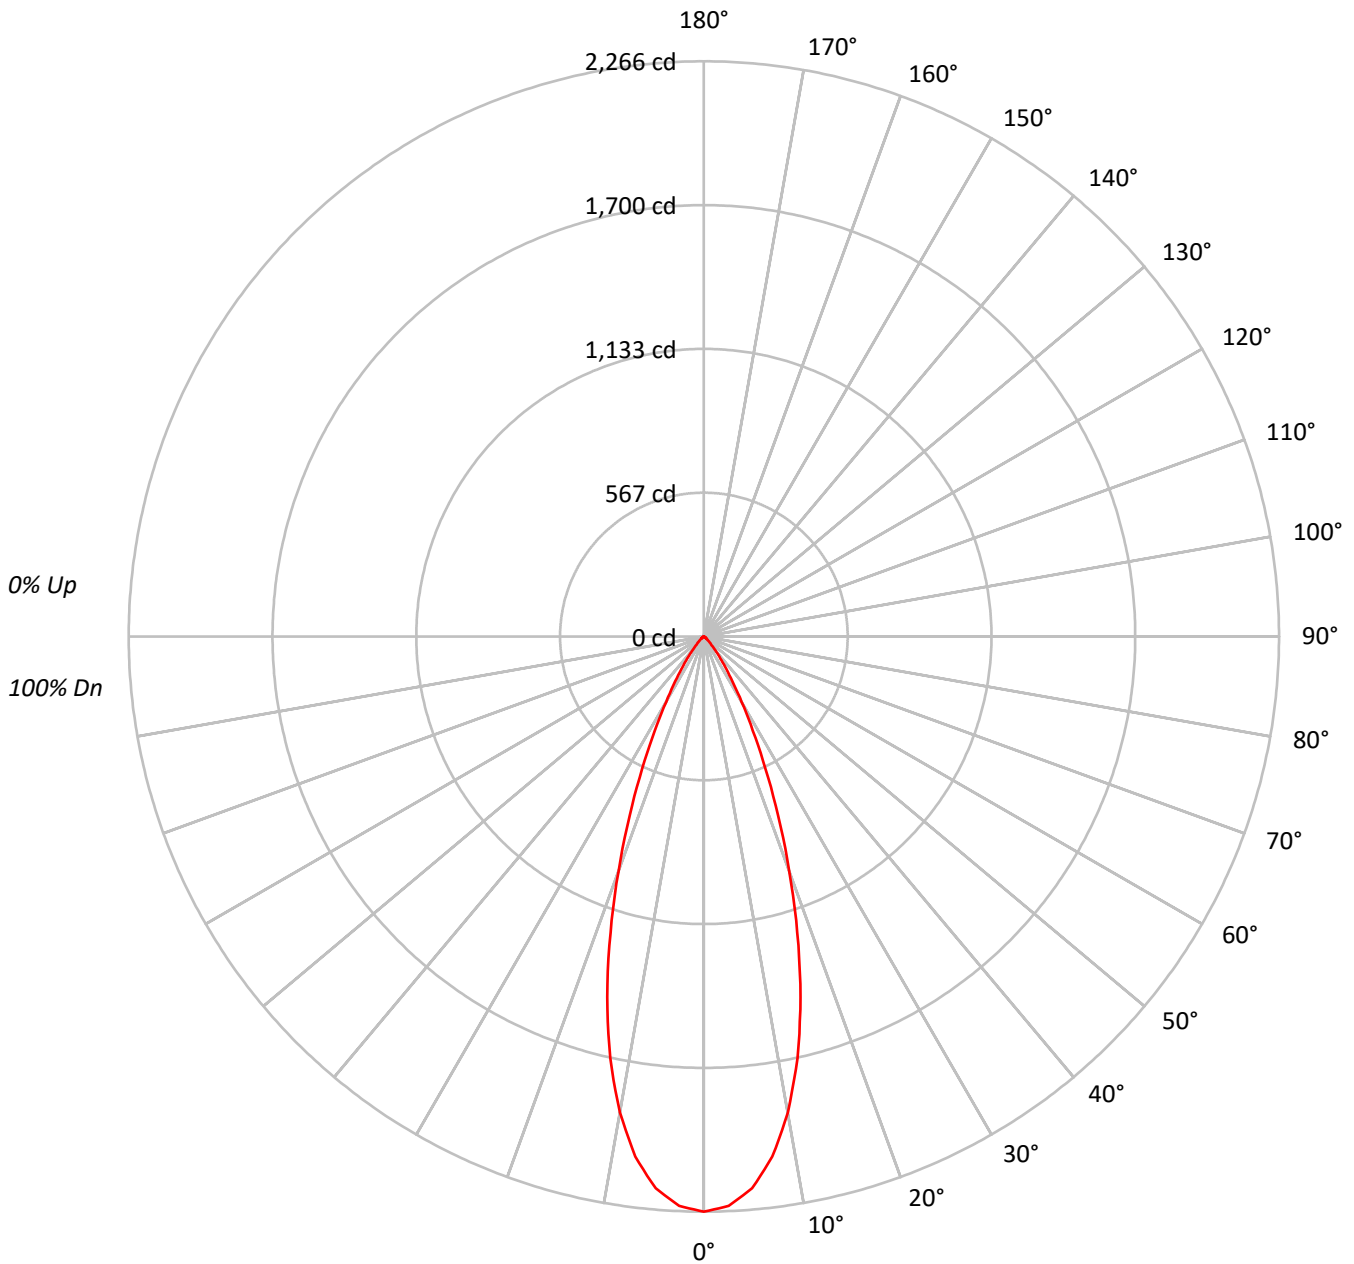



TEST NUMBER: P225521

CATALOG NUMBER: LD2B15D010 EU2B15FL409027 2LBDL*H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

| | | | | | | | | | | | | | | | | | | | | | |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|---|
| RF | 20 | | | | 20 | | | | 20 | | | | 20 | | | | 20 | | | | |
| RC | 80 | | | | 70 | | | | 50 | | | | 30 | | | | 10 | | | 0 | |
| RW | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 0 |
| RCR | | | | | | | | | | | | | | | | | | | | | |
| 0 | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 | | | |
| 1 | 114 | 112 | 110 | 108 | 112 | 110 | 108 | 106 | 106 | 104 | 103 | 102 | 101 | 100 | 99 | 98 | 97 | 95 | | | |
| 2 | 110 | 105 | 102 | 99 | 108 | 104 | 101 | 98 | 101 | 98 | 96 | 98 | 96 | 94 | 95 | 93 | 92 | 90 | | | |
| 3 | 105 | 100 | 96 | 92 | 103 | 98 | 95 | 91 | 96 | 93 | 90 | 94 | 91 | 89 | 91 | 89 | 87 | 86 | | | |
| 4 | 101 | 95 | 90 | 86 | 99 | 94 | 89 | 86 | 91 | 88 | 85 | 90 | 86 | 84 | 88 | 85 | 83 | 82 | | | |
| 5 | 97 | 90 | 85 | 81 | 96 | 89 | 84 | 81 | 87 | 83 | 80 | 86 | 82 | 80 | 84 | 81 | 79 | 78 | | | |
| 6 | 93 | 86 | 81 | 77 | 92 | 85 | 80 | 77 | 84 | 79 | 76 | 82 | 79 | 76 | 81 | 78 | 75 | 74 | | | |
| 7 | 90 | 82 | 77 | 73 | 88 | 81 | 76 | 73 | 80 | 76 | 73 | 79 | 75 | 72 | 78 | 75 | 72 | 71 | | | |
| 8 | 86 | 78 | 73 | 70 | 85 | 78 | 73 | 70 | 77 | 72 | 69 | 76 | 72 | 69 | 75 | 71 | 69 | 68 | | | |
| 9 | 83 | 75 | 70 | 67 | 82 | 75 | 70 | 67 | 74 | 69 | 66 | 73 | 69 | 66 | 72 | 69 | 66 | 65 | | | |
| 10 | 80 | 72 | 67 | 64 | 79 | 72 | 67 | 64 | 71 | 67 | 64 | 70 | 66 | 64 | 70 | 66 | 63 | 62 | | | |

AVERAGE LUMINANCE (cd/sqm):

| | |
|-----|--------|
| | 0° |
| 0° | 877726 |
| 5° | 848495 |
| 10° | 748648 |
| 15° | 589806 |
| 20° | 405321 |
| 25° | 244766 |
| 30° | 132660 |
| 35° | 68187 |
| 40° | 33322 |
| 45° | 15776 |
| 50° | 8256 |
| 55° | 5538 |
| 60° | 3176 |
| 65° | 1283 |
| 70° | 0 |
| 75° | 0 |
| 80° | 0 |
| 85° | 0 |



TEST NUMBER: P225521

CATALOG NUMBER: LD2B15D010 EU2B15FL409027 2LBDL*H

ZONAL LUMENS:

| Zone | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10° | 199.4 | 20.0 |
| 10°-20° | 400.4 | 40.1 |
| 20°-30° | 267.5 | 26.8 |
| 30°-40° | 96.9 | 9.7 |
| 40°-50° | 25.0 | 2.5 |
| 50°-60° | 7.4 | 0.7 |
| 60°-70° | 1.9 | 0.2 |
| 70°-80° | 0.0 | 0.0 |
| 80°-90° | 0.0 | 0.0 |
| 90°-100° | 0.0 | 0.0 |
| 100°-110° | 0.0 | 0.0 |
| 110°-120° | 0.0 | 0.0 |
| 120°-130° | 0.0 | 0.0 |
| 130°-140° | 0.0 | 0.0 |
| 140°-150° | 0.0 | 0.0 |
| 150°-160° | 0.0 | 0.0 |
| 160°-170° | 0.0 | 0.0 |
| 170°-180° | 0.0 | 0.0 |
| 0°-30° | 867.3 | 86.9 |
| 0°-40° | 964.2 | 96.6 |
| 0°-60° | 996.6 | 99.8 |
| 0°-90° | 998.5 | 100.0 |
| 90°-120° | 0.0 | 0.0 |
| 90°-150° | 0.0 | 0.0 |
| 90°-180° | 0.0 | 0.0 |
| 0°-180° | 998.5 | 100.0 |

CANDELA DISTRIBUTION:

| | 0° | Flux |
|-----|------|------|
| 0° | 2266 | |
| 5° | 2182 | 199 |
| 15° | 1471 | 400 |
| 25° | 573 | 268 |
| 35° | 144 | 97 |
| 45° | 29 | 25 |
| 55° | 8 | 7 |
| 65° | 1 | 2 |
| 75° | 0 | 0 |
| 85° | 0 | 0 |
| 90° | 0 | |



TEST NUMBER: P225521

CATALOG NUMBER: LD2B15D010 EU2B15FL409027 2LBDL*H

CANDELA DISTRIBUTION (FULL):

| 0° | |
|-------|--------|
| 0° | 2266.0 |
| 2.5° | 2245.4 |
| 5° | 2182.2 |
| 7.5° | 2066.9 |
| 10° | 1903.4 |
| 12.5° | 1702.9 |
| 15° | 1470.8 |
| 17.5° | 1223.6 |
| 20° | 983.3 |
| 22.5° | 762.2 |
| 25° | 572.7 |
| 27.5° | 417.5 |
| 30° | 296.6 |
| 32.5° | 208.7 |
| 35° | 144.2 |
| 37.5° | 100.3 |
| 40° | 65.9 |
| 42.5° | 42.6 |
| 45° | 28.8 |
| 47.5° | 20.6 |
| 50° | 13.7 |
| 52.5° | 11.0 |
| 55° | 8.2 |
| 57.5° | 5.5 |
| 60° | 4.1 |
| 62.5° | 2.7 |
| 65° | 1.4 |
| 67.5° | 1.4 |
| 70° | 0.0 |
| 72.5° | 0.0 |
| 75° | 0.0 |
| 77.5° | 0.0 |
| 80° | 0.0 |
| 82.5° | 0.0 |
| 85° | 0.0 |
| 87.5° | 0.0 |
| 90° | 0.0 |



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)