

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P#

Luminaire Tested: **LD2B15D010 EU2B15WFL559727 2LBDSQLC*MW**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P#
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14810)
Test Lab: INNOVATION CENTER (G1)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD2B15D010 EU2B15WFL559727 2LBDSQLC*MW
Description: 1500 Lumen, 2inch Portfolio LED Downlight
WIDE FLOOD OPTIC
LENSED SQUARE CAST TRIM WITH MATTE WHITE FINISH
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 802.7 lumens
Efficiency: N/A
Efficacy: 56.1 lumens/watt
Spacing Criteria (0/90/45): 0.79 / 0.79 / 0.84
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')
CIE Type: Direct

Input Watts (W): 14.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P#
CATALOG NUMBER: LD2B15D010 EU2B15WFL559727 2LBDSQLC*MW

Luminous Intensity Polar Plot

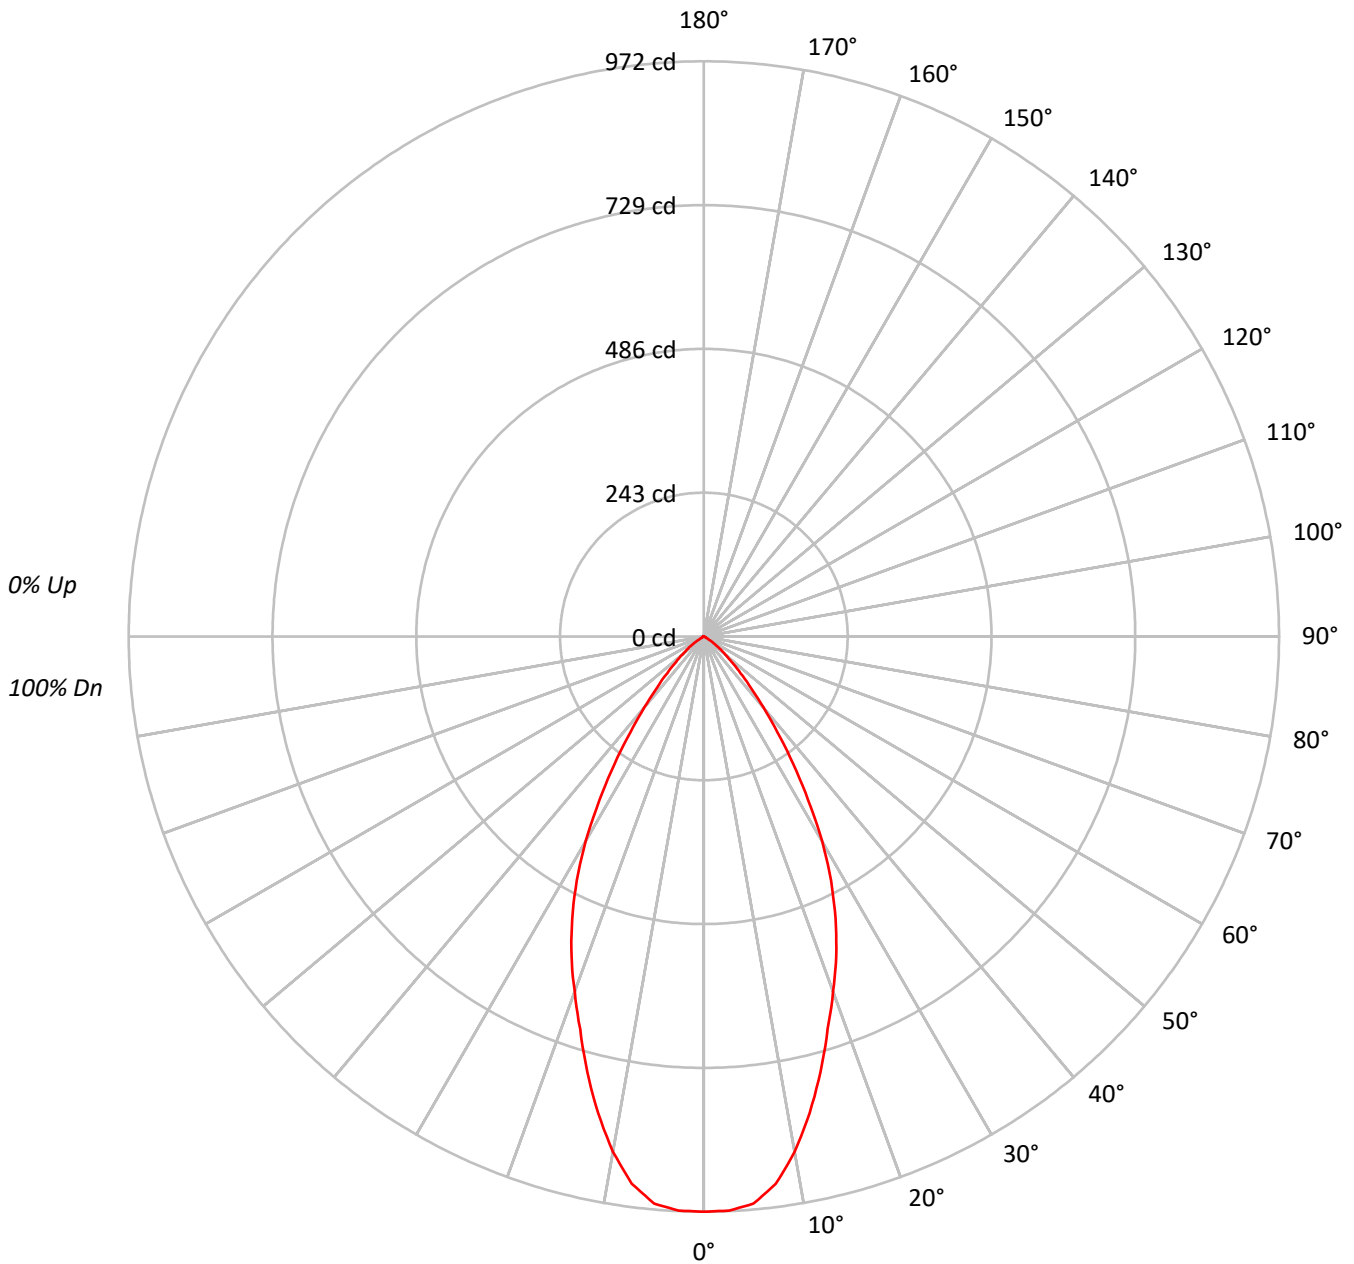



TEST NUMBER: P#

CATALOG NUMBER: LD2B15D010 EU2B15WFL559727 2LBDSQLC*MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	110	108	106	111	108	106	104	104	102	101	101	99	98	97	96	95	93			
2	108	102	98	95	105	101	97	94	98	94	92	95	92	90	92	90	88	86			
3	102	95	90	86	100	94	89	85	91	87	84	89	85	83	87	84	81	80			
4	97	89	83	79	95	88	82	78	85	81	77	83	80	76	82	78	76	74			
5	91	83	77	72	90	82	76	72	80	75	71	78	74	71	77	73	70	69			
6	87	78	71	67	85	77	71	67	75	70	66	74	69	66	73	69	65	64			
7	82	73	67	62	81	72	66	62	71	66	62	70	65	62	69	64	61	60			
8	78	69	62	58	77	68	62	58	67	62	58	66	61	58	65	61	57	56			
9	74	65	59	55	73	64	58	54	63	58	54	62	57	54	61	57	54	53			
10	71	61	55	51	70	61	55	51	60	55	51	59	54	51	58	54	51	49			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	376539
5°	374128
10°	347814
15°	305329
20°	263234
25°	225063
30°	178639
35°	124505
40°	78779
45°	48096
50°	28443
55°	15532
60°	3409
65°	3025
70°	2492
75°	3292
80°	2454
85°	4889



TEST NUMBER: P#

CATALOG NUMBER: LD2B15D010 EU2B15WFL559727 2LBDSQLC*MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	89.3	11.1
10°-20°	212.1	26.4
20°-30°	239.3	29.8
30°-40°	165.5	20.6
40°-50°	70.5	8.8
50°-60°	20.4	2.5
60°-70°	3.0	0.4
70°-80°	1.9	0.2
80°-90°	0.7	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	540.6	67.3
0°-40°	706.1	88.0
0°-60°	797.1	99.3
0°-90°	802.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	802.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	972	
5°	962	89
15°	761	212
25°	527	239
35°	263	166
45°	88	71
55°	23	20
65°	3	3
75°	2	2
85°	1	1
90°	0	



TEST NUMBER: P#

CATALOG NUMBER: LD2B15D010 EU2B15WFL559727 2LBDSQLC*MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	972.1
2.5°	971.0
5°	962.2
7.5°	932.6
10°	884.3
12.5°	825.1
15°	761.4
17.5°	695.6
20°	638.6
22.5°	584.8
25°	526.6
27.5°	465.2
30°	399.4
32.5°	328.1
35°	263.3
37.5°	204.1
40°	155.8
42.5°	117.4
45°	87.8
47.5°	63.6
50°	47.2
52.5°	34.0
55°	23.0
57.5°	9.9
60°	4.4
62.5°	3.3
65°	3.3
67.5°	2.2
70°	2.2
72.5°	2.2
75°	2.2
77.5°	1.1
80°	1.1
82.5°	1.1
85°	1.1
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)