

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P#

Luminaire Tested: **LD2B15D010 EU2B15WFL558030 2LBDSQC*MW**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P#
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14810)
Test Lab: INNOVATION CENTER (G1)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD2B15D010 EU2B15WFL558030 2LBDSQC*MW
Description: 1500 Lumen, 2inch Portfolio LED Downlight
WIDE FLOOD OPTIC
SQUARE CAST TRIM WITH MATTE WHITE FINISH
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1257.1 lumens
Efficiency: N/A
Efficacy: 87.9 lumens/watt
Spacing Criteria (0/90/45): 0.79 / 0.79 / 0.84
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 14.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P#

CATALOG NUMBER: LD2B15D010 EU2B15WFL558030 2LBDSQC*MW

Luminous Intensity Polar Plot

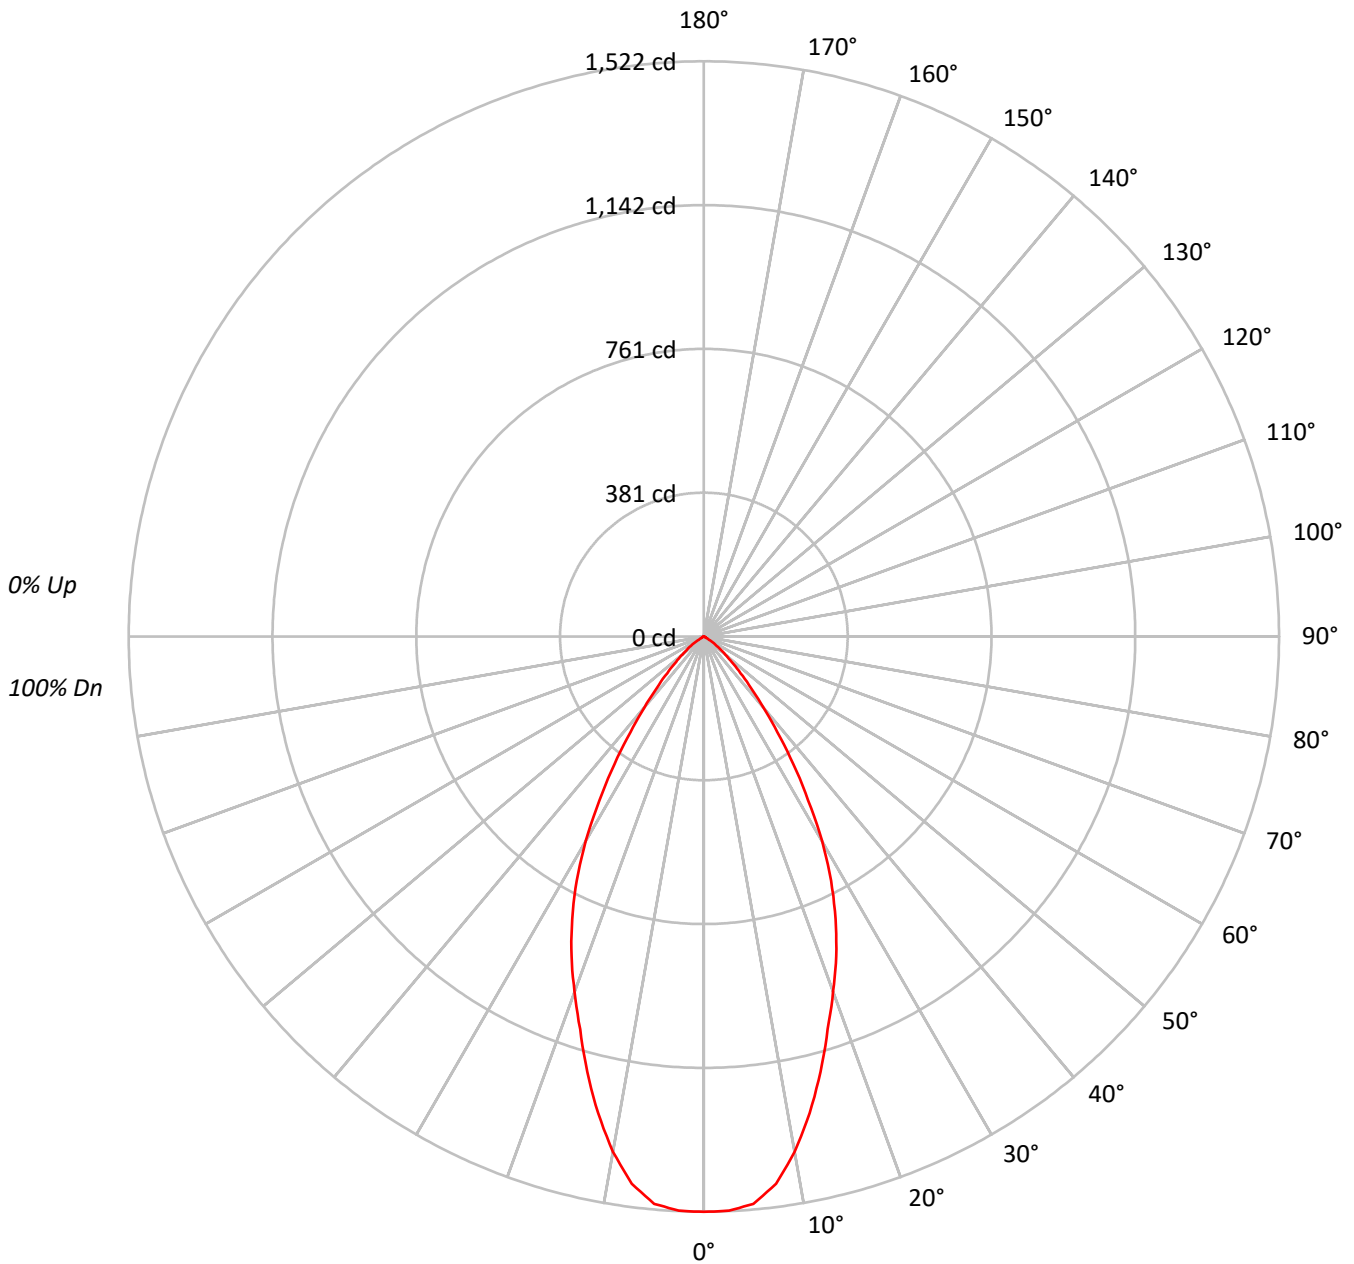



TEST NUMBER: P#

CATALOG NUMBER: LD2B15D010 EU2B15WFL558030 2LBDSQC*MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	110	108	106	111	108	106	104	104	102	101	101	99	98	97	96	95	93			
2	108	102	98	95	105	101	97	94	98	94	92	95	92	90	92	90	88	86			
3	102	95	90	86	100	94	89	85	91	87	84	89	85	83	87	84	81	80			
4	97	89	83	79	95	88	82	78	85	81	77	83	80	76	82	78	76	74			
5	91	83	77	72	90	82	76	72	80	75	71	78	74	71	77	73	70	69			
6	87	78	71	67	85	77	71	67	75	70	66	74	69	66	73	69	65	64			
7	82	73	67	62	81	72	66	62	71	66	62	70	65	62	69	64	61	60			
8	78	69	62	58	77	68	62	58	67	62	58	66	61	58	65	61	57	56			
9	74	65	59	55	73	64	58	54	63	58	54	62	57	54	61	57	54	53			
10	71	61	55	51	70	61	55	51	60	55	51	59	54	51	58	54	51	49			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	589696
5°	585921
10°	544711
15°	478205
20°	412205
25°	352510
30°	279767
35°	195008
40°	123377
45°	75321
50°	44532
55°	24379
60°	5345
65°	4766
70°	3851
75°	5088
80°	3792
85°	7555



TEST NUMBER: P#

CATALOG NUMBER: LD2B15D010 EU2B15WFL558030 2LBDSQC*MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	139.8	11.1
10°-20°	332.1	26.4
20°-30°	374.7	29.8
30°-40°	259.2	20.6
40°-50°	110.5	8.8
50°-60°	32.0	2.5
60°-70°	4.7	0.4
70°-80°	2.9	0.2
80°-90°	1.2	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	846.7	67.3
0°-40°	1105.9	88.0
0°-60°	1248.4	99.3
0°-90°	1257.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1257.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1522	
5°	1507	140
15°	1192	332
25°	825	375
35°	412	259
45°	138	111
55°	36	32
65°	5	5
75°	3	3
85°	2	1
90°	0	



TEST NUMBER: P#

CATALOG NUMBER: LD2B15D010 EU2B15WFL558030 2LBDSQC*MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	1522.4
2.5°	1520.7
5°	1506.9
7.5°	1460.5
10°	1384.9
12.5°	1292.1
15°	1192.5
17.5°	1089.4
20°	1000.0
22.5°	915.8
25°	824.8
27.5°	728.5
30°	625.5
32.5°	513.8
35°	412.4
37.5°	319.6
40°	244.0
42.5°	183.9
45°	137.5
47.5°	99.7
50°	73.9
52.5°	53.3
55°	36.1
57.5°	15.5
60°	6.9
62.5°	5.2
65°	5.2
67.5°	3.4
70°	3.4
72.5°	3.4
75°	3.4
77.5°	1.7
80°	1.7
82.5°	1.7
85°	1.7
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)