

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P224920

Luminaire Tested: **LD2B15D010 EU2B15FL409030 2LBD*H**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P224920
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (156)
Test Lab: INNOVATION CENTER-P2
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD2B15D010 EU2B15FL409030 2LBD*H
Description: 1500 Lumen, 2inch Portfolio LED Downlight
FLOOD OPTIC
SPUN ROUND TRIM WITH HAZE FINISH
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1109.8 lumens
Efficiency: N/A
Efficacy: 77.6 lumens/watt
Spacing Criteria (0/90/45): 0.6 / 0.6 / 0.59
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 14.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P224920

CATALOG NUMBER: LD2B15D010 EU2B15FL409030 2LBD*H

Luminous Intensity Polar Plot

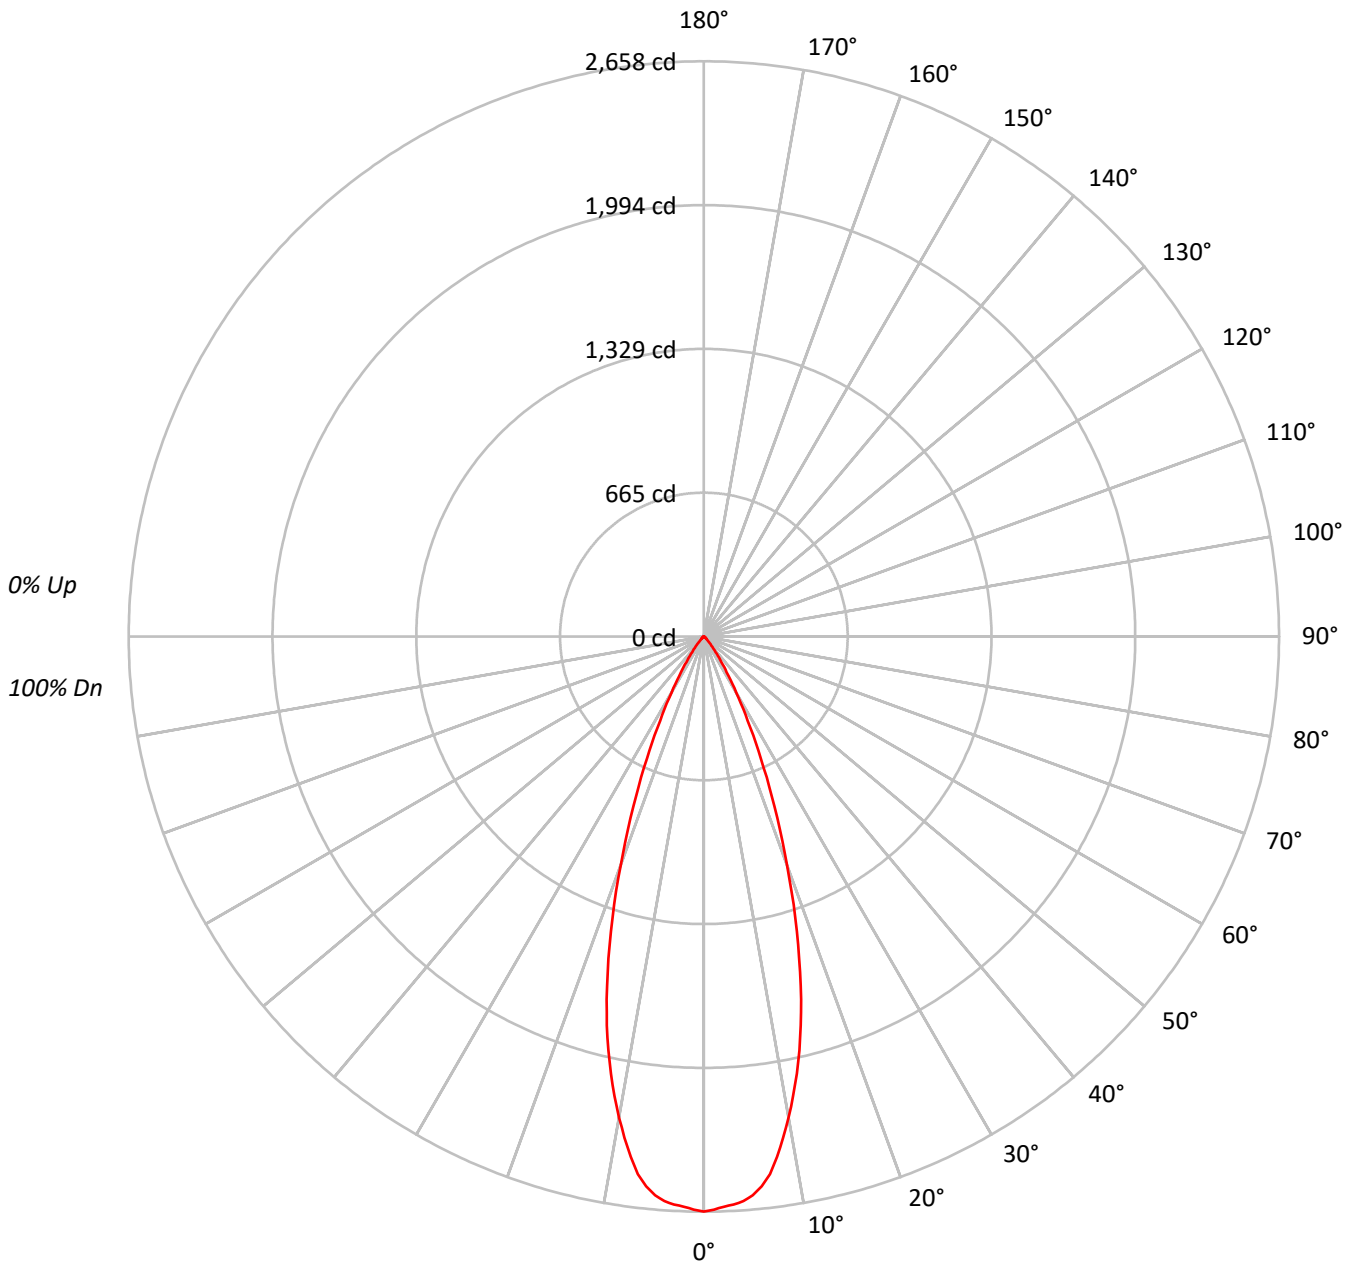



TEST NUMBER: P224920

CATALOG NUMBER: LD2B15D010 EU2B15FL409030 2LBD*H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95	95	95	95
2	110	106	103	100	108	104	101	99	101	99	97	98	96	94	96	94	93	91	91	91	91
3	106	100	96	93	104	99	95	92	97	94	91	94	92	90	92	90	88	87	87	87	87
4	102	96	91	88	100	94	90	87	92	89	86	91	88	85	89	86	84	83	83	83	83
5	98	91	86	83	96	90	86	82	89	85	82	87	84	81	86	83	80	79	79	79	79
6	94	87	82	79	93	86	82	78	85	81	78	84	80	77	82	79	77	76	76	76	76
7	91	83	78	75	90	83	78	75	82	77	74	80	77	74	79	76	74	73	73	73	73
8	88	80	75	72	87	79	75	72	78	74	71	77	74	71	77	73	71	70	70	70	70
9	85	77	72	69	84	76	72	69	75	71	68	75	71	68	74	70	68	67	67	67	67
10	82	74	69	66	81	73	69	66	73	69	66	72	68	66	71	68	65	64	64	64	64

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1029372
5°	1007836
10°	887608
15°	696394
20°	462453
25°	265451
30°	133152
35°	61472
40°	24979
45°	11175
50°	5845
55°	3647
60°	1627
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P224920

CATALOG NUMBER: LD2B15D010 EU2B15FL409030 2LBD*H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	236.7	21.3
10°-20°	470.0	42.4
20°-30°	292.0	26.3
30°-40°	88.1	7.9
40°-50°	18.0	1.6
50°-60°	4.6	0.4
60°-70°	0.3	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	998.8	90.0
0°-40°	1086.9	97.9
0°-60°	1109.5	100.0
0°-90°	1109.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1109.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2658	
5°	2592	237
15°	1737	470
25°	621	292
35°	130	88
45°	20	18
55°	5	5
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P224920

CATALOG NUMBER: LD2B15D010 EU2B15FL409030 2LBD*H

CANDELA DISTRIBUTION (FULL):

	0°
0°	2657.5
1°	2648.9
2°	2637.1
3°	2628.5
4°	2615.6
5°	2592.0
6°	2554.4
7°	2502.8
8°	2428.6
9°	2344.8
10°	2256.7
11°	2163.2
12°	2065.4
13°	1963.3
14°	1851.6
15°	1736.6
17.5°	1428.2
20°	1121.9
22.5°	851.1
25°	621.1
27.5°	438.4
30°	297.7
32.5°	195.6
35°	130.0
37.5°	80.6
40°	49.4
42.5°	32.2
45°	20.4
47.5°	12.9
50°	9.7
52.5°	6.4
55°	5.4
57.5°	3.2
60°	2.1
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0



TEST NUMBER: P224920

CATALOG NUMBER: LD2B15D010 EU2B15FL409030 2LBD*H

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







85°		0.0
87.5°		0.0



(END OF REPORT)