

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P264565

Luminaire Tested: **LD2B15D010 EU2B1510SP159730 2LBD\*GPH**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P264565  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-1805-787-1)  
Test Lab: INNOVATION CENTER(G2)  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LD2B15D010 EU2B1510SP159730 2LBD\*GPH  
Description: 1500 Lumen, 2inch Portfolio LED Downlight  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 915.9 lumens  
Efficiency: N/A  
Efficacy: 64.1 lumens/watt  
Spacing Criteria (0/90/45): 0.28 / 0.28 / 0.28  
Luminous Opening: Circular (Dia: 0.17' x H: 0')  
CIE Type: Direct


Input Watts (W): 14.3  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P264565

CATALOG NUMBER: LD2B15D010 EU2B1510SP159730 2LBD\*GPH

### Luminous Intensity Polar Plot

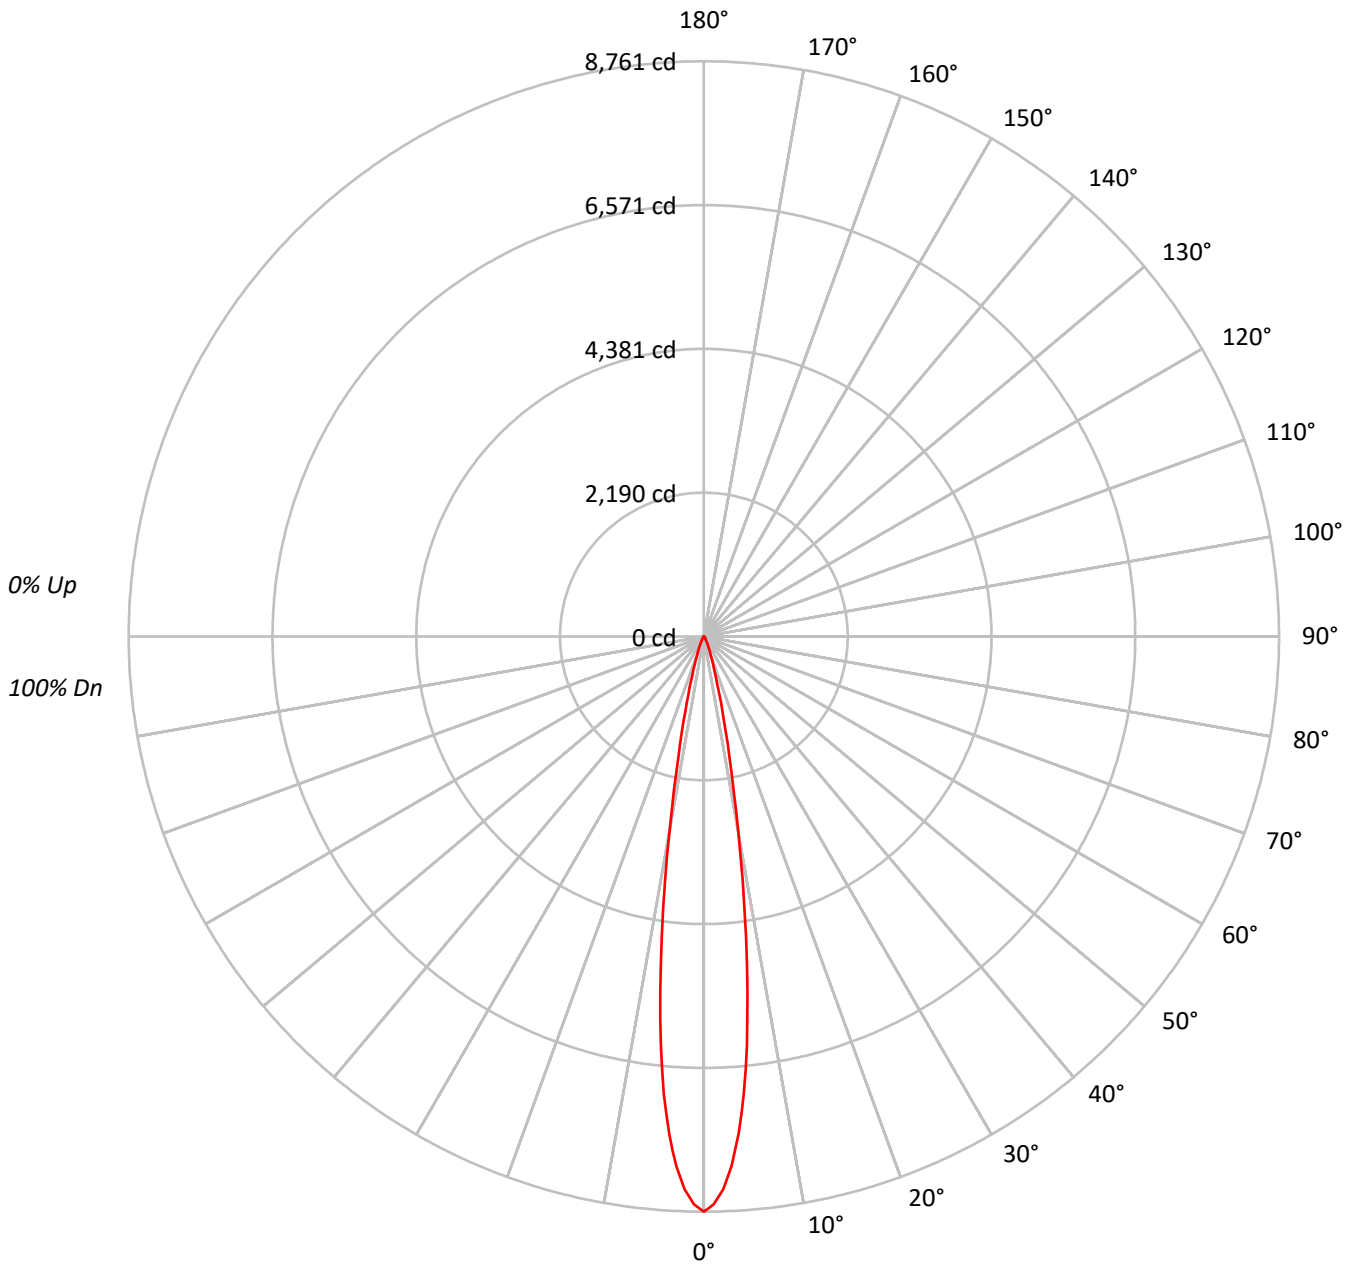



TEST NUMBER: P264565

CATALOG NUMBER: LD2B15D010 EU2B1510SP159730 2LBD\*GPH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100						100													
1	116	114	112	111	113	112	110	109	108	107	106	104	103	102	101	100	100	98						98													
2	113	109	107	105	111	108	106	104	105	103	101	102	101	99	99	98	97	96						96													
3	110	106	103	100	108	105	102	100	102	100	98	100	98	97	98	96	95	94						94													
4	107	103	99	97	106	102	99	96	100	97	95	98	96	94	96	95	93	92						92													
5	105	100	97	94	104	99	96	94	98	95	93	96	94	92	95	93	91	90						90													
6	103	98	94	92	102	97	94	91	96	93	91	95	92	90	93	91	90	89						89													
7	101	95	92	90	100	95	92	89	94	91	89	93	90	89	92	90	88	87						87													
8	99	93	90	88	98	93	90	88	92	89	87	91	89	87	91	88	87	86						86													
9	97	92	88	86	96	91	88	86	91	88	86	90	87	86	89	87	85	85						85													
10	95	90	87	85	95	90	87	85	89	86	85	89	86	84	88	86	84	83						83													

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	4322244
5°	3464496
10°	1512086
15°	468576
20°	163335
25°	72128
30°	32643
35°	16984
40°	9661
45°	4605
50°	2917
55°	1634
60°	888
65°	1051
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P264565

CATALOG NUMBER: LD2B15D010 EU2B1510SP159730 2LBD\*GPH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	531.2	58.0
10°-20°	290.9	31.8
20°-30°	66.3	7.2
30°-40°	19.1	2.1
40°-50°	5.9	0.6
50°-60°	1.8	0.2
60°-70°	0.8	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	888.5	97.0
0°-40°	907.5	99.1
0°-60°	915.2	99.9
0°-90°	915.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	915.9	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	8761	
5°	6996	531
15°	917	291
25°	132	66
35°	28	19
45°	7	6
55°	2	2
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P264565

CATALOG NUMBER: LD2B15D010 EU2B1510SP159730 2LBD\*GPH

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	8760.8
1°	8651.8
2°	8425.2
3°	8073.7
4°	7590.5
5°	6995.5
6°	6266.0
7°	5451.1
8°	4600.4
9°	3776.9
10°	3018.3
11°	2376.3
12°	1870.6
13°	1472.0
14°	1162.8
15°	917.4
16°	723.8
17°	576.2
18°	463.4
19°	376.9
20°	311.1
22.5°	201.2
25°	132.5
26°	111.9
27°	94.9
28°	79.9
29°	66.7
30°	57.3
32.5°	39.5
35°	28.2
37.5°	20.7
40°	15.0
42.5°	10.3
45°	6.6
47.5°	4.7
50°	3.8
52.5°	2.8
55°	1.9
57.5°	0.9
60°	0.9
62.5°	0.9
65°	0.9
67.5°	0.9



TEST NUMBER: P264565

CATALOG NUMBER: LD2B15D010 EU2B1510SP159730 2LBD\*GPH

**CANDELA DISTRIBUTION (continued):**

	0°
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







70°		0.0
72.5°		0.0



(END OF REPORT)