

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P224431

Luminaire Tested: **LD2B15D010 EU2B15FL408035 2LBDSQC*MW**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P224431
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14831)
Test Lab: INNOVATION CENTER (G1)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD2B15D010 EU2B15FL408035 2LBDSQC*MW
Description: 1500 Lumen, 2inch Portfolio LED Downlight
FLOOD OPTIC
SQUARE CAST TRIM WITH MATTE WHITE FINISH
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1392.2 lumens
Efficiency: N/A
Efficacy: 97.4 lumens/watt
Spacing Criteria (0/90/45): 0.61 / 0.61 / 0.59
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 14.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P224431

CATALOG NUMBER: LD2B15D010 EU2B15FL408035 2LBDSQC*MW

Luminous Intensity Polar Plot

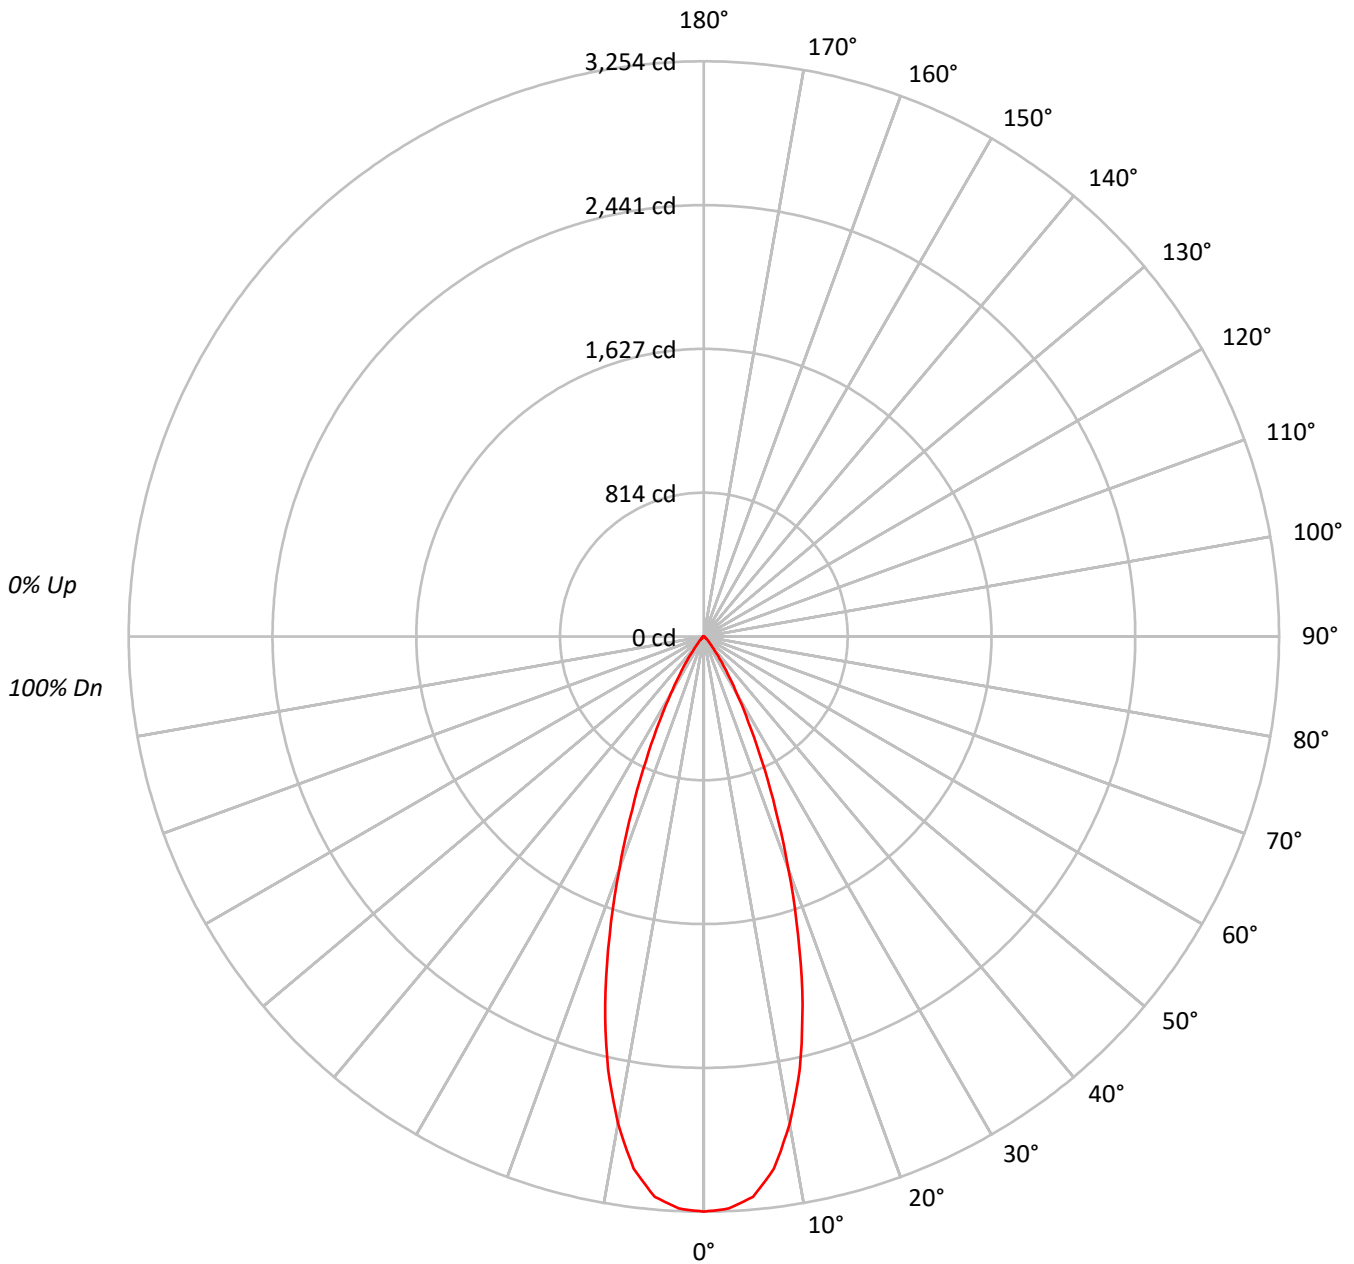

0% Up
100% Dn



TEST NUMBER: P224431

CATALOG NUMBER: LD2B15D010 EU2B15FL408035 2LBDSQC*MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95			
2	110	106	102	99	108	104	101	98	101	98	96	98	96	94	95	94	92	91			
3	105	100	96	93	104	99	95	92	96	93	90	94	91	89	92	90	88	86			
4	101	95	90	87	100	94	90	86	92	88	85	90	87	85	88	86	84	82			
5	98	91	86	82	96	90	85	82	88	84	81	86	83	80	85	82	80	79			
6	94	86	82	78	93	86	81	78	84	80	77	83	79	77	82	79	76	75			
7	90	83	78	74	89	82	77	74	81	77	74	80	76	73	79	76	73	72			
8	87	79	74	71	86	79	74	71	78	74	71	77	73	70	76	73	70	69			
9	84	76	71	68	83	76	71	68	75	71	68	74	70	67	73	70	67	66			
10	81	73	68	65	80	73	68	65	72	68	65	71	68	65	71	67	65	64			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1260385
5°	1237399
10°	1100002
15°	865099
20°	575685
25°	330500
30°	166921
35°	78542
40°	31603
45°	15667
50°	8617
55°	6010
60°	5500
65°	3300
70°	4077
75°	2694
80°	4015
85°	0



TEST NUMBER: P224431

CATALOG NUMBER: LD2B15D010 EU2B15FL408035 2LBDSQC*MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	291.5	20.9
10°-20°	584.4	42.0
20°-30°	363.6	26.1
30°-40°	111.8	8.0
40°-50°	24.6	1.8
50°-60°	8.7	0.6
60°-70°	4.4	0.3
70°-80°	2.6	0.2
80°-90°	0.7	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1239.4	89.0
0°-40°	1351.2	97.1
0°-60°	1384.5	99.4
0°-90°	1392.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1392.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3254	
5°	3182	291
15°	2157	584
25°	773	364
35°	166	112
45°	29	25
55°	9	9
65°	4	4
75°	2	3
85°	0	1
90°	0	



TEST NUMBER: P224431

CATALOG NUMBER: LD2B15D010 EU2B15FL408035 2LBDSQC*MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	3253.9
2.5°	3239.6
5°	3182.4
7.5°	3037.8
10°	2796.7
12.5°	2507.4
15°	2157.3
17.5°	1775.2
20°	1396.6
22.5°	1059.0
25°	773.3
27.5°	544.7
30°	373.2
32.5°	251.8
35°	166.1
37.5°	100.0
40°	62.5
42.5°	42.9
45°	28.6
47.5°	19.6
50°	14.3
52.5°	12.5
55°	8.9
57.5°	7.1
60°	7.1
62.5°	5.4
65°	3.6
67.5°	3.6
70°	3.6
72.5°	3.6
75°	1.8
77.5°	1.8
80°	1.8
82.5°	1.8
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)