

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P224405

Luminaire Tested: **LD2B15D010 EU2B15FL409035 2LBDSQC*MW**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P224405
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14831)
Test Lab: INNOVATION CENTER (G1)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD2B15D010 EU2B15FL409035 2LBDSQC*MW
Description: 1500 Lumen, 2inch Portfolio LED Downlight
FLOOD OPTIC
SQUARE CAST TRIM WITH MATTE WHITE FINISH
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1153.0 lumens
Efficiency: N/A
Efficacy: 80.6 lumens/watt
Spacing Criteria (0/90/45): 0.61 / 0.61 / 0.59
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 14.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P224405

CATALOG NUMBER: LD2B15D010 EU2B15FL409035 2LBDSQC*MW

Luminous Intensity Polar Plot

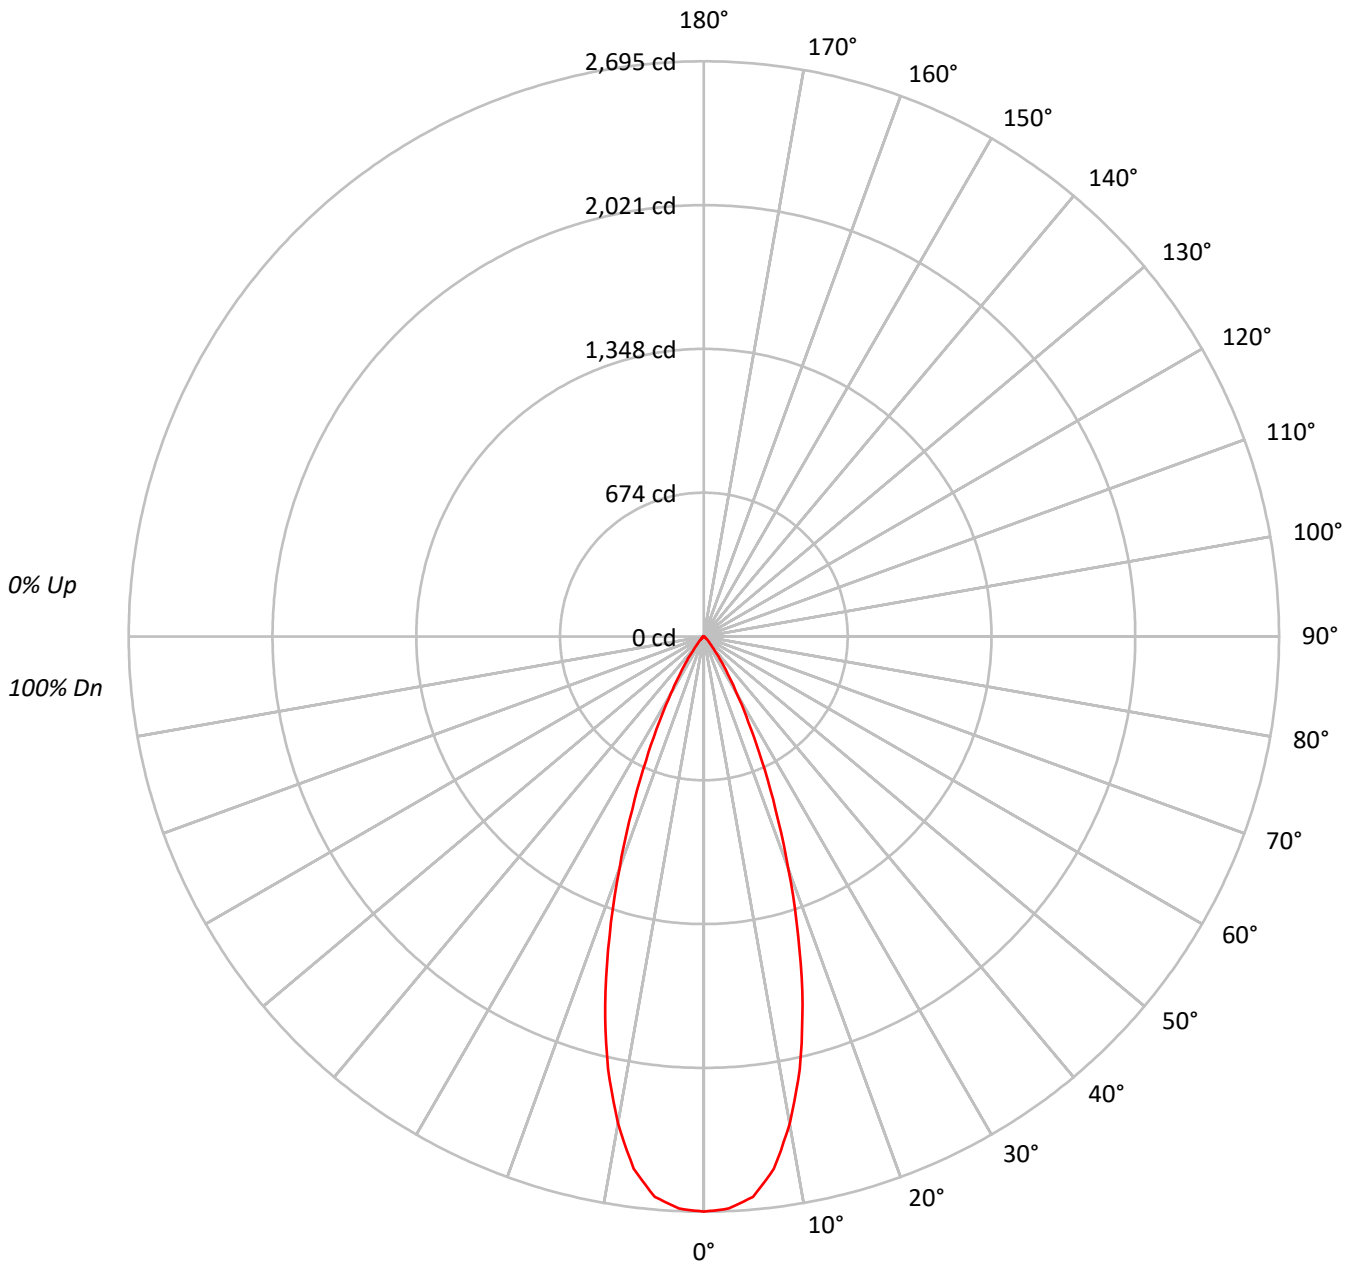



TEST NUMBER: P224405

CATALOG NUMBER: LD2B15D010 EU2B15FL409035 2LBDSQC*MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95			
2	110	106	102	99	108	104	101	98	101	98	96	98	96	94	95	94	92	91			
3	105	100	96	93	104	99	95	92	96	93	90	94	91	89	92	90	88	86			
4	101	95	90	87	100	94	90	86	92	88	85	90	87	85	88	86	84	82			
5	98	91	86	82	96	90	85	82	88	84	81	86	83	80	85	82	80	79			
6	94	86	82	78	93	86	81	78	84	80	77	83	79	77	82	79	76	75			
7	90	83	78	74	89	82	77	74	81	77	74	80	76	73	79	76	73	72			
8	87	79	74	71	86	79	74	71	78	74	71	77	73	70	76	73	70	69			
9	84	76	71	68	83	76	71	68	75	71	68	74	70	67	73	70	67	66			
10	81	73	68	65	80	73	68	65	72	68	65	71	68	65	71	67	65	64			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1043820
5°	1024789
10°	910972
15°	716445
20°	476756
25°	273700
30°	138251
35°	65019
40°	26192
45°	12983
50°	7111
55°	4997
60°	4571
65°	2750
70°	3398
75°	2245
80°	3346
85°	0



TEST NUMBER: P224405

CATALOG NUMBER: LD2B15D010 EU2B15FL409035 2LBDSQC*MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	241.4	20.9
10°-20°	484.0	42.0
20°-30°	301.1	26.1
30°-40°	92.6	8.0
40°-50°	20.4	1.8
50°-60°	7.2	0.6
60°-70°	3.7	0.3
70°-80°	2.2	0.2
80°-90°	0.6	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1026.4	89.0
0°-40°	1119.0	97.0
0°-60°	1146.6	99.4
0°-90°	1153.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1153.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2695	
5°	2636	241
15°	1787	484
25°	640	301
35°	138	93
45°	24	20
55°	7	7
65°	3	4
75°	2	2
85°	0	1
90°	0	



TEST NUMBER: P224405

CATALOG NUMBER: LD2B15D010 EU2B15FL409035 2LBDSQC*MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	2694.8
2.5°	2682.9
5°	2635.6
7.5°	2515.8
10°	2316.1
12.5°	2076.5
15°	1786.6
17.5°	1470.1
20°	1156.6
22.5°	877.1
25°	640.4
27.5°	451.1
30°	309.1
32.5°	208.5
35°	137.5
37.5°	82.8
40°	51.8
42.5°	35.5
45°	23.7
47.5°	16.3
50°	11.8
52.5°	10.4
55°	7.4
57.5°	5.9
60°	5.9
62.5°	4.4
65°	3.0
67.5°	3.0
70°	3.0
72.5°	3.0
75°	1.5
77.5°	1.5
80°	1.5
82.5°	1.5
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)