

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P#

Luminaire Tested: **LD2B15D010 EU2B15WFL559035 2LBD*GPH**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P#
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14806)
Test Lab: INNOVATION CENTER (G1)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD2B15D010 EU2B15WFL559035 2LBD*GPH
Description: 1500 Lumen, 2inch Portfolio LED Downlight
WIDE FLOOD OPTIC
SPUN ROUND TRIM WITH GRAPHITE FINISH
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1066.7 lumens
Efficiency: N/A
Efficacy: 74.6 lumens/watt
Spacing Criteria (0/90/45): 0.78 / 0.78 / 0.83
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 14.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P#

CATALOG NUMBER: LD2B15D010 EU2B15WFL559035 2LBD*GPH

Luminous Intensity Polar Plot

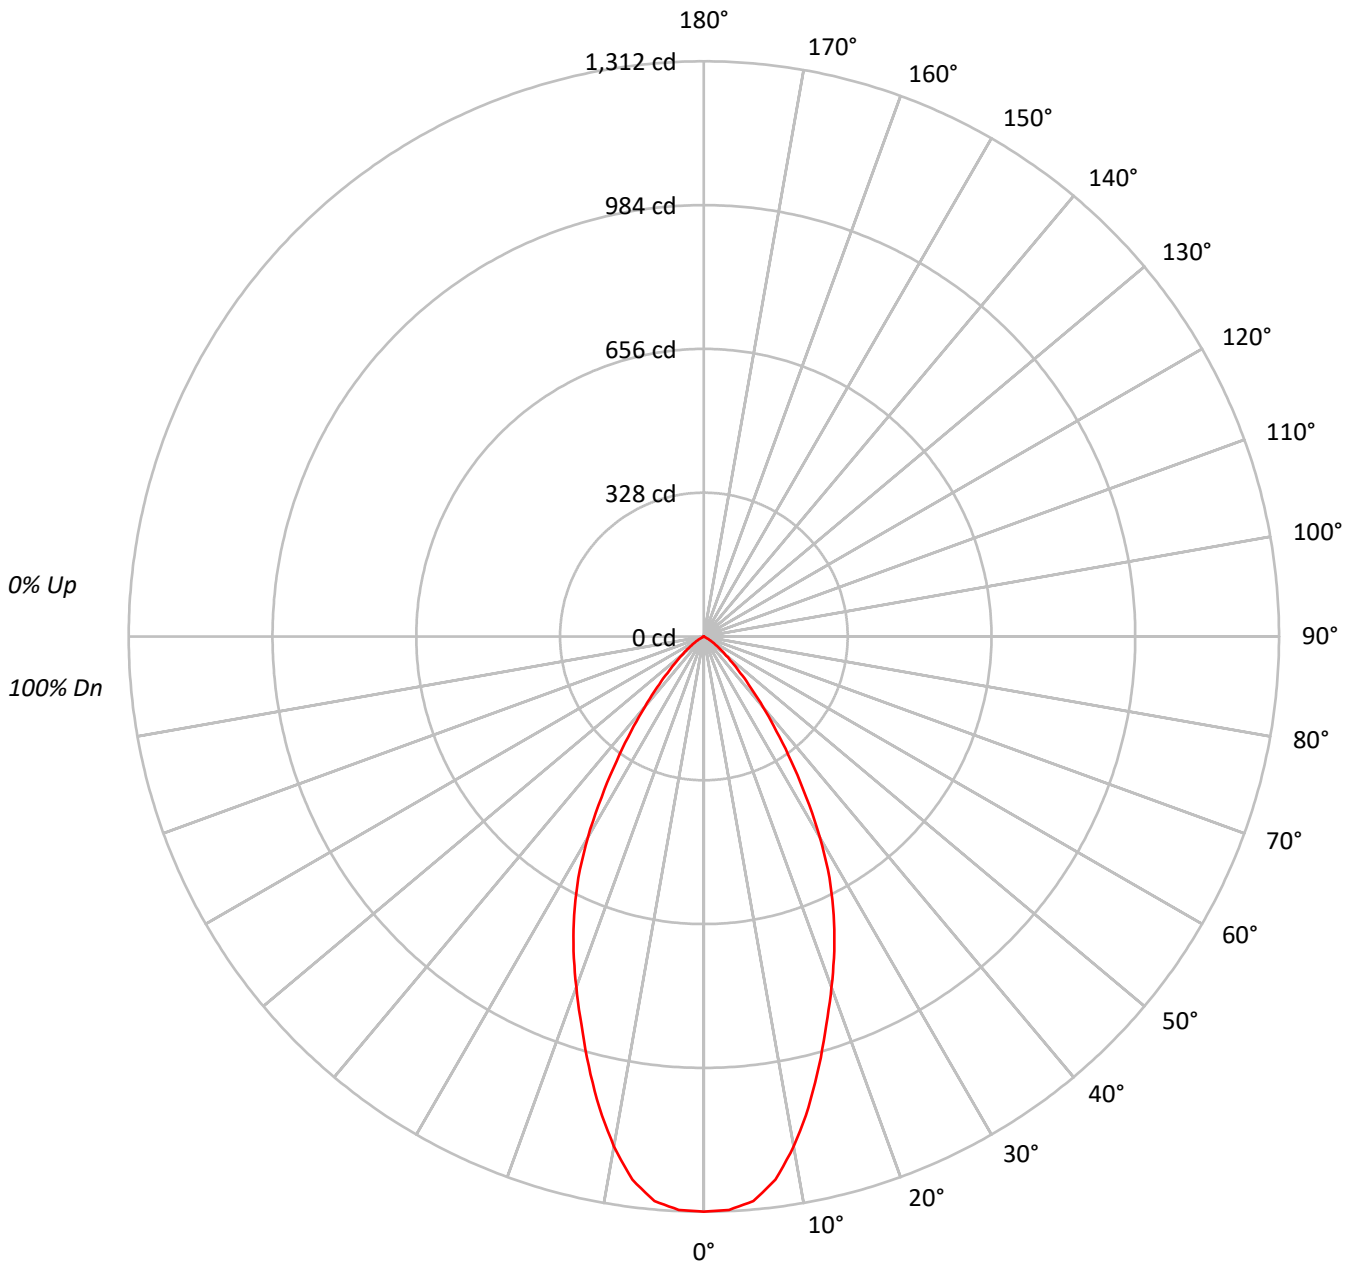



TEST NUMBER: P#

CATALOG NUMBER: LD2B15D010 EU2B15WFL559035 2LBD*GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93
2	108	103	99	95	105	101	97	94	98	95	92	95	92	90	92	90	88	86
3	102	95	90	86	100	94	89	86	91	88	84	89	86	83	87	84	82	80
4	97	89	83	79	95	88	83	79	86	81	78	84	80	77	82	79	76	74
5	92	83	77	73	90	82	77	72	80	75	72	79	74	71	77	73	70	69
6	87	78	72	67	85	77	71	67	75	70	67	74	70	66	73	69	66	64
7	83	73	67	63	81	72	67	62	71	66	62	70	65	62	69	65	61	60
8	78	69	63	58	77	68	62	58	67	62	58	66	61	58	65	61	58	56
9	75	65	59	55	74	64	59	55	63	58	54	62	58	54	62	57	54	53
10	71	61	55	51	70	61	55	51	60	55	51	59	54	51	58	54	51	50

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	508237
5°	502674
10°	464591
15°	406865
20°	350786
25°	299471
30°	236873
35°	163894
40°	106084
45°	64365
50°	37663
55°	21070
60°	8057
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P#

CATALOG NUMBER: LD2B15D010 EU2B15WFL559035 2LBD*GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	119.8	11.2
10°-20°	282.9	26.5
20°-30°	318.3	29.8
30°-40°	219.5	20.6
40°-50°	94.8	8.9
50°-60°	29.4	2.8
60°-70°	2.0	0.2
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	721.0	67.6
0°-40°	940.5	88.2
0°-60°	1064.7	99.8
0°-90°	1066.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1066.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1312	
5°	1293	120
15°	1015	283
25°	701	318
35°	347	220
45°	118	95
55°	31	29
65°	0	2
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P#

CATALOG NUMBER: LD2B15D010 EU2B15WFL559035 2LBD*GPH

CANDELA DISTRIBUTION (FULL):

	0°
0°	1312.1
2.5°	1309.2
5°	1292.8
7.5°	1249.7
10°	1181.2
12.5°	1100.9
15°	1014.6
17.5°	928.3
20°	851.0
22.5°	776.6
25°	700.7
27.5°	620.4
30°	529.6
32.5°	434.4
35°	346.6
37.5°	272.2
40°	209.8
42.5°	157.7
45°	117.5
47.5°	86.3
50°	62.5
52.5°	44.6
55°	31.2
57.5°	20.8
60°	10.4
62.5°	3.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)