

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P264775

Luminaire Tested: **LD2B15D010 EU2B1510SP158040 2LBDL*WMH**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P264775
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1711-432-2)
Test Lab: INNOVATION CENTER(G3)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD2B15D010 EU2B1510SP158040 2LBDL*WMH
Description: 1500 Lumen, 2inch Portfolio LED Downlight
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1293.0 lumens
Efficiency: N/A
Efficacy: 90.4 lumens/watt
Spacing Criteria (0/90/45): 0.31 / 0.31 / 0.32
Luminous Opening: Circular (Dia: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 14.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P264775

CATALOG NUMBER: LD2B15D010 EU2B1510SP158040 2LBDL*WMH

Luminous Intensity Polar Plot

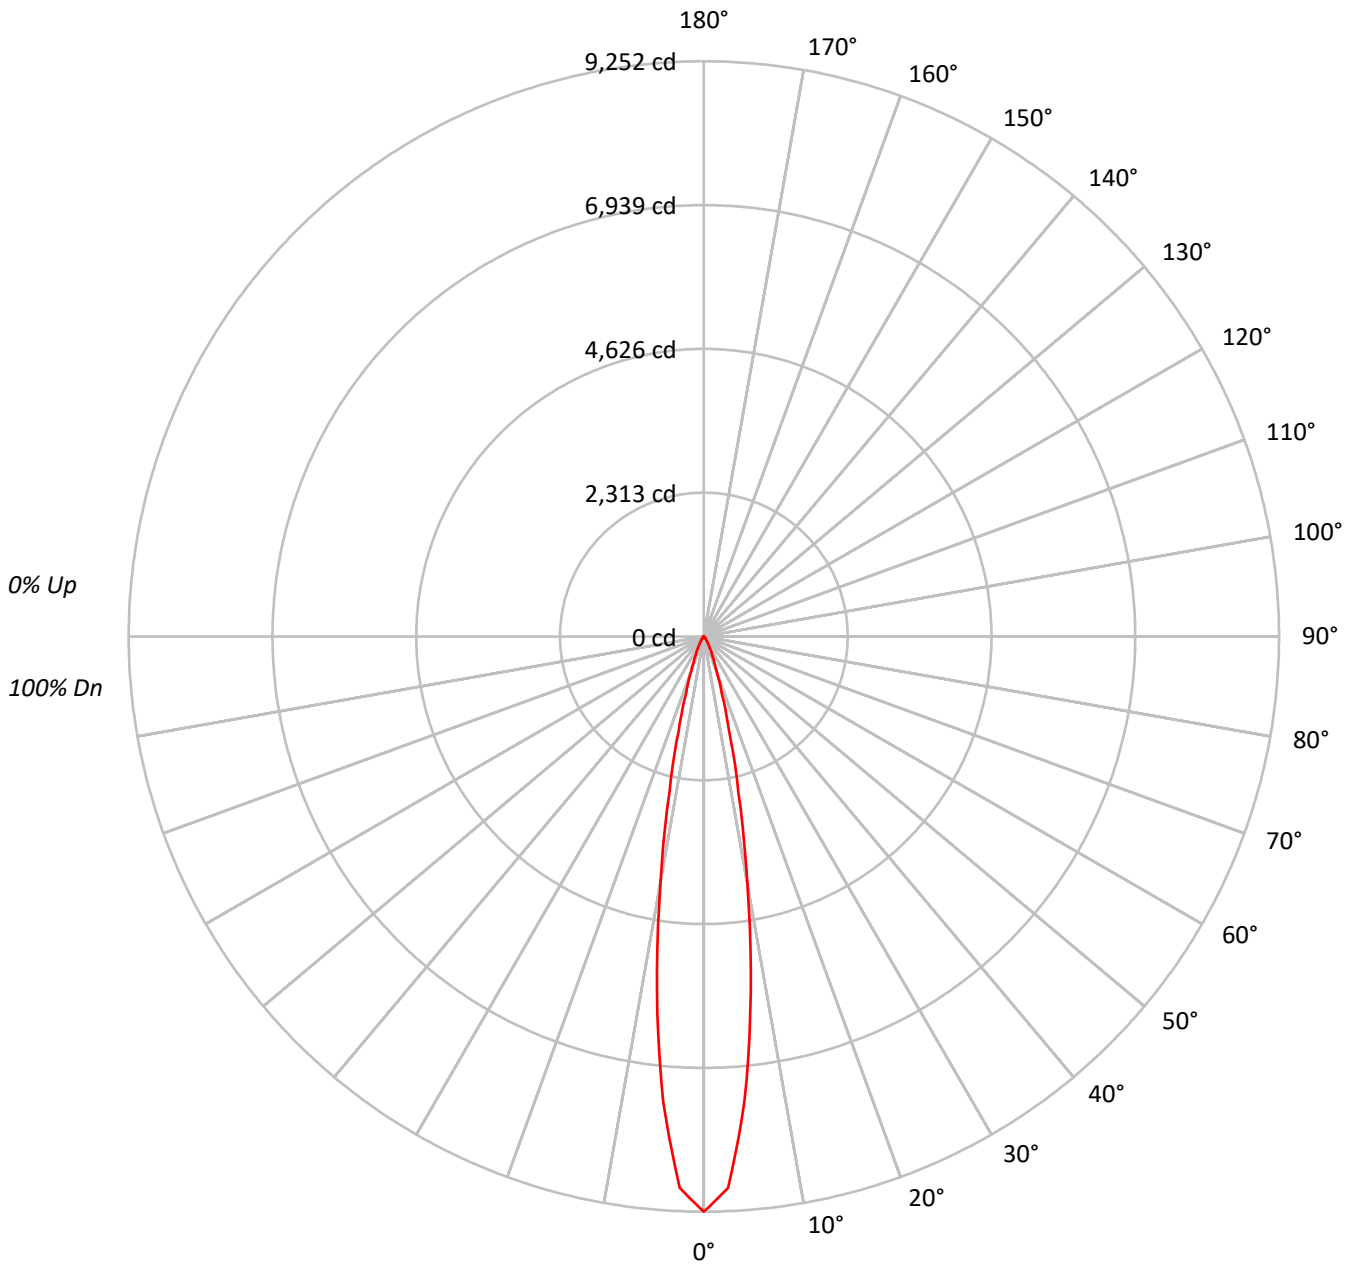



TEST NUMBER: P264775

CATALOG NUMBER: LD2B15D010 EU2B1510SP158040 2LBDL*WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									20									20
RC	80									50									30									10									0									
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR	0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100	100	100	100	100	100	100	100	100																
	1	115	113	111	110	113	111	110	108	107	106	105	104	103	102	100	99	99	97	97	97	97	97	97	97	97	97	97	97	97																
	2	112	108	106	103	110	107	104	102	104	102	100	101	99	98	98	97	96	94	94	94	94	94	94	94	94	94	94	94	94																
	3	109	104	101	98	107	103	100	97	100	98	96	98	96	94	96	94	93	92	92	92	92	92	92	92	92	92	92	92	92																
	4	105	100	97	94	104	99	96	93	97	95	92	96	93	91	94	92	90	89	89	89	89	89	89	89	89	89	89	89	89																
	5	103	97	93	91	101	96	93	90	95	92	89	93	91	89	92	90	88	87	87	87	87	87	87	87	87	87	87	87	87																
	6	100	94	90	88	99	94	90	87	92	89	87	91	88	86	90	88	86	85	85	85	85	85	85	85	85	85	85	85	85																
	7	98	92	88	85	97	91	88	85	90	87	85	89	86	84	88	86	84	83	83	83	83	83	83	83	83	83	83	83	83	83															
	8	95	89	86	83	94	89	85	83	88	85	82	87	84	82	86	84	82	81	81	81	81	81	81	81	81	81	81	81	81	81															
	9	93	87	83	81	92	87	83	81	86	83	81	85	82	80	85	82	80	79	79	79	79	79	79	79	79	79	79	79	79	79															
	10	91	85	82	79	91	85	81	79	84	81	79	84	81	79	83	80	78	78	78	78	78	78	78	78	78	78	78	78	78	78															

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	4564534
5°	3715090
10°	2006796
15°	800166
20°	320843
25°	153620
30°	79642
35°	42100
40°	23379
45°	14443
50°	9901
55°	6709
60°	5131
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P264775

CATALOG NUMBER: LD2B15D010 EU2B1510SP158040 2LBDL*WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	603.3	46.7
10°-20°	476.0	36.8
20°-30°	140.4	10.9
30°-40°	46.7	3.6
40°-50°	17.6	1.4
50°-60°	7.8	0.6
60°-70°	1.3	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1219.7	94.3
0°-40°	1266.4	97.9
0°-60°	1291.8	99.9
0°-90°	1293.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1293.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	9252	
5°	7502	603
15°	1567	476
25°	282	140
35°	70	47
45°	21	18
55°	8	8
65°	0	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P264775

CATALOG NUMBER: LD2B15D010 EU2B1510SP158040 2LBDL*WMH

CANDELA DISTRIBUTION (FULL):

	0°
0°	9251.9
2.5°	8879.1
5°	7501.5
7.5°	5779.5
10°	4005.8
12.5°	2563.5
15°	1566.6
17.5°	955.5
20°	611.1
22.5°	409.1
25°	282.2
27.5°	199.4
30°	139.8
32.5°	98.4
35°	69.9
37.5°	49.2
40°	36.3
42.5°	28.5
45°	20.7
47.5°	18.1
50°	12.9
52.5°	10.4
55°	7.8
57.5°	7.8
60°	5.2
62.5°	2.6
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)