

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P#

Luminaire Tested: **LD2B15D010 EU2B15FL408040 2LBD*LI**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P#
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P29152)
Test Lab: INNOVATION CENTER-P2
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD2B15D010 EU2B15FL408040 2LBD*LI
Description: 1500 Lumen, 2inch Portfolio LED Downlight
FLOOD OPTIC
SPUN ROUND TRIM WITH LI FINISH
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1458.2 lumens
Efficiency: N/A
Efficacy: 102.0 lumens/watt
Spacing Criteria (0/90/45): 0.59 / 0.59 / 0.58
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 14.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P#

CATALOG NUMBER: LD2B15D010 EU2B15FL408040 2LBD*LI

Luminous Intensity Polar Plot

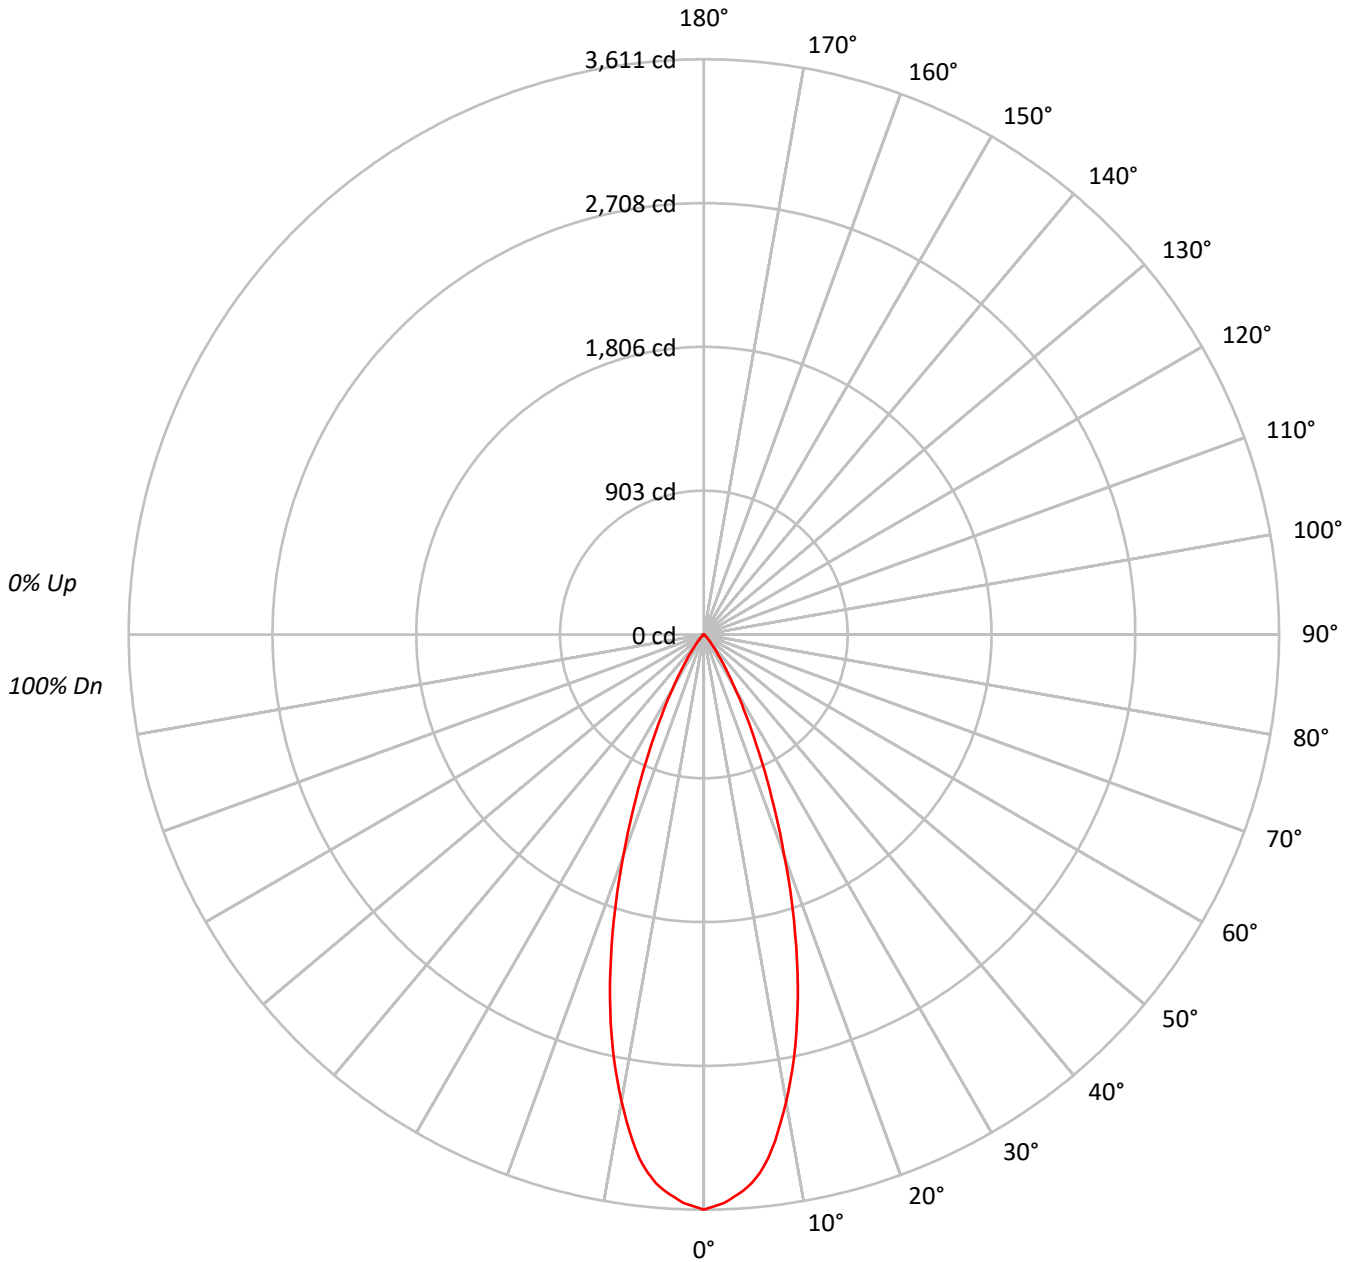



TEST NUMBER: P#

CATALOG NUMBER: LD2B15D010 EU2B15FL408040 2LBD*LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	114	112	110	108	112	110	108	106	106	105	103	102	101	100	99	98	97	96	96	96	96
2	110	106	103	100	108	104	101	99	101	99	97	98	96	95	96	94	93	91	91	91	91
3	106	101	96	93	104	99	95	92	97	94	91	94	92	90	92	90	88	87	87	87	87
4	102	96	91	88	100	95	90	87	93	89	86	91	88	85	89	86	84	83	83	83	83
5	98	91	86	83	97	90	86	83	89	85	82	87	84	81	86	83	81	79	79	79	79
6	94	87	82	79	93	86	82	79	85	81	78	84	80	78	83	79	77	76	76	76	76
7	91	83	79	75	90	83	78	75	82	78	75	81	77	74	80	76	74	73	73	73	73
8	88	80	75	72	87	80	75	72	79	74	71	78	74	71	77	73	71	70	70	70	70
9	85	77	72	69	84	76	72	69	76	71	69	75	71	68	74	71	68	67	67	67	67
10	82	74	69	66	81	74	69	66	73	69	66	72	68	66	72	68	66	65	65	65	65

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1398784
5°	1344209
10°	1170131
15°	913742
20°	607673
25°	347980
30°	173004
35°	79535
40°	31906
45°	14571
50°	6749
55°	3782
60°	2169
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P#

CATALOG NUMBER: LD2B15D010 EU2B15FL408040 2LBD*LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	314.6	21.6
10°-20°	617.9	42.4
20°-30°	382.4	26.2
30°-40°	114.4	7.8
40°-50°	22.9	1.6
50°-60°	5.6	0.4
60°-70°	0.3	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1314.9	90.2
0°-40°	1429.4	98.0
0°-60°	1457.9	100.0
0°-90°	1458.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1458.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3611	
5°	3457	315
15°	2279	618
25°	814	382
35°	168	114
45°	27	23
55°	6	6
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P#

CATALOG NUMBER: LD2B15D010 EU2B15FL408040 2LBD*LI

CANDELA DISTRIBUTION (FULL):

	0°
0°	3611.2
1°	3591.6
2°	3573.4
3°	3536.9
4°	3503.3
5°	3457.1
6°	3394.0
7°	3314.1
8°	3211.8
9°	3095.5
10°	2975.0
11°	2850.3
12°	2717.2
13°	2578.4
14°	2429.9
15°	2278.6
17.5°	1879.2
20°	1474.2
22.5°	1115.5
25°	814.2
27.5°	571.7
30°	386.8
32.5°	255.0
35°	168.2
37.5°	105.1
40°	63.1
42.5°	40.6
45°	26.6
47.5°	16.8
50°	11.2
52.5°	8.4
55°	5.6
57.5°	4.2
60°	2.8
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0



TEST NUMBER: P#

CATALOG NUMBER: LD2B15D010 EU2B15FL408040 2LBD*LI

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







85°		0.0
87.5°		0.0



(END OF REPORT)