

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P264411

Luminaire Tested: **LD2B15D010 EU2B1510SP159040 2LBD\*WMH**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P264411  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-1805-787-1)  
Test Lab: INNOVATION CENTER(G2)  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LD2B15D010 EU2B1510SP159040 2LBD\*WMH  
Description: 1500 Lumen, 2inch Portfolio LED Downlight  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1058.0 lumens  
Efficiency: N/A  
Efficacy: 74.0 lumens/watt  
Spacing Criteria (0/90/45): 0.28 / 0.28 / 0.28  
Luminous Opening: Circular (Dia: 0.17' x H: 0')  
CIE Type: Direct


Input Watts (W): 14.3  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P264411

CATALOG NUMBER: LD2B15D010 EU2B1510SP159040 2LBD\*WMH

### Luminous Intensity Polar Plot

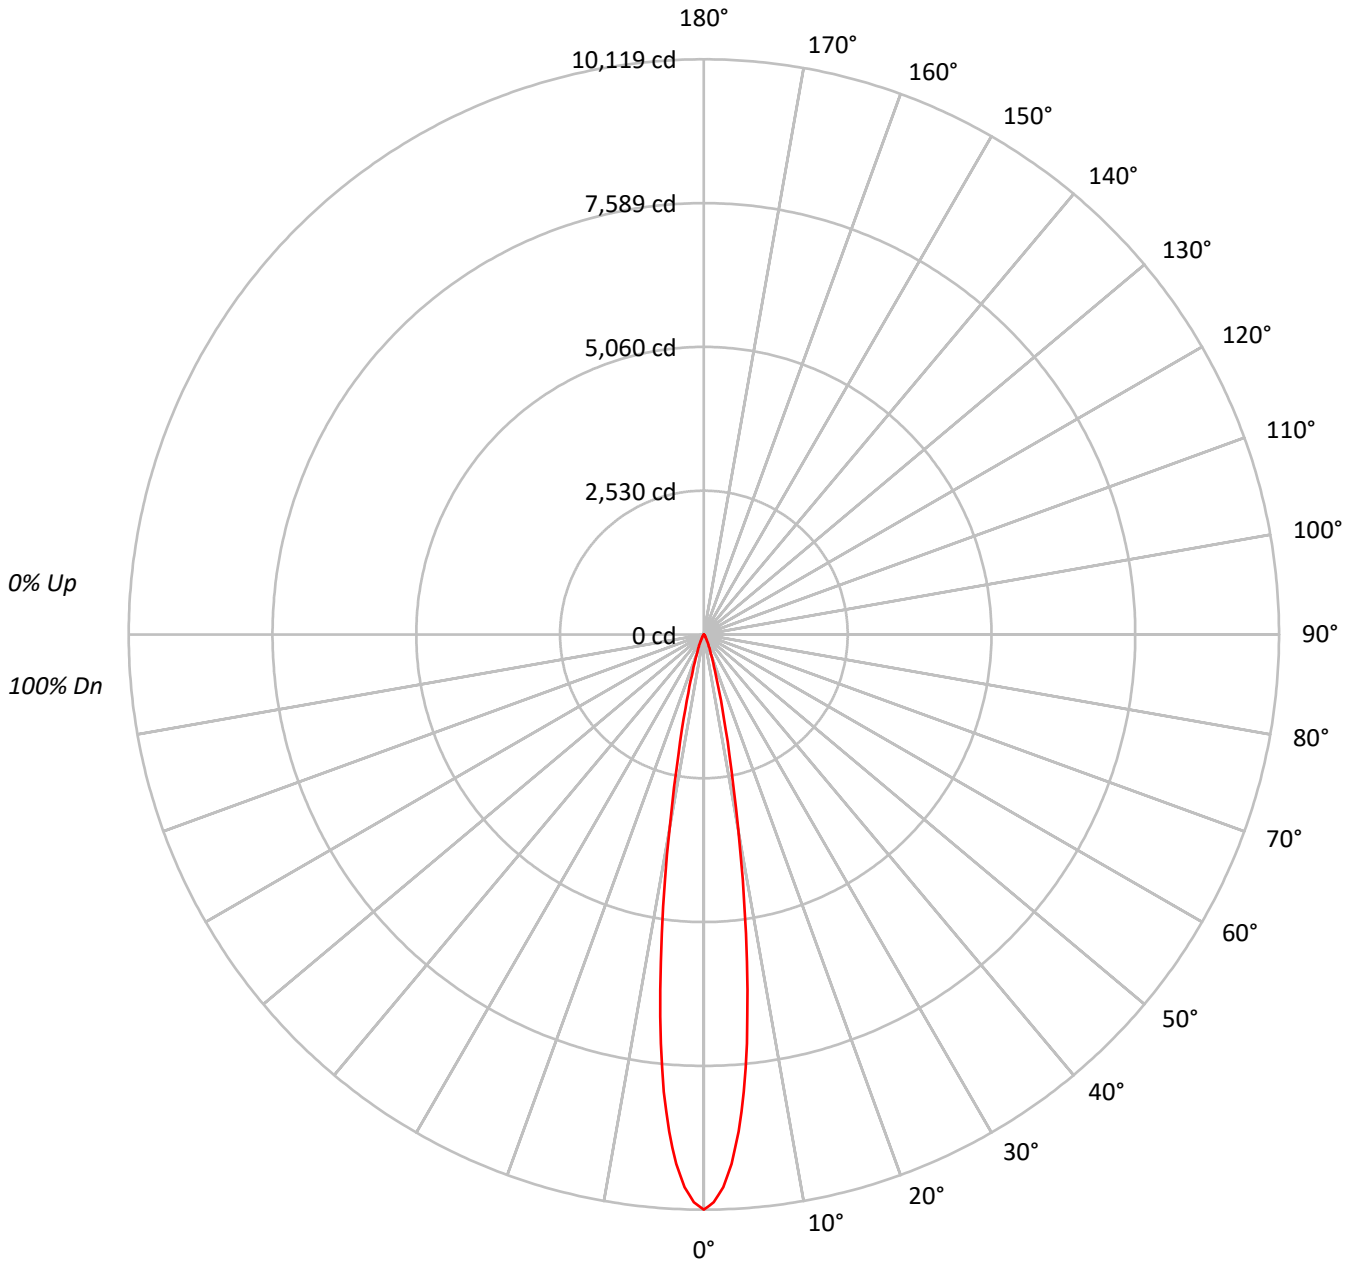



TEST NUMBER: P264411

CATALOG NUMBER: LD2B15D010 EU2B1510SP159040 2LBD\*WMH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	116	114	112	111	113	112	110	109	108	107	106	104	103	102	101	100	100	98			98
2	113	109	107	105	111	108	106	104	105	103	101	102	101	99	99	98	97	96			96
3	110	106	103	100	108	105	102	100	102	100	98	100	98	97	98	96	95	94			94
4	107	103	99	97	106	102	99	96	100	97	95	98	96	94	96	95	93	92			92
5	105	100	97	94	104	99	96	94	98	95	93	96	94	92	95	93	91	90			90
6	103	98	94	92	102	97	94	91	96	93	91	95	92	90	93	91	90	89			89
7	101	95	92	90	100	95	92	89	94	91	89	93	90	89	92	90	88	87			87
8	99	93	90	88	98	93	90	88	92	89	87	91	89	87	91	88	87	86			86
9	97	92	88	86	96	91	88	86	91	88	86	90	87	86	89	87	85	85			85
10	95	90	87	85	95	90	87	85	89	86	85	89	86	84	88	86	84	83			83

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	4992279
5°	4001541
10°	1746541
15°	541258
20°	188694
25°	83342
30°	37713
35°	19634
40°	11206
45°	5303
50°	3300
55°	1892
60°	1085
65°	1284
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P264411

CATALOG NUMBER: LD2B15D010 EU2B1510SP159040 2LBD\*WMH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	613.6	58.0
10°-20°	336.0	31.8
20°-30°	76.6	7.2
30°-40°	22.0	2.1
40°-50°	6.8	0.6
50°-60°	2.1	0.2
60°-70°	1.0	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1026.2	97.0
0°-40°	1048.2	99.1
0°-60°	1057.1	99.9
0°-90°	1058.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1058.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	10119	
5°	8080	614
15°	1060	336
25°	153	77
35°	33	22
45°	8	7
55°	2	2
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P264411

CATALOG NUMBER: LD2B15D010 EU2B1510SP159040 2LBD\*WMH

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	10118.9
1°	9993.0
2°	9731.3
3°	9325.3
4°	8767.2
5°	8079.9
6°	7237.4
7°	6296.1
8°	5313.5
9°	4362.4
10°	3486.3
11°	2744.7
12°	2160.6
13°	1700.2
14°	1343.0
15°	1059.7
16°	836.0
17°	665.5
18°	535.3
19°	435.4
20°	359.4
22.5°	232.3
25°	153.1
26°	129.2
27°	109.7
28°	92.3
29°	77.1
30°	66.2
32.5°	45.6
35°	32.6
37.5°	23.9
40°	17.4
42.5°	11.9
45°	7.6
47.5°	5.4
50°	4.3
52.5°	3.3
55°	2.2
57.5°	1.1
60°	1.1
62.5°	1.1
65°	1.1
67.5°	1.1



TEST NUMBER: P264411

CATALOG NUMBER: LD2B15D010 EU2B1510SP159040 2LBD\*WMH

**CANDELA DISTRIBUTION (continued):**

	0°
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







70°		0.0
72.5°		0.0



(END OF REPORT)