

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P#

Luminaire Tested: **LD2B15D010 EU2B15WFL559040 2LBDSQC*MMS**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P#
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14811)
Test Lab: INNOVATION CENTER (G1)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD2B15D010 EU2B15WFL559040 2LBDSQC*MMS
Description: 1500 Lumen, 2inch Portfolio LED Downlight
WIDE FLOOD OPTIC
SQUARE CAST TRIM WITH MATTE METALLIC SILVER
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1070.3 lumens
Efficiency: N/A
Efficacy: 74.8 lumens/watt
Spacing Criteria (0/90/45): 0.79 / 0.79 / 0.83
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')
CIE Type: Direct

Input Watts (W): 14.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P#
CATALOG NUMBER: LD2B15D010 EU2B15WFL559040 2LBDSQC*MMS

Luminous Intensity Polar Plot

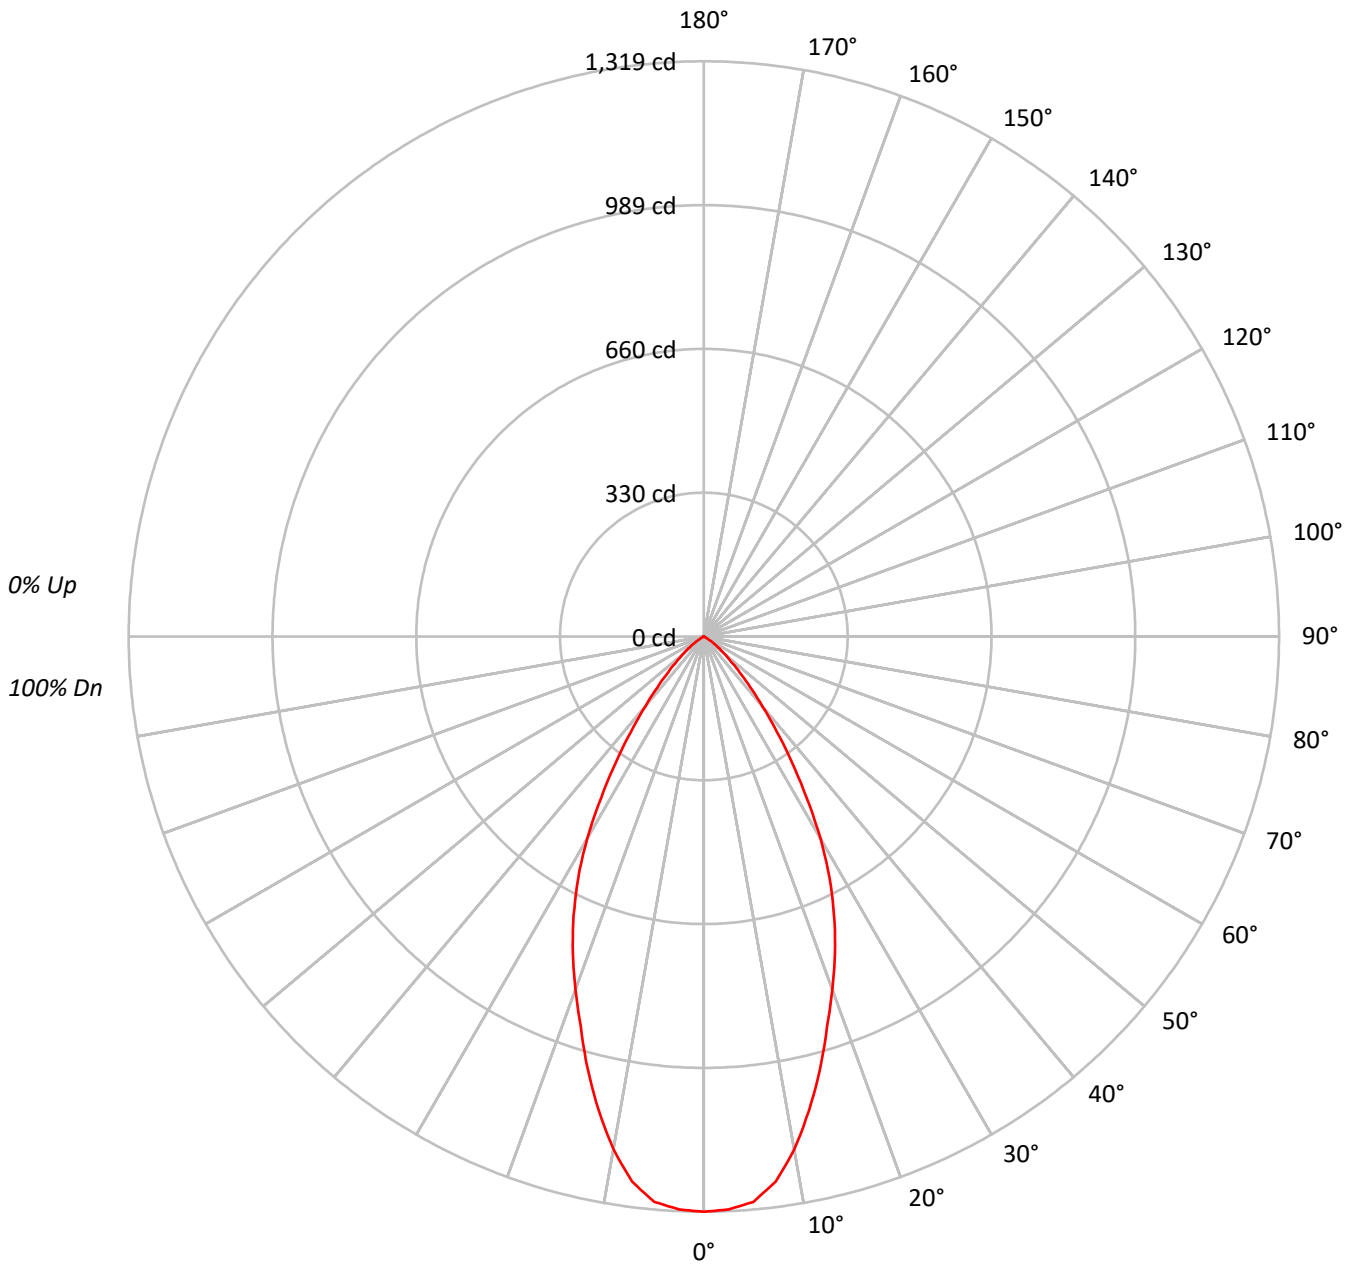



TEST NUMBER: P#

CATALOG NUMBER: LD2B15D010 EU2B15WFL559040 2LBDSQC*MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93			
2	108	103	99	95	105	101	97	94	98	95	92	95	92	90	92	90	88	87			
3	102	96	91	87	100	94	90	86	92	88	84	89	86	83	87	84	82	80			
4	97	89	84	79	95	88	83	79	86	81	78	84	80	77	82	79	76	74			
5	92	83	77	73	90	82	77	73	81	76	72	79	75	71	77	74	71	69			
6	87	78	72	68	86	77	72	67	76	71	67	74	70	66	73	69	66	65			
7	83	73	67	63	81	73	67	63	71	66	62	70	65	62	69	65	62	60			
8	79	69	63	59	77	68	63	59	67	62	58	66	62	58	65	61	58	56			
9	75	65	59	55	74	65	59	55	64	58	55	63	58	55	62	58	54	53			
10	71	62	56	52	70	61	55	52	60	55	51	59	55	51	59	54	51	50			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	510987
5°	506057
10°	469744
15°	412359
20°	354826
25°	301993
30°	239155
35°	166022
40°	105477
45°	63598
50°	36277
55°	19854
60°	2247
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P#

CATALOG NUMBER: LD2B15D010 EU2B15WFL559040 2LBDSQC*MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	120.7	11.3
10°-20°	286.2	26.7
20°-30°	321.3	30.0
30°-40°	221.4	20.7
40°-50°	93.6	8.7
50°-60°	26.4	2.5
60°-70°	0.7	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	728.2	68.0
0°-40°	949.7	88.7
0°-60°	1069.6	99.9
0°-90°	1070.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1070.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1319	
5°	1302	121
15°	1028	286
25°	707	321
35°	351	221
45°	116	94
55°	29	26
65°	0	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P#

CATALOG NUMBER: LD2B15D010 EU2B15WFL559040 2LBDSQC*MMS

CANDELA DISTRIBUTION (FULL):

	0°
0°	1319.2
2.5°	1314.8
5°	1301.5
7.5°	1260.4
10°	1194.3
12.5°	1113.5
15°	1028.3
17.5°	938.7
20°	860.8
22.5°	785.9
25°	706.6
27.5°	624.3
30°	534.7
32.5°	437.8
35°	351.1
37.5°	274.7
40°	208.6
42.5°	157.2
45°	116.1
47.5°	83.7
50°	60.2
52.5°	44.1
55°	29.4
57.5°	14.7
60°	2.9
62.5°	1.5
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)