

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P#

Luminaire Tested: **LD2B15D010 EU2B15WFL559040 2LBDSQLC*MW**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P#
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14810)
Test Lab: INNOVATION CENTER (G1)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD2B15D010 EU2B15WFL559040 2LBDSQLC*MW
Description: 1500 Lumen, 2inch Portfolio LED Downlight
WIDE FLOOD OPTIC
LENSED SQUARE CAST TRIM WITH MATTE WHITE FINISH
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 985.8 lumens
Efficiency: N/A
Efficacy: 68.9 lumens/watt
Spacing Criteria (0/90/45): 0.79 / 0.79 / 0.84
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')
CIE Type: Direct

Input Watts (W): 14.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P#
CATALOG NUMBER: LD2B15D010 EU2B15WFL559040 2LBDSQLC*MW

Luminous Intensity Polar Plot

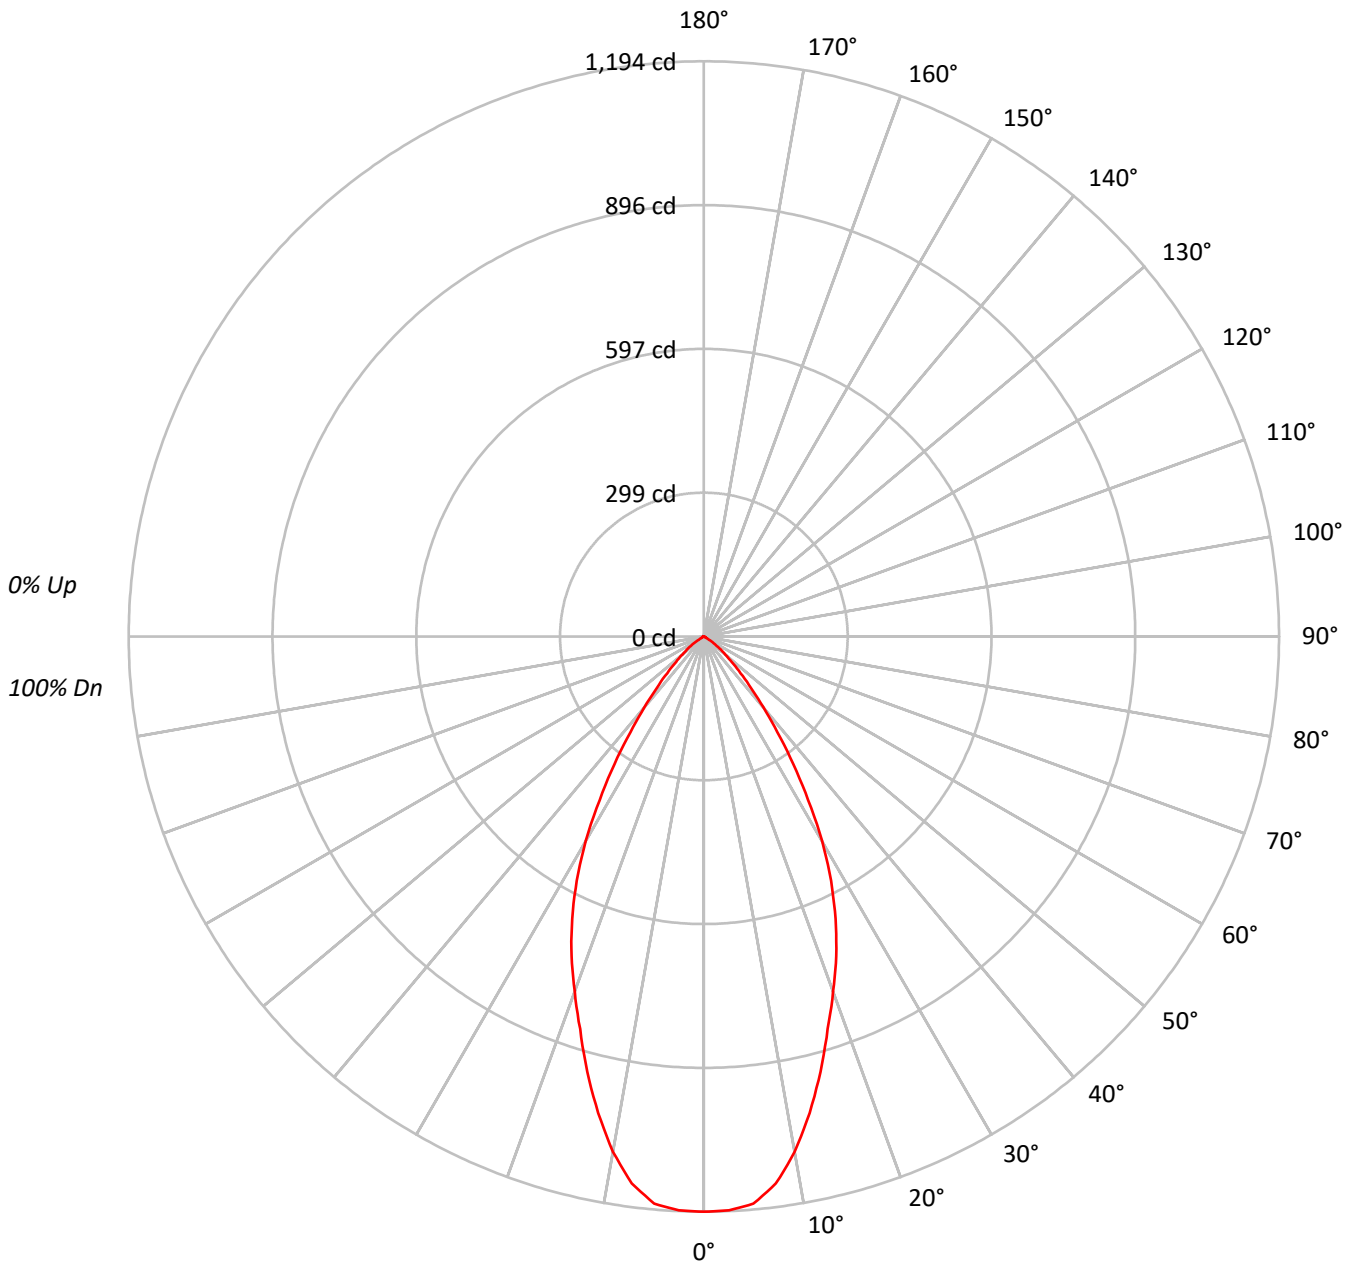



TEST NUMBER: P#

CATALOG NUMBER: LD2B15D010 EU2B15WFL559040 2LBDSQLC*MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	113	110	108	106	111	108	106	104	104	102	101	101	99	98	97	96	95	93				93
2	108	102	98	95	105	101	97	94	98	94	92	95	92	90	92	90	88	86				86
3	102	95	90	86	100	94	89	85	91	87	84	89	85	83	87	84	81	80				80
4	97	89	83	79	95	88	82	78	85	81	77	83	80	76	82	78	76	74				74
5	91	83	77	72	90	82	76	72	80	75	71	78	74	71	77	73	70	69				69
6	87	78	71	67	85	77	71	67	75	70	66	74	69	66	73	69	65	64				64
7	82	73	67	62	81	72	66	62	71	66	62	70	65	62	69	64	61	60				60
8	78	69	62	58	77	68	62	58	67	62	58	66	61	58	65	61	57	56				56
9	74	65	59	55	73	64	58	54	63	58	54	62	57	54	61	57	54	53				53
10	71	61	55	51	70	61	55	51	60	55	51	59	54	51	58	54	51	49				49

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	462491
5°	459514
10°	427226
15°	375025
20°	323292
25°	276435
30°	219385
35°	152924
40°	96780
45°	59052
50°	34891
55°	19111
60°	4183
65°	3666
70°	3058
75°	4041
80°	2900
85°	5778



TEST NUMBER: P#

CATALOG NUMBER: LD2B15D010 EU2B15WFL559040 2LBDSQLC*MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	109.7	11.1
10°-20°	260.5	26.4
20°-30°	293.9	29.8
30°-40°	203.3	20.6
40°-50°	86.7	8.8
50°-60°	25.1	2.5
60°-70°	3.6	0.4
70°-80°	2.3	0.2
80°-90°	0.9	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	664.0	67.4
0°-40°	867.3	88.0
0°-60°	979.0	99.3
0°-90°	985.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	985.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1194	
5°	1182	110
15°	935	260
25°	647	294
35°	323	203
45°	108	87
55°	28	25
65°	4	4
75°	3	2
85°	1	1
90°	0	



TEST NUMBER: P#

CATALOG NUMBER: LD2B15D010 EU2B15WFL559040 2LBDSQLC*MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	1194.0
2.5°	1192.6
5°	1181.8
7.5°	1145.4
10°	1086.2
12.5°	1013.4
15°	935.2
17.5°	854.4
20°	784.3
22.5°	718.3
25°	646.8
27.5°	571.4
30°	490.5
32.5°	402.9
35°	323.4
37.5°	250.7
40°	191.4
42.5°	144.2
45°	107.8
47.5°	78.2
50°	57.9
52.5°	41.8
55°	28.3
57.5°	12.1
60°	5.4
62.5°	4.0
65°	4.0
67.5°	2.7
70°	2.7
72.5°	2.7
75°	2.7
77.5°	1.3
80°	1.3
82.5°	1.3
85°	1.3
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)