

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P225362

Luminaire Tested: **LD2B15D010 EU2B15FL409030D2W 2LBDC\*MW**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P225362  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14835)  
Test Lab: INNOVATION CENTER (G1)  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LD2B15D010 EU2B15FL409030D2W 2LBDC\*MW  
Description: 1500 Lumen, 2inch Portfolio LED Downlight  
FLOOD OPTIC  
CAST ROUND TRIM WITH MATTE WHITE FINISH  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 717.5 lumens  
Efficiency: N/A  
Efficacy: 50.2 lumens/watt  
Spacing Criteria (0/90/45): 0.61 / 0.61 / 0.59  
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')  
CIE Type: Direct


Input Watts (W): 14.3  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P225362

CATALOG NUMBER: LD2B15D010 EU2B15FL409030D2W 2LBDC\*MW

### Luminous Intensity Polar Plot

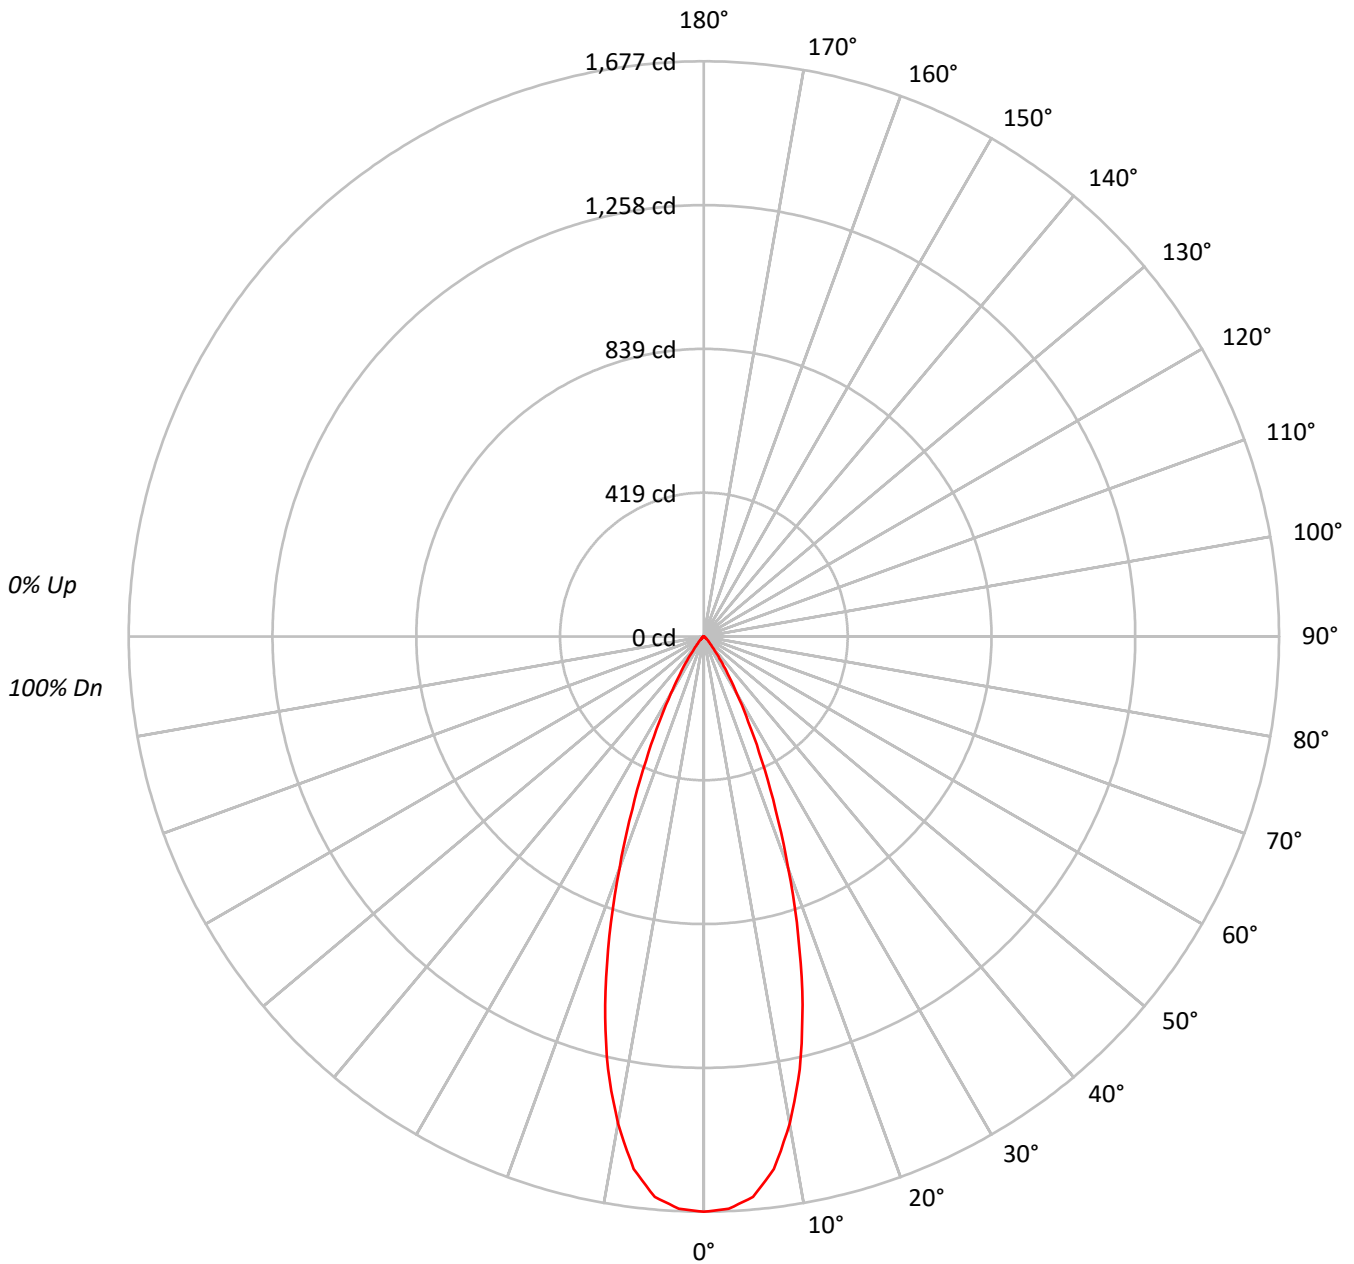



TEST NUMBER: P225362

CATALOG NUMBER: LD2B15D010 EU2B15FL409030D2W 2LBDC\*MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95			95
2	110	106	102	99	108	104	101	98	101	98	96	98	96	94	95	94	92	91			91
3	105	100	96	93	104	99	95	92	96	93	90	94	91	89	92	90	88	86			86
4	101	95	90	87	100	94	90	86	92	88	85	90	87	85	88	86	84	82			82
5	98	91	86	82	96	90	85	82	88	84	81	86	83	80	85	82	80	79			79
6	94	87	82	78	93	86	81	78	84	80	77	83	80	77	82	79	76	75			75
7	90	83	78	74	89	82	77	74	81	77	74	80	76	73	79	76	73	72			72
8	87	79	74	71	86	79	74	71	78	74	71	77	73	70	76	73	70	69			69
9	84	76	71	68	83	76	71	68	75	71	68	74	70	67	73	70	67	66			66
10	81	73	68	65	80	73	68	65	72	68	65	71	68	65	71	67	65	64			64

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	649618
5°	637791
10°	566973
15°	445923
20°	296705
25°	170357
30°	86054
35°	40477
40°	16282
45°	8053
50°	4459
55°	3106
60°	2866
65°	1650
70°	2039
75°	1347
80°	2008
85°	0



TEST NUMBER: P225362

CATALOG NUMBER: LD2B15D010 EU2B15FL409030D2W 2LBDC\*MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	150.2	20.9
10°-20°	301.2	42.0
20°-30°	187.4	26.1
30°-40°	57.6	8.0
40°-50°	12.7	1.8
50°-60°	4.5	0.6
60°-70°	2.2	0.3
70°-80°	1.3	0.2
80°-90°	0.4	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	638.8	89.0
0°-40°	696.4	97.1
0°-60°	713.6	99.5
0°-90°	717.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	717.5	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1677	
5°	1640	150
15°	1112	301
25°	399	187
35°	86	58
45°	15	13
55°	5	5
65°	2	2
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P225362

CATALOG NUMBER: LD2B15D010 EU2B15FL409030D2W 2LBDC\*MW

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1677.1
2.5°	1669.8
5°	1640.3
7.5°	1565.8
10°	1441.5
12.5°	1292.4
15°	1112.0
17.5°	915.0
20°	719.8
22.5°	545.8
25°	398.6
27.5°	280.7
30°	192.4
32.5°	129.8
35°	85.6
37.5°	51.6
40°	32.2
42.5°	22.1
45°	14.7
47.5°	10.1
50°	7.4
52.5°	6.4
55°	4.6
57.5°	3.7
60°	3.7
62.5°	2.7
65°	1.8
67.5°	1.8
70°	1.8
72.5°	1.8
75°	0.9
77.5°	0.9
80°	0.9
82.5°	0.9
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)