

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P263951

Luminaire Tested: **LD2B20D010 EU2B2010SP158027 2LBD\*LI**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P263951  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-1805-787-1)  
Test Lab: INNOVATION CENTER(G2)  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LD2B20D010 EU2B2010SP158027 2LBD\*LI  
Description: 2000 Lumen, 2inch Portfolio LED Downlight  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1716.0 lumens  
Efficiency: N/A  
Efficacy: 82.1 lumens/watt  
Spacing Criteria (0/90/45): 0.28 / 0.28 / 0.28  
Luminous Opening: Circular (Dia: 0.17' x H: 0')  
CIE Type: Direct


Input Watts (W): 20.9  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P263951

CATALOG NUMBER: LD2B20D010 EU2B2010SP158027 2LBD\*LI

### Luminous Intensity Polar Plot

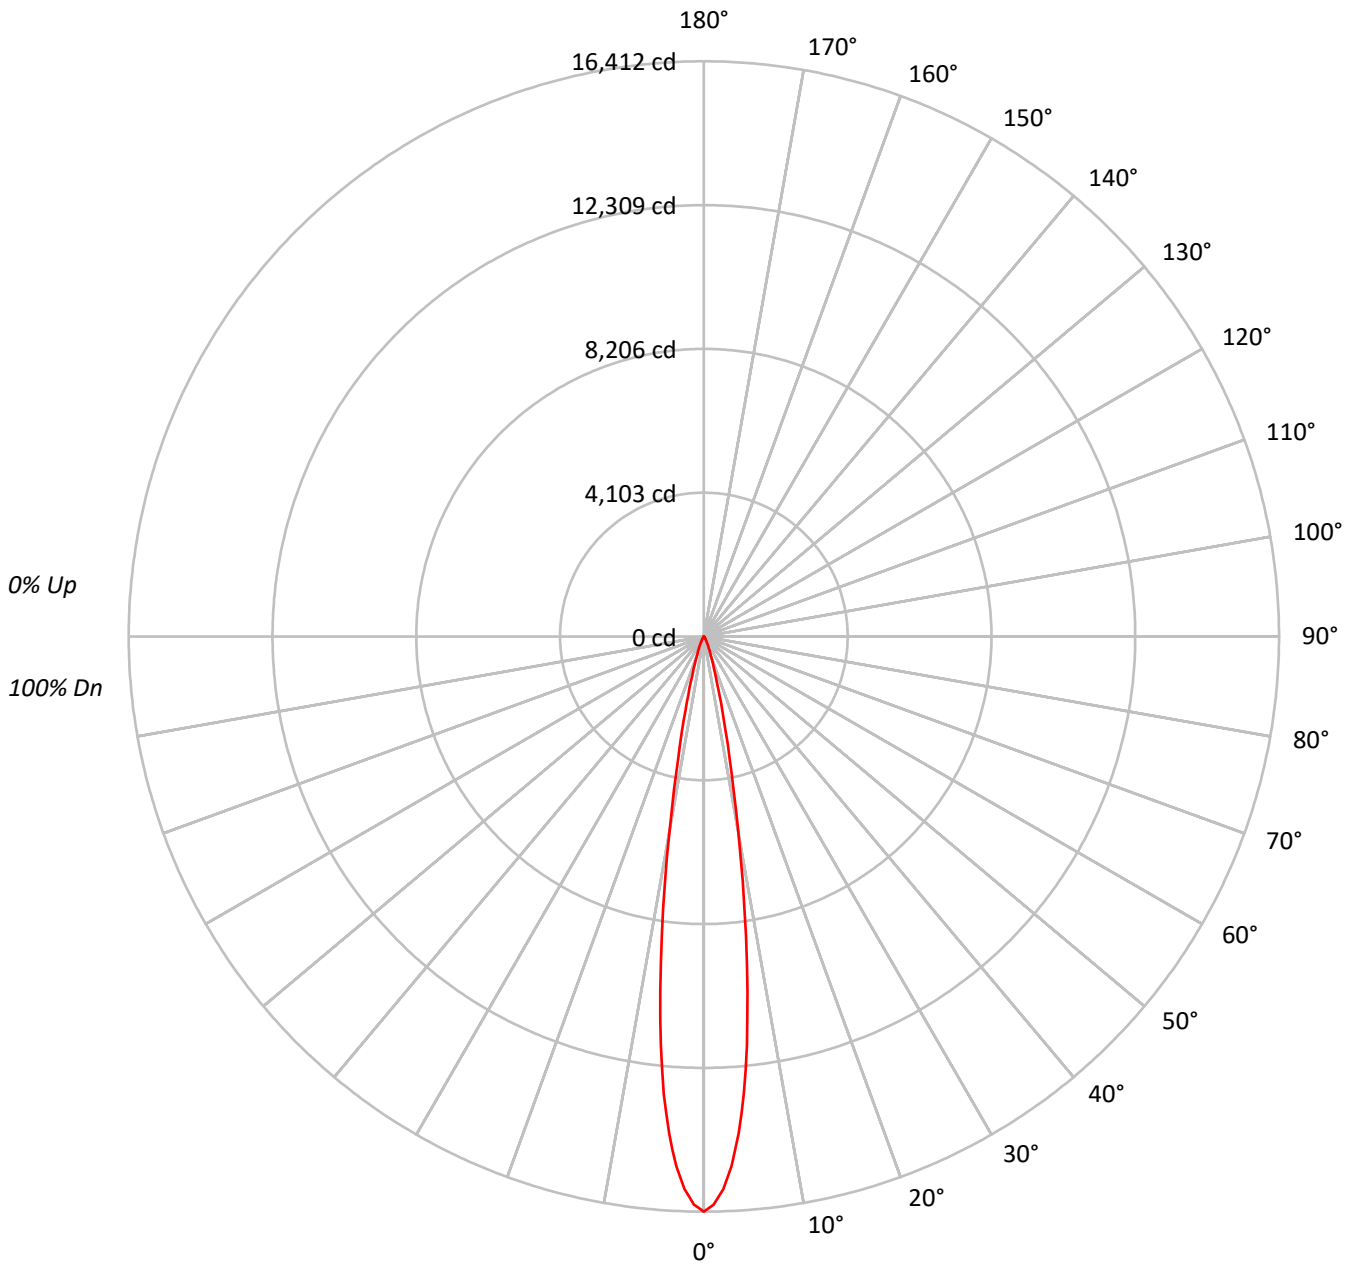



TEST NUMBER: P263951

CATALOG NUMBER: LD2B20D010 EU2B2010SP158027 2LBD\*LI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100						100													
1	116	114	112	111	113	112	110	109	108	107	106	104	103	102	101	100	100	98						98													
2	113	109	107	105	111	108	106	104	105	103	101	102	101	99	99	98	97	96						96													
3	110	106	103	100	108	105	102	100	102	100	98	100	98	97	98	96	95	94						94													
4	107	103	99	97	106	102	99	96	100	97	95	98	96	94	96	95	93	92						92													
5	105	100	97	94	104	99	96	94	98	95	93	96	94	92	95	93	91	90						90													
6	103	98	94	92	102	97	94	91	96	93	91	95	92	90	93	91	90	89						89													
7	101	95	92	90	100	95	92	89	94	91	89	93	90	89	92	90	88	87						87													
8	99	93	90	88	98	93	90	88	92	89	87	91	89	87	91	88	87	86						86													
9	97	92	88	86	96	91	88	86	91	88	86	90	87	86	89	87	85	85						85													
10	95	90	87	85	95	90	87	85	89	86	85	89	86	84	88	86	84	83						83													

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	8097152
5°	6490253
10°	2832700
15°	877853
20°	306037
25°	135166
30°	61184
35°	31801
40°	18162
45°	8582
50°	5373
55°	3011
60°	1776
65°	2101
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P263951

CATALOG NUMBER: LD2B20D010 EU2B2010SP158027 2LBD\*LI

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	995.2	58.0
10°-20°	545.0	31.8
20°-30°	124.2	7.2
30°-40°	35.7	2.1
40°-50°	11.0	0.6
50°-60°	3.3	0.2
60°-70°	1.6	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1664.4	97.0
0°-40°	1700.1	99.1
0°-60°	1714.5	99.9
0°-90°	1716.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1716.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	16412	
5°	13105	995
15°	1719	545
25°	248	124
35°	53	36
45°	12	11
55°	4	3
65°	2	2
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P263951

CATALOG NUMBER: LD2B20D010 EU2B2010SP158027 2LBD\*LI

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	16412.2
1°	16207.9
2°	15783.5
3°	15124.9
4°	14219.8
5°	13105.1
6°	11738.6
7°	10211.8
8°	8618.1
9°	7075.5
10°	5654.4
11°	4451.7
12°	3504.3
13°	2757.7
14°	2178.3
15°	1718.7
16°	1355.9
17°	1079.5
18°	868.2
19°	706.1
20°	582.9
22.5°	376.8
25°	248.3
26°	209.6
27°	177.9
28°	149.7
29°	125.0
30°	107.4
32.5°	74.0
35°	52.8
37.5°	38.7
40°	28.2
42.5°	19.4
45°	12.3
47.5°	8.8
50°	7.0
52.5°	5.3
55°	3.5
57.5°	1.8
60°	1.8
62.5°	1.8
65°	1.8
67.5°	1.8



TEST NUMBER: P263951

CATALOG NUMBER: LD2B20D010 EU2B2010SP158027 2LBD\*LI

**CANDELA DISTRIBUTION (continued):**

	0°
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







70°		0.0
72.5°		0.0



(END OF REPORT)