

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P264635

Luminaire Tested: **LD2B20D010 EU2B2010SP158027 2LBLC\**MW***

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P264635  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1711-432-2)  
Test Lab: INNOVATION CENTER(G3)  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LD2B20D010 EU2B2010SP158027 2LBLC\*MW  
Description: 2000 Lumen, 2inch Portfolio LED Downlight  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1801.0 lumens  
Efficiency: N/A  
Efficacy: 86.2 lumens/watt  
Spacing Criteria (0/90/45): 0.31 / 0.31 / 0.32  
Luminous Opening: Circular (Dia: 0.17' x H: 0')  
CIE Type: Direct


Input Watts (W): 20.9  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P264635

CATALOG NUMBER: LD2B20D010 EU2B2010SP158027 2LBLC\*MW

### Luminous Intensity Polar Plot

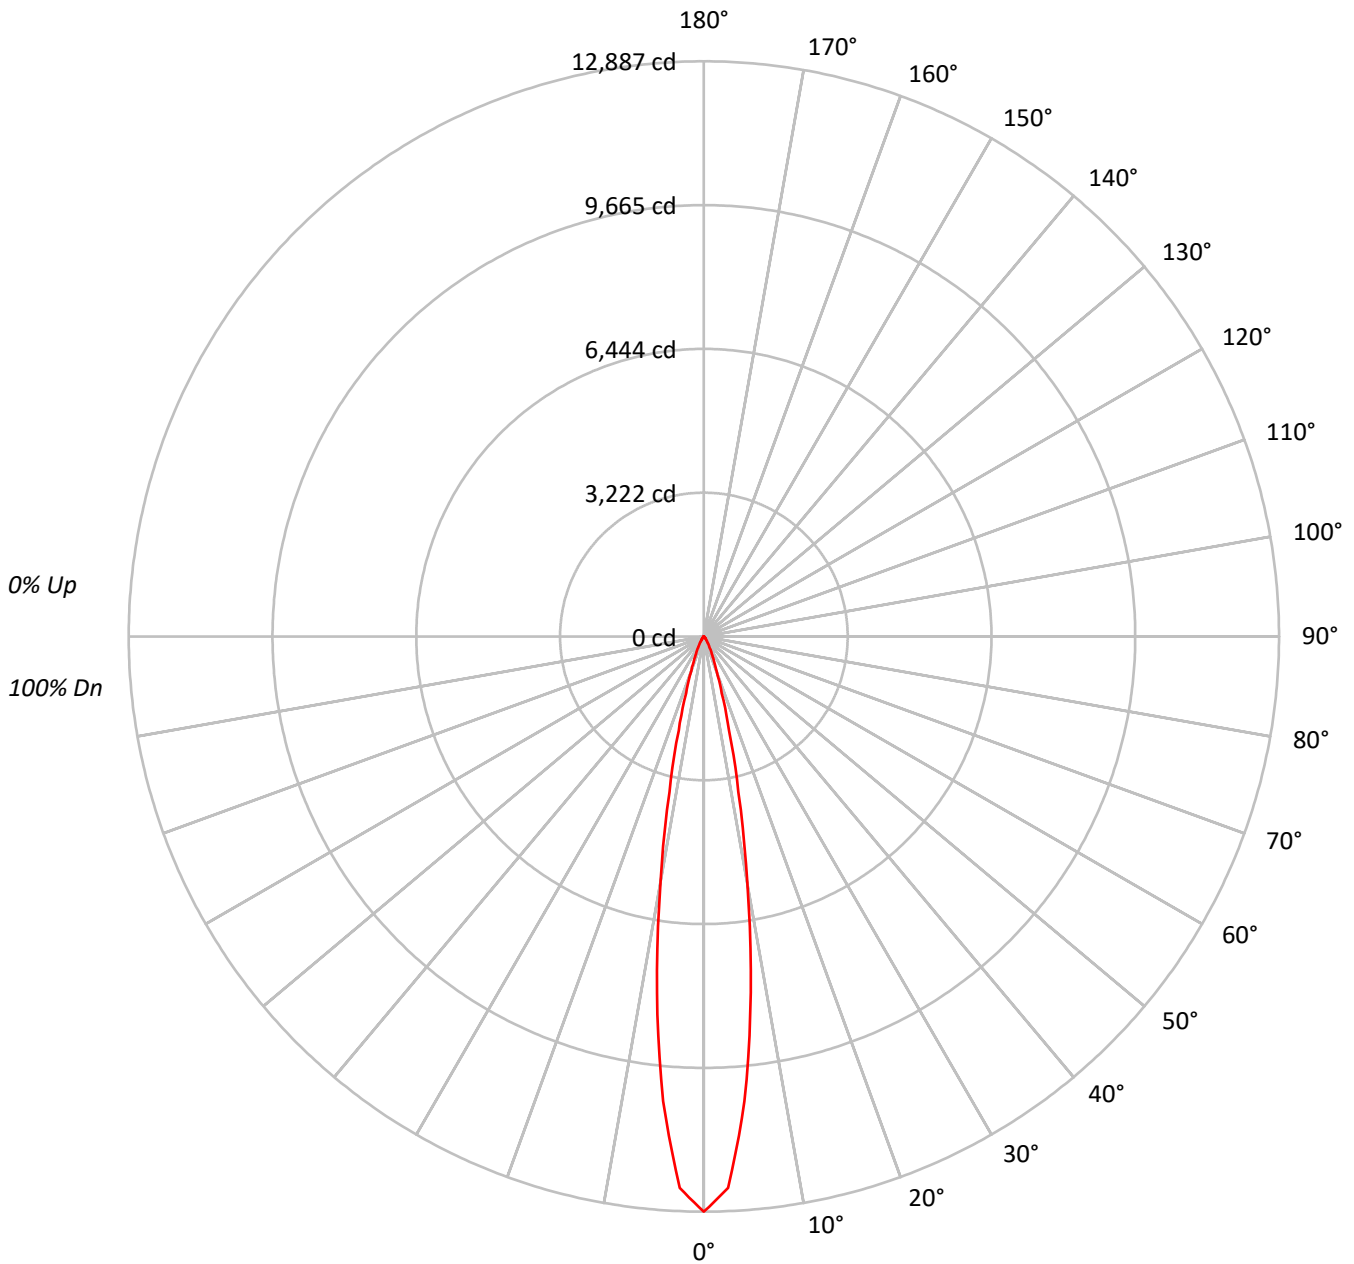



TEST NUMBER: P264635

CATALOG NUMBER: LD2B20D010 EU2B2010SP158027 2LBLC\*MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	115	113	111	110	113	111	110	108	107	106	105	104	103	102	100	99	99	97	97	97	97
2	112	108	106	103	110	107	104	102	104	102	100	101	99	98	98	97	96	94	94	94	94
3	109	104	101	98	107	103	100	97	100	98	96	98	96	94	96	94	93	92	92	92	92
4	105	100	97	94	104	99	96	93	97	95	92	96	93	91	94	92	90	89	89	89	89
5	103	97	93	91	101	96	93	90	95	92	89	93	91	89	92	90	88	87	87	87	87
6	100	94	90	88	99	94	90	87	92	89	87	91	88	86	90	88	86	85	85	85	85
7	98	92	88	85	97	91	88	85	90	87	85	89	86	84	88	86	84	83	83	83	83
8	95	89	86	83	94	89	85	83	88	85	82	87	84	82	86	84	82	81	81	81	81
9	93	87	83	81	92	87	83	81	86	83	81	85	82	80	85	82	80	79	79	79	79
10	91	85	82	79	91	85	81	79	84	81	79	84	81	79	83	80	78	78	78	78	78

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	6357904
5°	5174681
10°	2795227
15°	1114542
20°	446901
25°	213990
30°	110975
35°	58662
40°	32524
45°	20164
50°	13816
55°	9290
60°	7104
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P264635

CATALOG NUMBER: LD2B20D010 EU2B2010SP158027 2LBLC\*MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	840.3	46.7
10°-20°	663.0	36.8
20°-30°	195.6	10.9
30°-40°	65.1	3.6
40°-50°	24.5	1.4
50°-60°	10.8	0.6
60°-70°	1.7	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1698.9	94.3
0°-40°	1764.0	97.9
0°-60°	1799.2	99.9
0°-90°	1801.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1801.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	12887	
5°	10449	840
15°	2182	663
25°	393	196
35°	97	65
45°	29	24
55°	11	11
65°	0	2
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P264635

CATALOG NUMBER: LD2B20D010 EU2B2010SP158027 2LBLC\*MW

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	12886.9
2.5°	12367.5
5°	10448.7
7.5°	8050.2
10°	5579.6
12.5°	3570.7
15°	2182.1
17.5°	1330.9
20°	851.2
22.5°	569.9
25°	393.1
27.5°	277.7
30°	194.8
32.5°	137.1
35°	97.4
37.5°	68.5
40°	50.5
42.5°	39.7
45°	28.9
47.5°	25.2
50°	18.0
52.5°	14.4
55°	10.8
57.5°	10.8
60°	7.2
62.5°	3.6
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)