

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P225006

Luminaire Tested: **LD2B20D010 EU2B20FL408027 2LBDL*LI**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P225006
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (152)
Test Lab: INNOVATION CENTER-P2
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD2B20D010 EU2B20FL408027 2LBDL*LI
Description: 2000 Lumen, 2inch Portfolio LED Downlight
FLOOD OPTIC
LENSED SPUN ROUND TRIM WITH LI FINISH
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1722.5 lumens
Efficiency: N/A
Efficacy: 82.4 lumens/watt
Spacing Criteria (0/90/45): 0.59 / 0.59 / 0.58
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 20.9
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P225006

CATALOG NUMBER: LD2B20D010 EU2B20FL408027 2LBDL*LI

Luminous Intensity Polar Plot

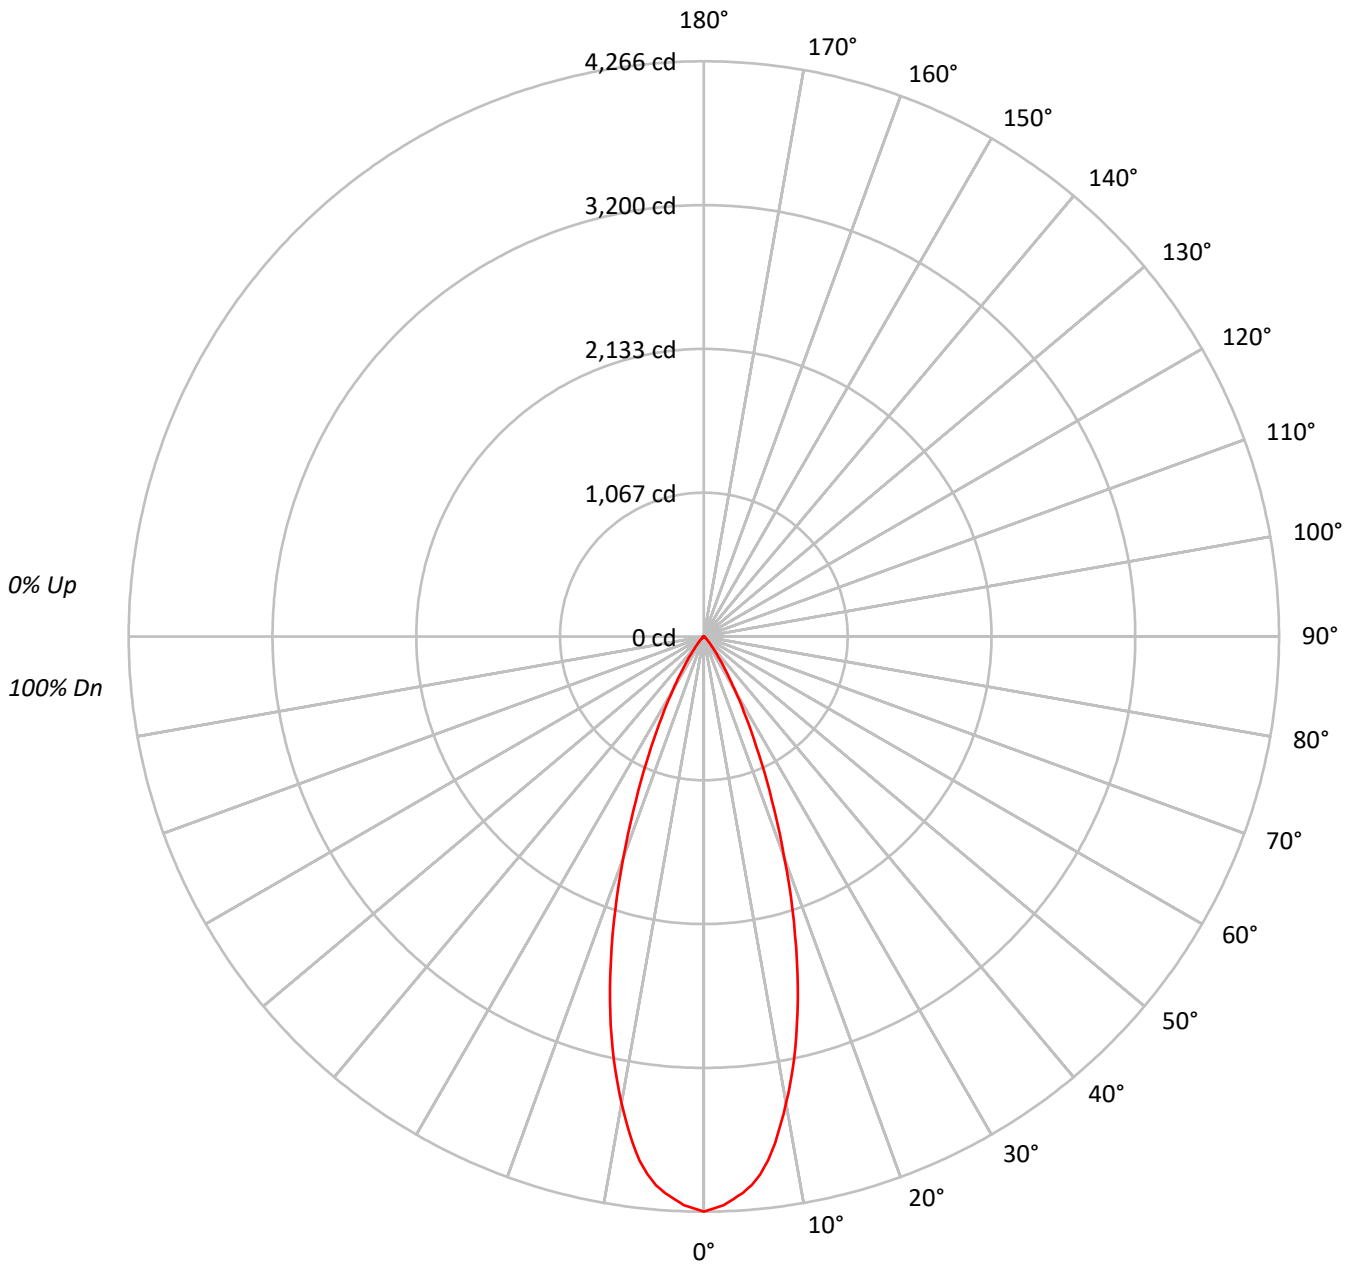



TEST NUMBER: P225006

CATALOG NUMBER: LD2B20D010 EU2B20FL408027 2LBDL*LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	114	112	110	108	112	110	108	106	106	105	103	102	101	100	99	98	97	96			96
2	110	106	103	100	108	104	101	99	101	99	97	98	96	95	96	94	93	91			91
3	106	101	96	93	104	99	95	92	97	94	91	94	92	90	92	90	88	87			87
4	102	96	91	88	100	95	90	87	93	89	86	91	88	85	89	86	84	83			83
5	98	91	86	83	97	90	86	83	89	85	82	87	84	81	86	83	81	79			79
6	94	87	82	79	93	86	82	79	85	81	78	84	80	78	83	79	77	76			76
7	91	83	79	75	90	83	78	75	82	78	75	81	77	74	80	76	74	73			73
8	88	80	75	72	87	80	75	72	79	74	71	78	74	71	77	73	71	70			70
9	85	77	72	69	84	76	72	69	76	71	69	75	71	68	74	71	68	67			67
10	82	74	69	66	81	74	69	66	73	69	66	72	68	66	72	68	66	65			65

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1652341
5°	1587847
10°	1382210
15°	1079319
20°	717814
25°	411020
30°	204357
35°	93910
40°	37670
45°	17255
50°	7954
55°	4457
60°	2556
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P225006

CATALOG NUMBER: LD2B20D010 EU2B20FL408027 2LBDL*LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	371.7	21.6
10°-20°	729.9	42.4
20°-30°	451.7	26.2
30°-40°	135.2	7.8
40°-50°	27.1	1.6
50°-60°	6.6	0.4
60°-70°	0.4	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1553.2	90.2
0°-40°	1688.4	98.0
0°-60°	1722.1	100.0
0°-90°	1722.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1722.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4266	
5°	4084	372
15°	2692	730
25°	962	452
35°	199	135
45°	32	27
55°	7	7
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P225006

CATALOG NUMBER: LD2B20D010 EU2B20FL408027 2LBDL*LI

CANDELA DISTRIBUTION (FULL):

	0°
0°	4265.8
1°	4242.6
2°	4221.1
3°	4178.0
4°	4138.3
5°	4083.7
6°	4009.2
7°	3914.8
8°	3794.0
9°	3656.6
10°	3514.2
11°	3366.9
12°	3209.7
13°	3045.8
14°	2870.3
15°	2691.5
17.5°	2219.8
20°	1741.4
22.5°	1317.6
25°	961.7
27.5°	675.4
30°	456.9
32.5°	301.3
35°	198.6
37.5°	124.1
40°	74.5
42.5°	48.0
45°	31.5
47.5°	19.9
50°	13.2
52.5°	9.9
55°	6.6
57.5°	5.0
60°	3.3
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0



TEST NUMBER: P225006

CATALOG NUMBER: LD2B20D010 EU2B20FL408027 2LBDL*LI

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







85°		0.0
87.5°		0.0



(END OF REPORT)