

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P223487

Luminaire Tested: **LD2B20D010 EU2B20NFL258027 2LBDLC*MMS**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P223487
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (155)
Test Lab: INNOVATION CENTER-P2
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD2B20D010 EU2B20NFL258027 2LBDLC*MMS
Description: 2000 Lumen, 2inch Portfolio LED Downlight
NARROW FLOOD OPTIC
LENSED CAST ROUND TRIM WITH MATTE METALLIC SILVER
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1695.8 lumens
Efficiency: N/A
Efficacy: 81.1 lumens/watt
Spacing Criteria (0/90/45): 0.39 / 0.39 / 0.35
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 20.9
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P223487

CATALOG NUMBER: LD2B20D010 EU2B20NFL258027 2LBDLC*MMS

Luminous Intensity Polar Plot

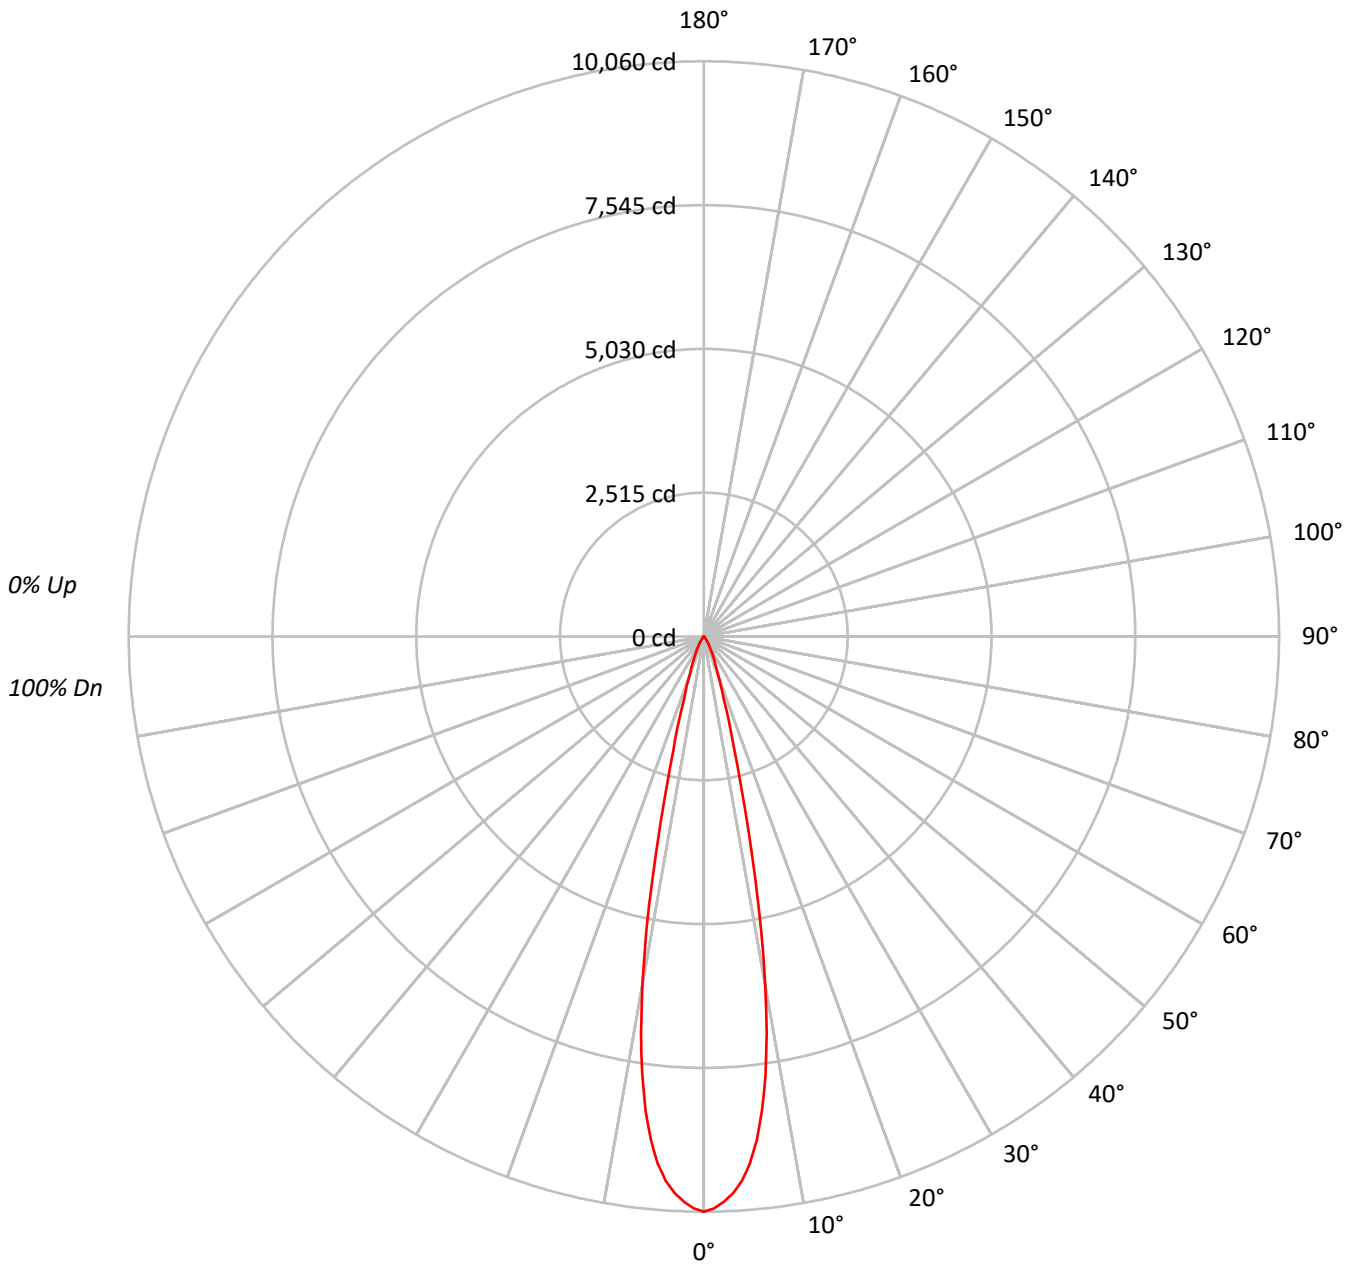



TEST NUMBER: P223487

CATALOG NUMBER: LD2B20D010 EU2B20NFL258027 2LBDLC*MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

| | | | | | | | | | | | | | | | | | | | | | |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| RF | 20 | | | | 20 | | | | 20 | | | | 20 | | | | 20 | | | | 20 |
| RC | 80 | | | | 70 | | | | 50 | | | | 30 | | | | 10 | | | | 0 |
| RW | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 0 |
| RCR | | | | | | | | | | | | | | | | | | | | | |
| 0 | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 | 100 | 100 | 100 |
| 1 | 115 | 113 | 112 | 110 | 113 | 111 | 110 | 108 | 107 | 106 | 105 | 104 | 103 | 102 | 100 | 100 | 99 | 97 | 97 | 97 | 97 |
| 2 | 112 | 109 | 106 | 104 | 110 | 107 | 104 | 102 | 104 | 102 | 100 | 101 | 99 | 98 | 98 | 97 | 96 | 95 | 95 | 95 | 95 |
| 3 | 109 | 105 | 101 | 99 | 107 | 103 | 100 | 98 | 101 | 98 | 96 | 99 | 97 | 95 | 96 | 95 | 93 | 92 | 92 | 92 | 92 |
| 4 | 106 | 101 | 97 | 95 | 104 | 100 | 97 | 94 | 98 | 95 | 93 | 96 | 94 | 92 | 95 | 93 | 91 | 90 | 90 | 90 | 90 |
| 5 | 103 | 98 | 94 | 91 | 102 | 97 | 94 | 91 | 95 | 92 | 90 | 94 | 91 | 89 | 93 | 90 | 89 | 88 | 88 | 88 | 88 |
| 6 | 101 | 95 | 91 | 89 | 99 | 94 | 91 | 88 | 93 | 90 | 88 | 92 | 89 | 87 | 91 | 88 | 87 | 86 | 86 | 86 | 86 |
| 7 | 98 | 92 | 89 | 86 | 97 | 92 | 88 | 86 | 91 | 88 | 85 | 90 | 87 | 85 | 89 | 86 | 85 | 84 | 84 | 84 | 84 |
| 8 | 96 | 90 | 86 | 84 | 95 | 90 | 86 | 84 | 89 | 86 | 83 | 88 | 85 | 83 | 87 | 85 | 83 | 82 | 82 | 82 | 82 |
| 9 | 94 | 88 | 84 | 82 | 93 | 88 | 84 | 82 | 87 | 84 | 82 | 86 | 83 | 81 | 85 | 83 | 81 | 80 | 80 | 80 | 80 |
| 10 | 92 | 86 | 82 | 80 | 91 | 86 | 82 | 80 | 85 | 82 | 80 | 84 | 82 | 80 | 84 | 81 | 79 | 79 | 79 | 79 | 79 |

AVERAGE LUMINANCE (cd/sqm):

| | |
|-----|---------|
| | 0° |
| 0° | 3896894 |
| 5° | 3598114 |
| 10° | 2435446 |
| 15° | 828567 |
| 20° | 304331 |
| 25° | 161339 |
| 30° | 82924 |
| 35° | 38680 |
| 40° | 12692 |
| 45° | 6409 |
| 50° | 3013 |
| 55° | 1148 |
| 60° | 1317 |
| 65° | 0 |
| 70° | 0 |
| 75° | 0 |
| 80° | 0 |
| 85° | 0 |



TEST NUMBER: P223487

CATALOG NUMBER: LD2B20D010 EU2B20NFL258027 2LBDLC*MMS

ZONAL LUMENS:

| Zone | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10° | 787.2 | 46.4 |
| 10°-20° | 661.8 | 39.0 |
| 20°-30° | 181.6 | 10.7 |
| 30°-40° | 53.0 | 3.1 |
| 40°-50° | 9.8 | 0.6 |
| 50°-60° | 2.2 | 0.1 |
| 60°-70° | 0.2 | 0.0 |
| 70°-80° | 0.0 | 0.0 |
| 80°-90° | 0.0 | 0.0 |
| 90°-100° | 0.0 | 0.0 |
| 100°-110° | 0.0 | 0.0 |
| 110°-120° | 0.0 | 0.0 |
| 120°-130° | 0.0 | 0.0 |
| 130°-140° | 0.0 | 0.0 |
| 140°-150° | 0.0 | 0.0 |
| 150°-160° | 0.0 | 0.0 |
| 160°-170° | 0.0 | 0.0 |
| 170°-180° | 0.0 | 0.0 |
| 0°-30° | 1630.6 | 96.2 |
| 0°-40° | 1683.6 | 99.3 |
| 0°-60° | 1695.6 | 100.0 |
| 0°-90° | 1695.8 | 100.0 |
| 90°-120° | 0.0 | 0.0 |
| 90°-150° | 0.0 | 0.0 |
| 90°-180° | 0.0 | 0.0 |
| 0°-180° | 1695.8 | 100.0 |

CANDELA DISTRIBUTION:

| | 0° | Flux |
|-----|-------|------|
| 0° | 10060 | |
| 5° | 9254 | 787 |
| 15° | 2066 | 662 |
| 25° | 378 | 182 |
| 35° | 82 | 53 |
| 45° | 12 | 10 |
| 55° | 2 | 2 |
| 65° | 0 | 0 |
| 75° | 0 | 0 |
| 85° | 0 | 0 |
| 90° | 0 | |



TEST NUMBER: P223487

CATALOG NUMBER: LD2B20D010 EU2B20NFL258027 2LBDLC*MMS

CANDELA DISTRIBUTION (FULL):

| | 0° |
|-------|---------|
| 0° | 10060.5 |
| 1° | 10002.1 |
| 2° | 9898.5 |
| 3° | 9749.9 |
| 4° | 9546.1 |
| 5° | 9253.8 |
| 6° | 8854.5 |
| 7° | 8355.1 |
| 8° | 7745.4 |
| 9° | 7025.5 |
| 10° | 6192.0 |
| 11° | 5278.3 |
| 12° | 4327.9 |
| 13° | 3420.9 |
| 14° | 2647.5 |
| 15° | 2066.2 |
| 17.5° | 1165.9 |
| 20° | 738.3 |
| 22.5° | 526.2 |
| 25° | 377.5 |
| 27.5° | 267.3 |
| 30° | 185.4 |
| 32.5° | 130.3 |
| 35° | 81.8 |
| 37.5° | 33.4 |
| 40° | 25.1 |
| 42.5° | 18.4 |
| 45° | 11.7 |
| 47.5° | 6.7 |
| 50° | 5.0 |
| 52.5° | 3.3 |
| 55° | 1.7 |
| 57.5° | 1.7 |
| 60° | 1.7 |
| 62.5° | 0.0 |
| 65° | 0.0 |
| 67.5° | 0.0 |
| 70° | 0.0 |
| 72.5° | 0.0 |
| 75° | 0.0 |
| 77.5° | 0.0 |
| 80° | 0.0 |
| 82.5° | 0.0 |



TEST NUMBER: P223487

CATALOG NUMBER: LD2B20D010 EU2B20NFL258027 2LBDLC*MMS

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







| | | |
|-------|--|-----|
| 85° | | 0.0 |
| 87.5° | | 0.0 |



(END OF REPORT)