

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P#

Luminaire Tested: **LD2B20D010 EU2B20WFL558027 2LBDSQLC*MW**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P#
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14810)
Test Lab: INNOVATION CENTER (G1)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD2B20D010 EU2B20WFL558027 2LBDSQLC*MW
Description: 2000 Lumen, 2inch Portfolio LED Downlight
WIDE FLOOD OPTIC
LENSED SQUARE CAST TRIM WITH MATTE WHITE FINISH
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1526.4 lumens
Efficiency: N/A
Efficacy: 73.0 lumens/watt
Spacing Criteria (0/90/45): 0.79 / 0.79 / 0.84
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')
CIE Type: Direct

Input Watts (W): 20.9
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P#
CATALOG NUMBER: LD2B20D010 EU2B20WFL558027 2LBDSQLC*MW

Luminous Intensity Polar Plot

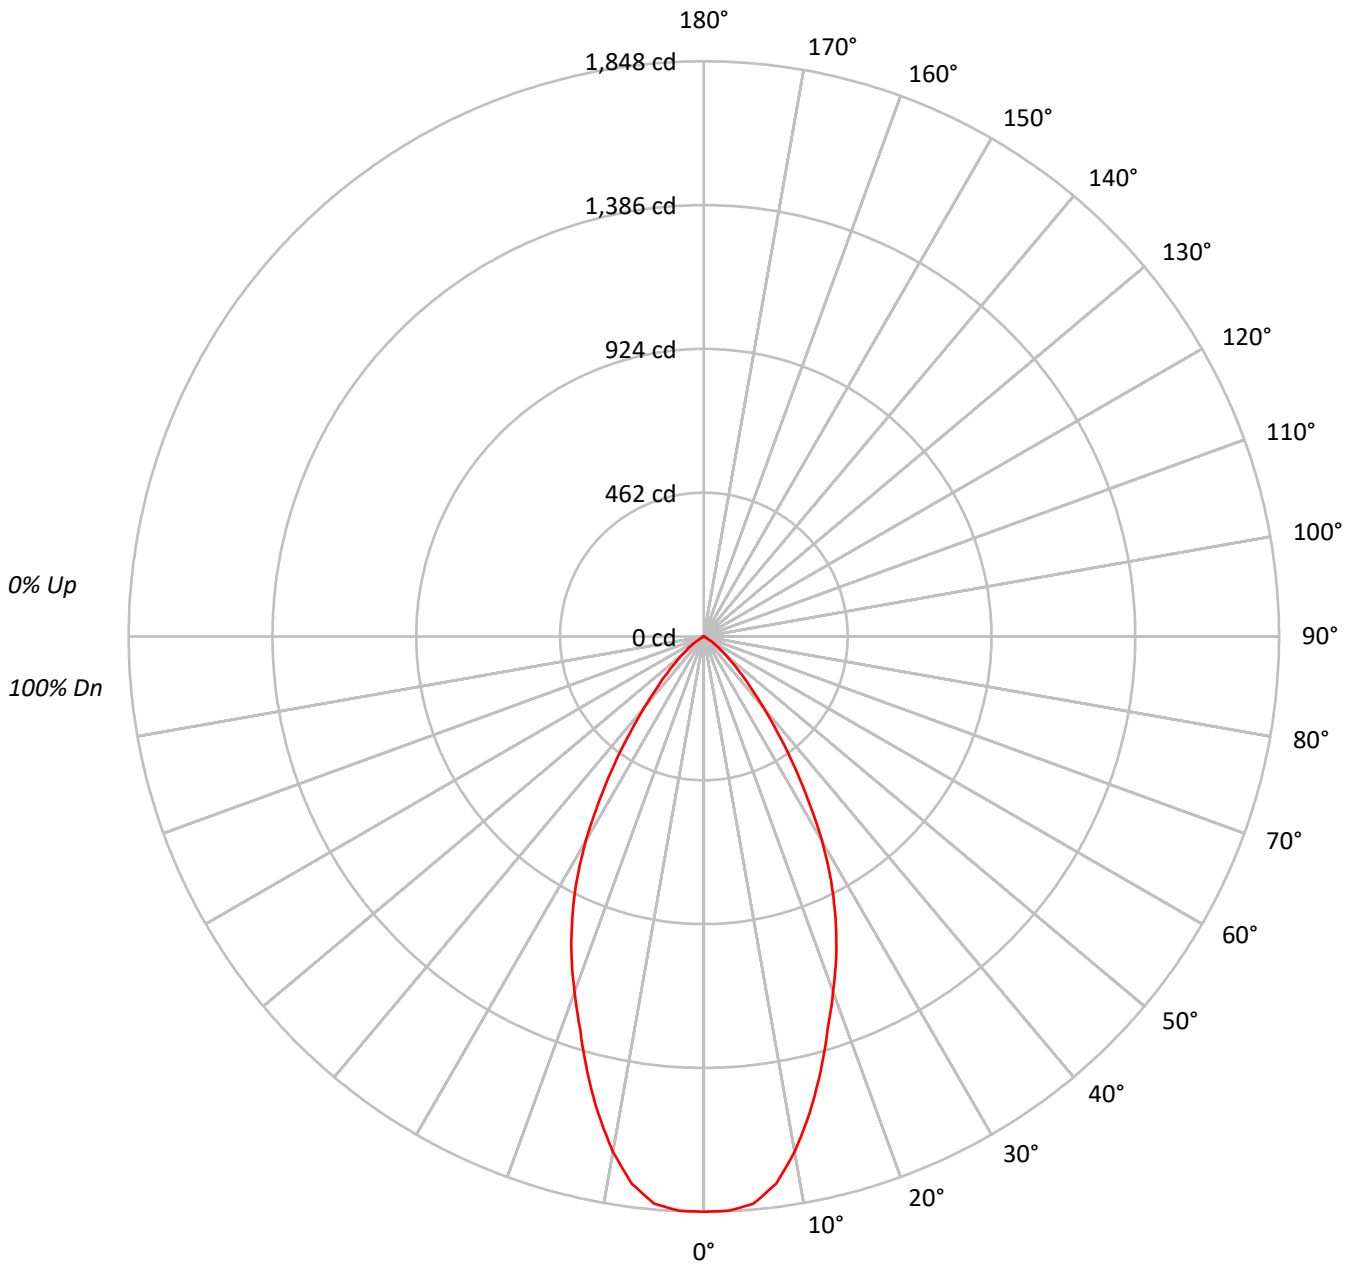



TEST NUMBER: P#

CATALOG NUMBER: LD2B20D010 EU2B20WFL558027 2LBDSQLC*MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	110	108	106	111	108	106	104	104	102	101	101	99	98	97	96	95	93			
2	108	102	98	95	105	101	97	94	98	94	92	95	92	90	92	90	88	86			
3	102	95	90	86	100	94	89	85	91	87	84	89	85	83	87	84	81	80			
4	97	89	83	79	95	88	82	78	85	81	77	83	80	76	82	78	76	74			
5	91	83	77	72	90	82	76	72	80	75	71	78	74	71	77	73	70	69			
6	87	78	71	67	85	77	71	67	75	70	66	74	69	66	73	69	65	64			
7	82	73	67	62	81	72	66	62	71	66	62	70	65	62	69	64	61	60			
8	78	69	62	58	77	68	62	58	67	62	58	66	61	58	65	61	57	56			
9	74	65	59	55	73	64	58	54	63	58	54	62	57	54	61	57	54	53			
10	71	61	55	51	70	61	55	51	60	55	51	59	54	51	58	54	51	49			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	715970
5°	711395
10°	661370
15°	580582
20°	500499
25°	427987
30°	339656
35°	236762
40°	149772
45°	91426
50°	54054
55°	29579
60°	6430
65°	5774
70°	4757
75°	6286
80°	4684
85°	9333



TEST NUMBER: P#

CATALOG NUMBER: LD2B20D010 EU2B20WFL558027 2LBDSQLC*MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	169.8	11.1
10°-20°	403.2	26.4
20°-30°	454.9	29.8
30°-40°	314.7	20.6
40°-50°	134.1	8.8
50°-60°	38.8	2.5
60°-70°	5.7	0.4
70°-80°	3.6	0.2
80°-90°	1.4	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1028.0	67.3
0°-40°	1342.7	88.0
0°-60°	1515.6	99.3
0°-90°	1526.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1526.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1848	
5°	1830	170
15°	1448	403
25°	1001	455
35°	501	315
45°	167	134
55°	44	39
65°	6	6
75°	4	4
85°	2	1
90°	0	



TEST NUMBER: P#

CATALOG NUMBER: LD2B20D010 EU2B20WFL558027 2LBDSQLC*MW

CANDELA DISTRIBUTION (FULL):

0°	
0°	1848.4
2.5°	1846.3
5°	1829.6
7.5°	1773.3
10°	1681.5
12.5°	1568.8
15°	1447.8
17.5°	1322.7
20°	1214.2
22.5°	1112.0
25°	1001.4
27.5°	884.6
30°	759.4
32.5°	623.8
35°	500.7
37.5°	388.0
40°	296.2
42.5°	223.2
45°	166.9
47.5°	121.0
50°	89.7
52.5°	64.7
55°	43.8
57.5°	18.8
60°	8.3
62.5°	6.3
65°	6.3
67.5°	4.2
70°	4.2
72.5°	4.2
75°	4.2
77.5°	2.1
80°	2.1
82.5°	2.1
85°	2.1
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)