

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P264007

Luminaire Tested: **LD2B20D010 EU2B2010SP158030 2LBD*WH**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P264007
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-1805-787-1)
Test Lab: INNOVATION CENTER(G2)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD2B20D010 EU2B2010SP158030 2LBD*WH
Description: 2000 Lumen, 2inch Portfolio LED Downlight
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1749.0 lumens
Efficiency: N/A
Efficacy: 83.7 lumens/watt
Spacing Criteria (0/90/45): 0.28 / 0.28 / 0.28
Luminous Opening: Circular (Dia: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 20.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P264007

CATALOG NUMBER: LD2B20D010 EU2B2010SP158030 2LBD*WH

Luminous Intensity Polar Plot

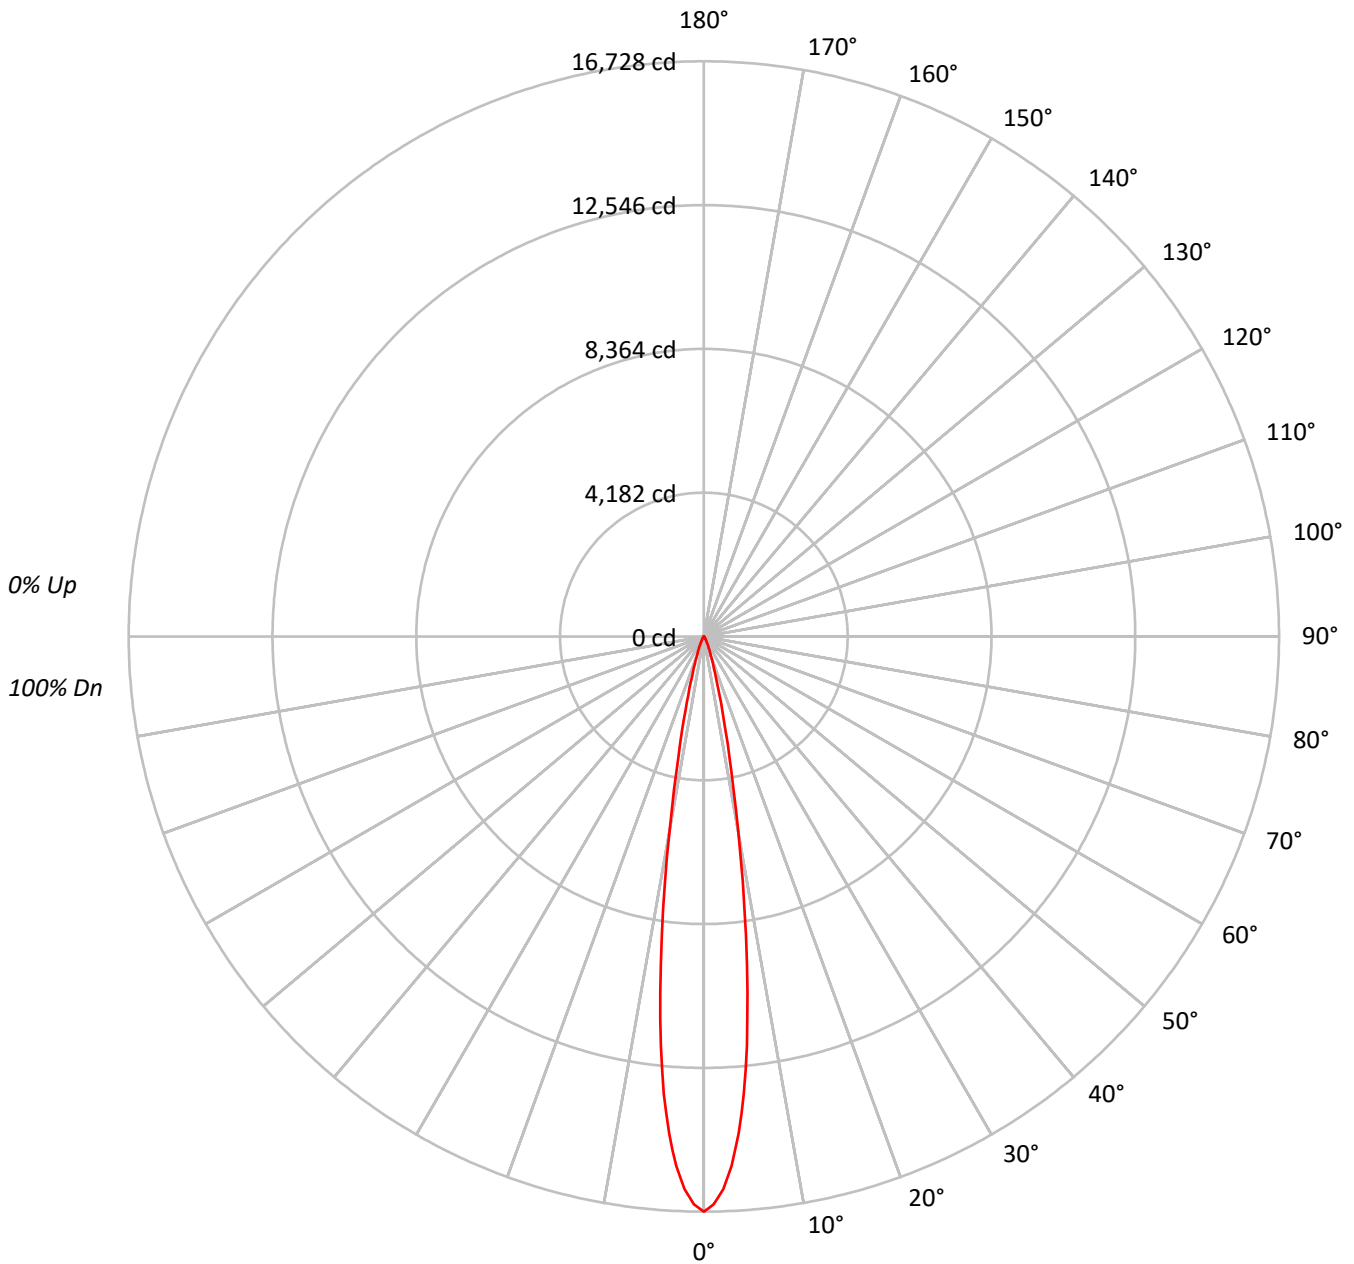



TEST NUMBER: P264007

CATALOG NUMBER: LD2B20D010 EU2B2010SP158030 2LBD*WH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	116	114	112	111	113	112	110	109	108	107	106	104	103	102	101	100	100	98	98	98	98
2	113	109	107	105	111	108	106	104	105	103	101	102	101	99	99	98	97	96	96	96	96
3	110	106	103	100	108	105	102	100	102	100	98	100	98	97	98	96	95	94	94	94	94
4	107	103	99	97	106	102	99	96	100	97	95	98	96	94	96	95	93	92	92	92	92
5	105	100	97	94	104	99	96	94	98	95	93	96	94	92	95	93	91	90	90	90	90
6	103	98	94	92	102	97	94	91	96	93	91	95	92	90	93	91	90	89	89	89	89
7	101	95	92	90	100	95	92	89	94	91	89	93	90	89	92	90	88	87	87	87	87
8	99	93	90	88	98	93	90	88	92	89	87	91	89	87	91	88	87	86	86	86	86
9	97	92	88	86	96	91	88	86	91	88	86	90	87	86	89	87	85	85	85	85	85
10	95	90	87	85	95	90	87	85	89	86	85	89	86	84	88	86	84	83	83	83	83

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	8252857
5°	6615055
10°	2887206
15°	894759
20°	311917
25°	137779
30°	62381
35°	32403
40°	18484
45°	8791
50°	5526
55°	3097
60°	1776
65°	2101
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P264007

CATALOG NUMBER: LD2B20D010 EU2B2010SP158030 2LBD*WH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1014.3	58.0
10°-20°	555.5	31.8
20°-30°	126.6	7.2
30°-40°	36.4	2.1
40°-50°	11.2	0.6
50°-60°	3.4	0.2
60°-70°	1.6	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1696.4	97.0
0°-40°	1732.8	99.1
0°-60°	1747.5	99.9
0°-90°	1749.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1749.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	16728	
5°	13357	###
15°	1752	555
25°	253	127
35°	54	36
45°	13	11
55°	4	3
65°	2	2
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P264007

CATALOG NUMBER: LD2B20D010 EU2B2010SP158030 2LBD*WH

CANDELA DISTRIBUTION (FULL):

	0°
0°	16727.8
1°	16519.6
2°	16087.0
3°	15415.8
4°	14493.2
5°	13357.1
6°	11964.3
7°	10408.2
8°	8783.9
9°	7211.6
10°	5763.2
11°	4537.3
12°	3571.7
13°	2810.7
14°	2220.2
15°	1751.8
16°	1382.0
17°	1100.2
18°	884.8
19°	719.7
20°	594.1
22.5°	384.1
25°	253.1
26°	213.6
27°	181.3
28°	152.6
29°	127.4
30°	109.5
32.5°	75.4
35°	53.8
37.5°	39.5
40°	28.7
42.5°	19.7
45°	12.6
47.5°	9.0
50°	7.2
52.5°	5.4
55°	3.6
57.5°	1.8
60°	1.8
62.5°	1.8
65°	1.8
67.5°	1.8



TEST NUMBER: P264007

CATALOG NUMBER: LD2B20D010 EU2B2010SP158030 2LBD*WH

CANDELA DISTRIBUTION (continued):

	0°
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







70°		0.0
72.5°		0.0



(END OF REPORT)