

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P264321

Luminaire Tested: **LD2B20D010 EU2B2010SP159030 2LBD*B**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P264321
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-1805-787-1)
Test Lab: INNOVATION CENTER(G2)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD2B20D010 EU2B2010SP159030 2LBD*B
Description: 2000 Lumen, 2inch Portfolio LED Downlight
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1411.9 lumens
Efficiency: N/A
Efficacy: 67.6 lumens/watt
Spacing Criteria (0/90/45): 0.28 / 0.28 / 0.28
Luminous Opening: Circular (Dia: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 20.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P264321

CATALOG NUMBER: LD2B20D010 EU2B2010SP159030 2LBD*B

Luminous Intensity Polar Plot

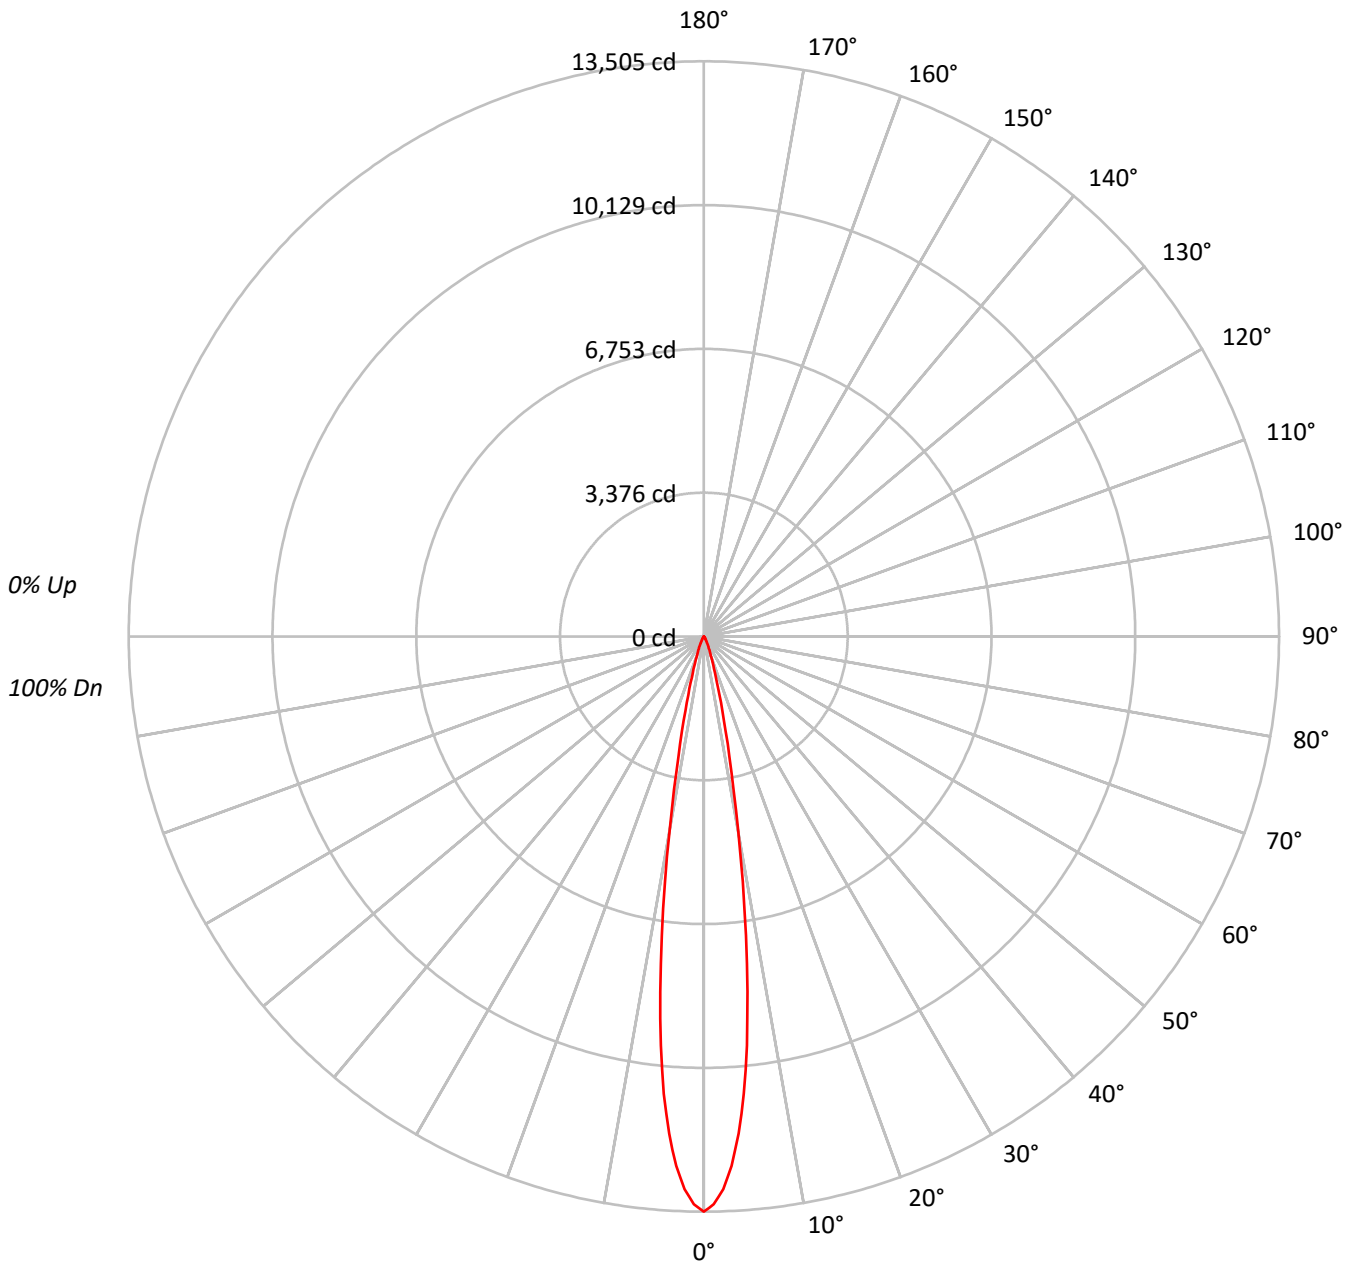



TEST NUMBER: P264321

CATALOG NUMBER: LD2B20D010 EU2B2010SP159030 2LBD*B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	116	114	112	111	113	112	110	109	108	107	106	104	103	102	101	100	100	98	98	98	98
2	113	109	107	105	111	108	106	104	105	103	101	102	101	99	99	98	97	96	96	96	96
3	110	106	103	100	108	105	102	100	102	100	98	100	98	97	98	96	95	94	94	94	94
4	107	103	99	97	106	102	99	96	100	97	95	98	96	94	96	95	93	92	92	92	92
5	105	100	97	94	104	99	96	94	98	95	93	96	94	92	95	93	91	90	90	90	90
6	103	98	94	92	102	97	94	91	96	93	91	95	92	90	93	91	90	89	89	89	89
7	101	95	92	90	100	95	92	89	94	91	89	93	90	89	92	90	88	87	87	87	87
8	99	93	90	88	98	93	90	88	92	89	87	91	89	87	91	88	87	86	86	86	86
9	97	92	88	86	96	91	88	86	91	88	86	90	87	86	89	87	85	85	85	85	85
10	95	90	87	85	95	90	87	85	89	86	85	89	86	84	88	86	84	83	83	83	83

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	6662654
5°	5340439
10°	2330876
15°	722325
20°	251802
25°	111214
30°	50360
35°	26199
40°	14942
45°	7047
50°	4452
55°	2494
60°	1381
65°	1634
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P264321

CATALOG NUMBER: LD2B20D010 EU2B2010SP159030 2LBD*B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	818.9	58.0
10°-20°	448.5	31.8
20°-30°	102.2	7.2
30°-40°	29.4	2.1
40°-50°	9.1	0.6
50°-60°	2.7	0.2
60°-70°	1.2	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1369.6	97.0
0°-40°	1399.0	99.1
0°-60°	1410.7	99.9
0°-90°	1411.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1411.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	13505	
5°	10783	819
15°	1414	448
25°	204	102
35°	44	29
45°	10	9
55°	3	3
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P264321

CATALOG NUMBER: LD2B20D010 EU2B2010SP159030 2LBD*B

CANDELA DISTRIBUTION (FULL):

	0°
0°	13504.6
1°	13336.6
2°	12987.4
3°	12445.4
4°	11700.6
5°	10783.4
6°	9659.0
7°	8402.7
8°	7091.4
9°	5822.1
10°	4652.7
11°	3663.1
12°	2883.5
13°	2269.1
14°	1792.4
15°	1414.2
16°	1115.7
17°	888.2
18°	714.4
19°	581.0
20°	479.6
22.5°	310.1
25°	204.3
26°	172.4
27°	146.3
28°	123.2
29°	102.9
30°	88.4
32.5°	60.9
35°	43.5
37.5°	31.9
40°	23.2
42.5°	15.9
45°	10.1
47.5°	7.2
50°	5.8
52.5°	4.3
55°	2.9
57.5°	1.4
60°	1.4
62.5°	1.4
65°	1.4
67.5°	1.4



TEST NUMBER: P264321

CATALOG NUMBER: LD2B20D010 EU2B2010SP159030 2LBD*B

CANDELA DISTRIBUTION (continued):

	0°
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







70°		0.0
72.5°		0.0



(END OF REPORT)