

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P264991

Luminaire Tested: **LD2B20D010 EU2B2010SP159030 2LBDL*LI**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P264991
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1711-432-2)
Test Lab: INNOVATION CENTER(G3)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD2B20D010 EU2B2010SP159030 2LBDL*LI
Description: 2000 Lumen, 2inch Portfolio LED Downlight
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1412.0 lumens
Efficiency: N/A
Efficacy: 67.6 lumens/watt
Spacing Criteria (0/90/45): 0.31 / 0.31 / 0.32
Luminous Opening: Circular (Dia: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 20.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P264991

CATALOG NUMBER: LD2B20D010 EU2B2010SP159030 2LBDL*LI

Luminous Intensity Polar Plot

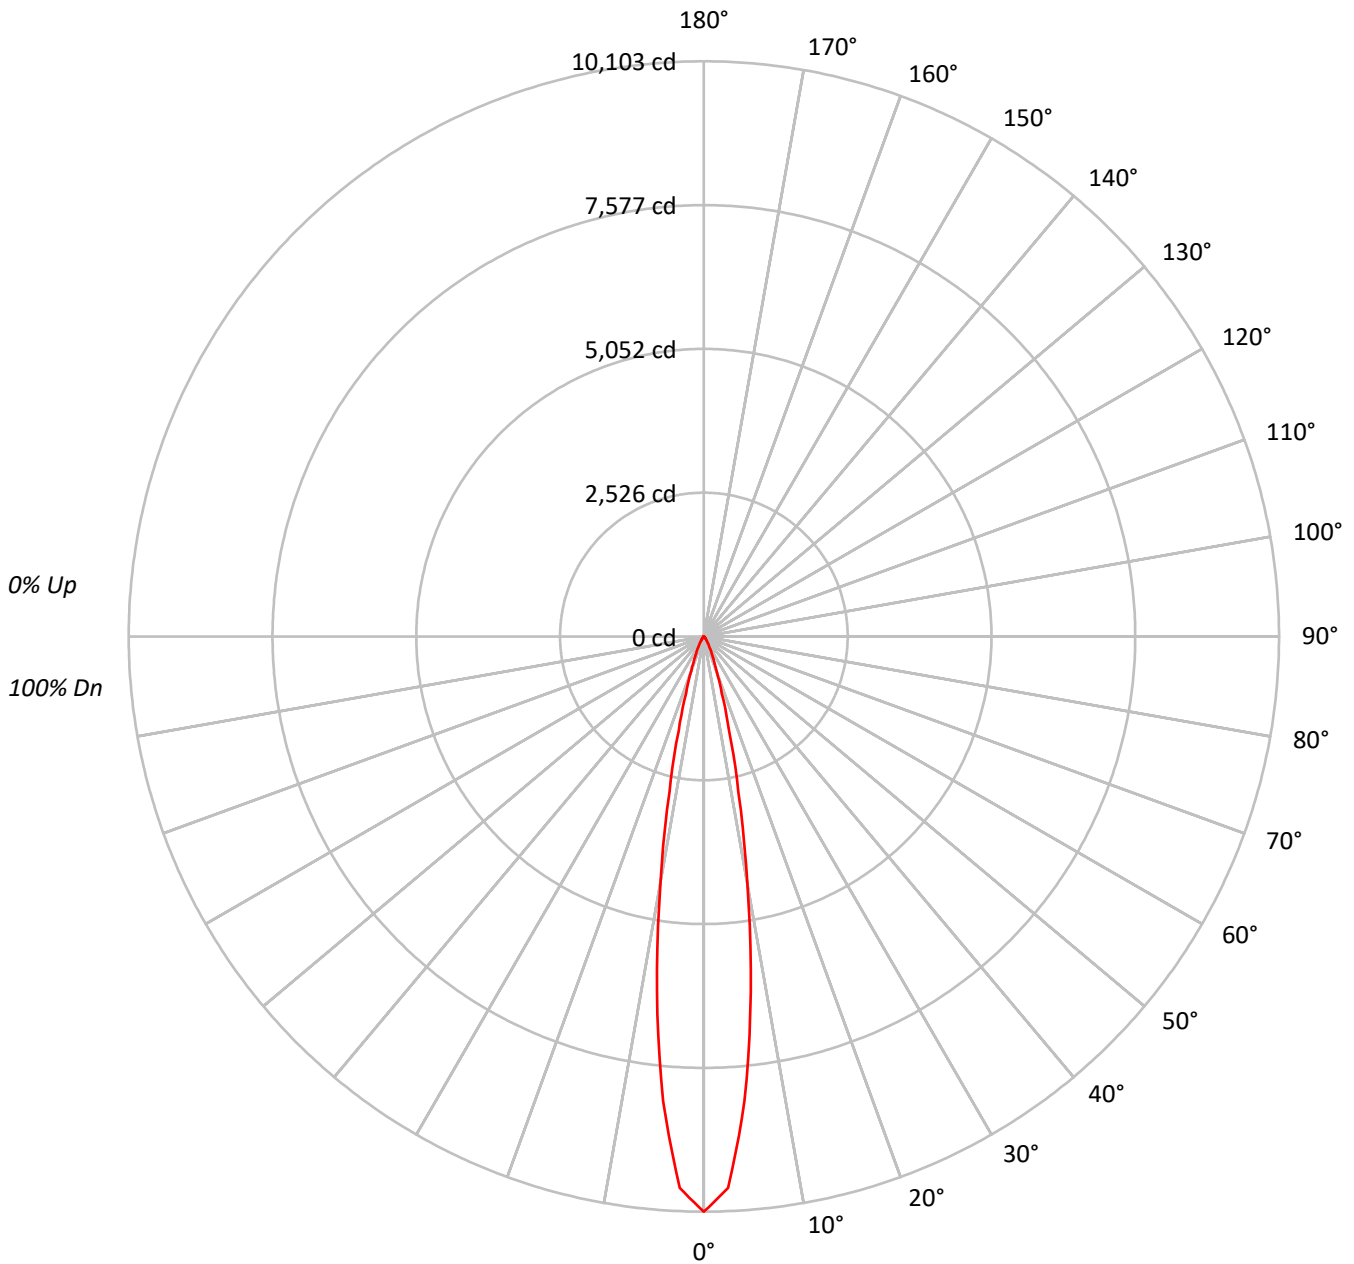

0% Up
100% Dn



TEST NUMBER: P264991

CATALOG NUMBER: LD2B20D010 EU2B2010SP159030 2LBDL*LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100																
1	115	113	111	110	113	111	110	108	107	106	105	104	103	102	100	99	99	97			97																
2	112	108	106	103	110	107	104	102	104	102	100	101	99	98	98	97	96	94			94																
3	109	104	101	98	107	103	100	97	100	98	96	98	96	94	96	94	93	92			92																
4	105	100	97	94	104	99	96	93	97	95	92	96	93	91	94	92	90	89			89																
5	103	97	93	91	101	96	93	90	95	92	89	93	91	89	92	90	88	87			87																
6	100	94	90	88	99	94	90	87	92	89	87	91	88	86	90	88	86	85			85																
7	98	92	88	85	97	91	88	85	90	87	85	89	86	84	88	86	84	83			83																
8	95	89	86	83	94	89	85	83	88	85	82	87	84	82	86	84	82	81			81																
9	93	87	83	81	92	87	83	81	86	83	81	85	82	80	85	82	80	79			79																
10	91	85	82	79	91	85	81	79	84	81	79	84	81	79	83	80	78	78			78																

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	4984631
5°	4057009
10°	2191505
15°	873818
20°	350349
25°	167773
30°	86991
35°	45954
40°	25504
45°	15768
50°	10822
55°	7311
60°	5624
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P264991

CATALOG NUMBER: LD2B20D010 EU2B2010SP159030 2LBDL*LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	658.8	46.7
10°-20°	519.8	36.8
20°-30°	153.3	10.9
30°-40°	51.0	3.6
40°-50°	19.2	1.4
50°-60°	8.5	0.6
60°-70°	1.4	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1331.9	94.3
0°-40°	1382.9	97.9
0°-60°	1410.6	99.9
0°-90°	1412.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1412.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	10103	
5°	8192	659
15°	1711	520
25°	308	153
35°	76	51
45°	23	19
55°	8	9
65°	0	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P264991

CATALOG NUMBER: LD2B20D010 EU2B2010SP159030 2LBDL*LI

CANDELA DISTRIBUTION (FULL):

	0°
0°	10103.4
2.5°	9696.2
5°	8191.9
7.5°	6311.5
10°	4374.5
12.5°	2799.4
15°	1710.8
17.5°	1043.4
20°	667.3
22.5°	446.8
25°	308.2
27.5°	217.7
30°	152.7
32.5°	107.5
35°	76.3
37.5°	53.7
40°	39.6
42.5°	31.1
45°	22.6
47.5°	19.8
50°	14.1
52.5°	11.3
55°	8.5
57.5°	8.5
60°	5.7
62.5°	2.8
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)