

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P265000

Luminaire Tested: **LD2B20D010 EU2B2010SP159030 2LBLC\*MMS**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P265000  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1711-432-2)  
Test Lab: INNOVATION CENTER(G3)  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LD2B20D010 EU2B2010SP159030 2LBLC\*MMS  
Description: 2000 Lumen, 2inch Portfolio LED Downlight  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1358.0 lumens  
Efficiency: N/A  
Efficacy: 65.0 lumens/watt  
Spacing Criteria (0/90/45): 0.31 / 0.31 / 0.32  
Luminous Opening: Circular (Dia: 0.17' x H: 0')  
CIE Type: Direct


Input Watts (W): 20.9  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P265000

CATALOG NUMBER: LD2B20D010 EU2B2010SP159030 2LBLC\*MMS

### Luminous Intensity Polar Plot

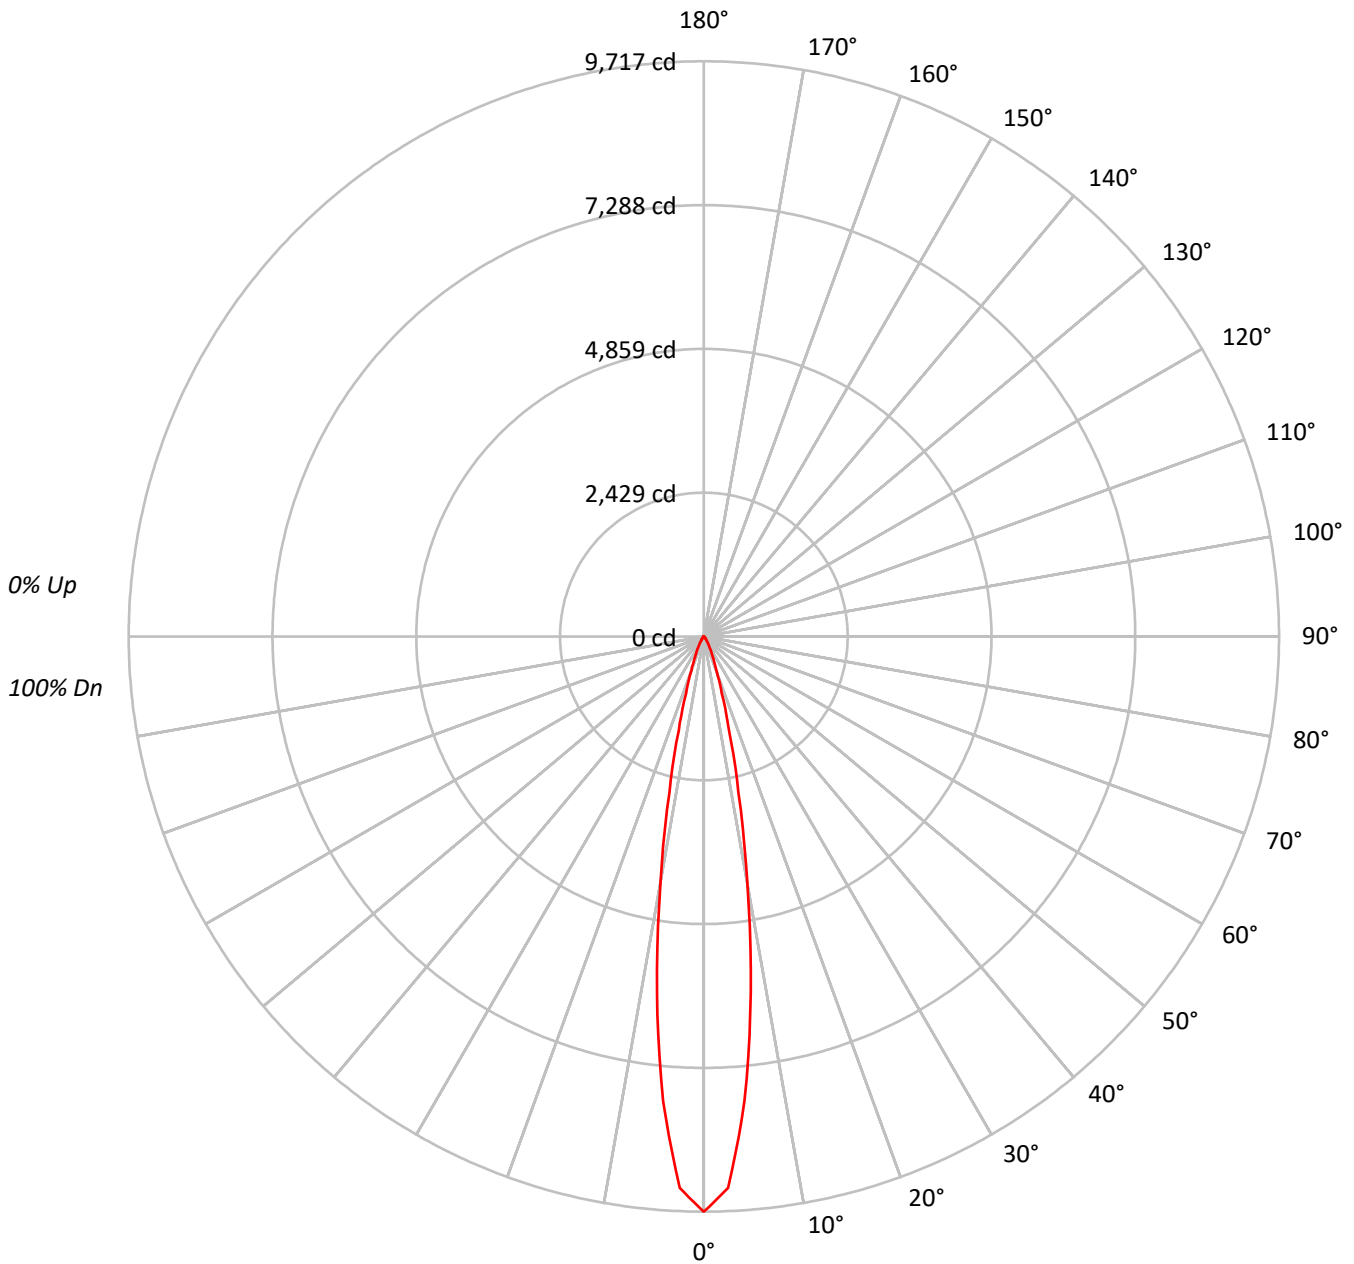



TEST NUMBER: P265000

CATALOG NUMBER: LD2B20D010 EU2B2010SP159030 2LBLC\*MMS

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									20																	
RC	80									70									50									30									10									0								
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																								
RCR																																																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																																				
1	115	113	111	110	113	111	110	108	107	106	105	104	103	102	100	99	99	97																																				
2	112	108	106	103	110	107	104	102	104	102	100	101	99	98	98	97	96	94																																				
3	109	104	101	98	107	103	100	97	100	98	96	98	96	94	96	94	93	92																																				
4	105	100	97	94	104	99	96	93	97	95	92	96	93	91	94	92	90	89																																				
5	103	97	93	91	101	96	93	90	95	92	89	93	91	89	92	90	88	87																																				
6	100	94	90	88	99	94	90	87	92	89	87	91	88	86	90	88	86	85																																				
7	98	92	88	85	97	91	88	85	90	87	85	89	86	84	88	86	84	83																																				
8	95	89	86	83	94	89	85	83	88	85	82	87	84	82	86	84	82	81																																				
9	93	87	83	81	92	87	83	81	86	83	81	85	82	80	85	82	80	79																																				
10	91	85	82	79	91	85	81	79	84	81	79	84	81	79	83	80	78	78																																				

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	4793996
5°	3901848
10°	2107692
15°	840363
20°	336961
25°	161350
30°	83687
35°	44208
40°	24538
45°	15210
50°	10438
55°	7053
60°	5328
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P265000

CATALOG NUMBER: LD2B20D010 EU2B2010SP159030 2LBLC\*MMS

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	633.6	46.7
10°-20°	499.9	36.8
20°-30°	147.5	10.9
30°-40°	49.1	3.6
40°-50°	18.4	1.4
50°-60°	8.2	0.6
60°-70°	1.3	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1281.0	94.3
0°-40°	1330.1	97.9
0°-60°	1356.7	99.9
0°-90°	1358.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1358.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	9717	
5°	7879	634
15°	1645	500
25°	296	147
35°	73	49
45°	22	18
55°	8	8
65°	0	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P265000

CATALOG NUMBER: LD2B20D010 EU2B2010SP159030 2LBLC\*MMS

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	9717.0
2.5°	9325.4
5°	7878.6
7.5°	6070.1
10°	4207.2
12.5°	2692.4
15°	1645.3
17.5°	1003.5
20°	641.8
22.5°	429.7
25°	296.4
27.5°	209.4
30°	146.9
32.5°	103.3
35°	73.4
37.5°	51.7
40°	38.1
42.5°	29.9
45°	21.8
47.5°	19.0
50°	13.6
52.5°	10.9
55°	8.2
57.5°	8.2
60°	5.4
62.5°	2.7
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)