

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P264326

Luminaire Tested: **LD2B20D010 EU2B2010SP159030 2LBSQC*MW**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P264326
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-1805-787-1)
Test Lab: INNOVATION CENTER(G2)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD2B20D010 EU2B2010SP159030 2LBSQC*MW
Description: 2000 Lumen, 2inch Portfolio LED Downlight
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1278.0 lumens
Efficiency: N/A
Efficacy: 61.1 lumens/watt
Spacing Criteria (0/90/45): 0.28 / 0.28 / 0.28
Luminous Opening: Circular (Dia: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 20.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P264326

CATALOG NUMBER: LD2B20D010 EU2B2010SP159030 2LBSQC*MW

Luminous Intensity Polar Plot

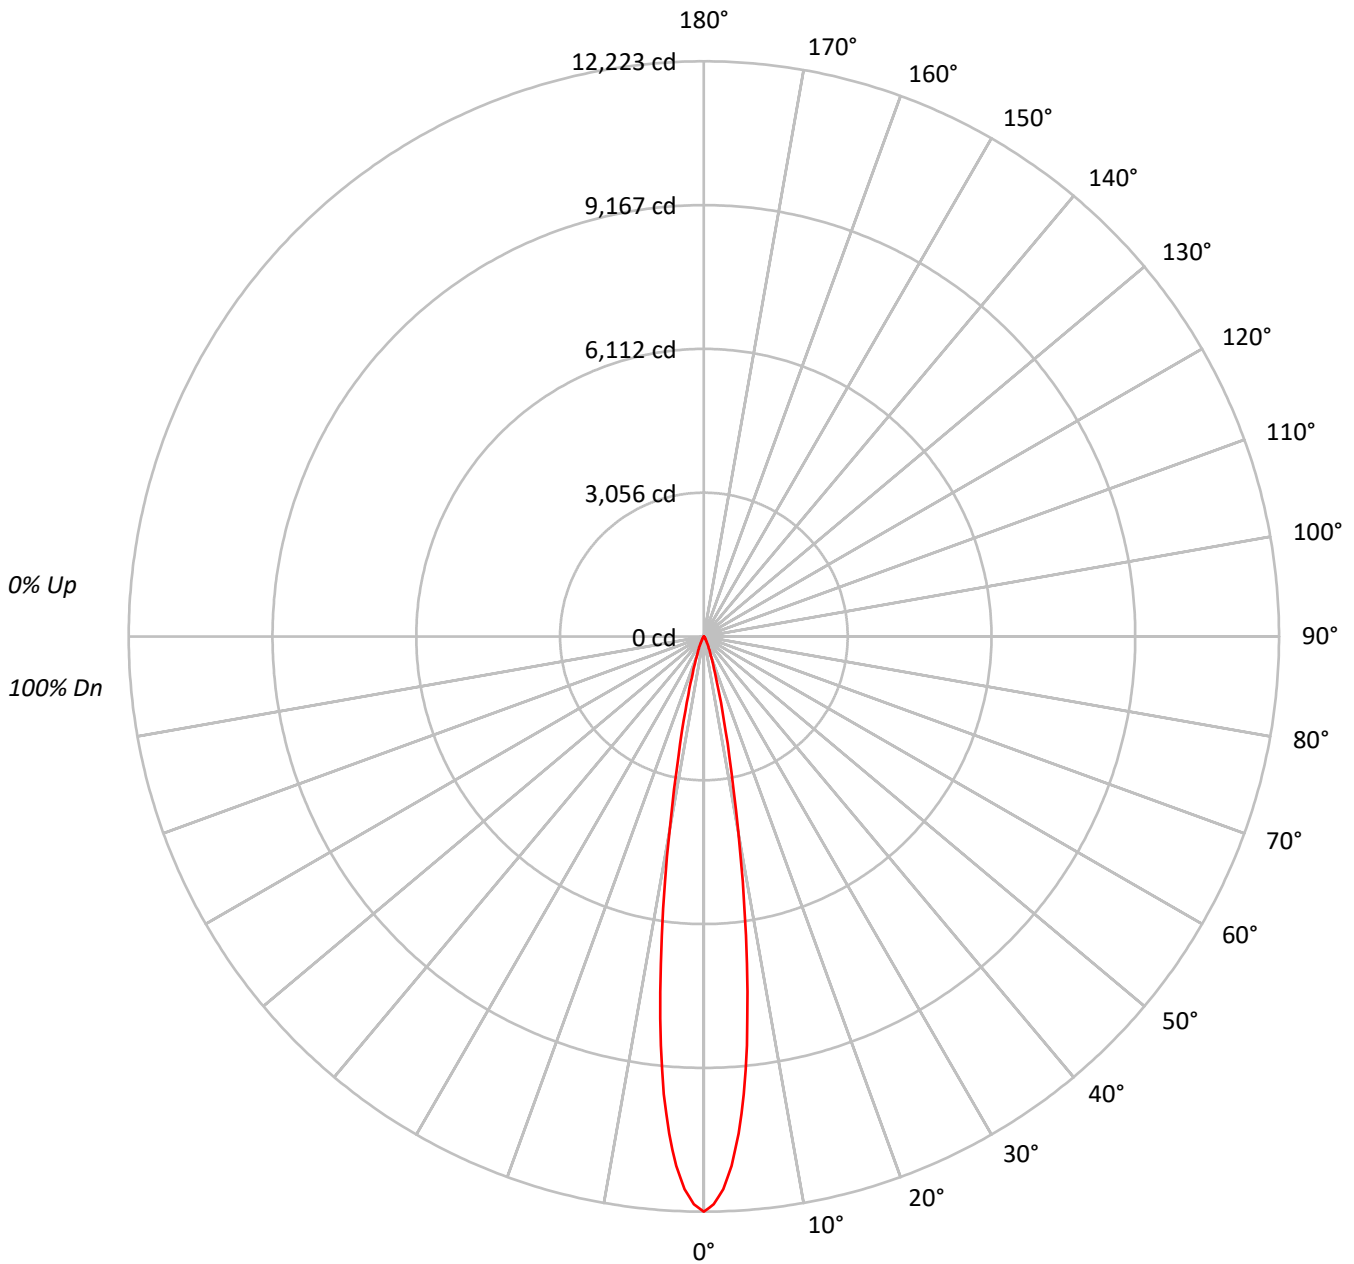



TEST NUMBER: P264326

CATALOG NUMBER: LD2B20D010 EU2B2010SP159030 2LBSQC*MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	116	114	112	111	113	112	110	109	108	107	106	104	103	102	101	100	100	98	98	98	98
2	113	109	107	105	111	108	106	104	105	103	101	102	101	99	99	98	97	96	96	96	96
3	110	106	103	100	108	105	102	100	102	100	98	100	98	97	98	96	95	94	94	94	94
4	107	103	99	97	106	102	99	96	100	97	95	98	96	94	96	95	93	92	92	92	92
5	105	100	97	94	104	99	96	94	98	95	93	96	94	92	95	93	91	90	90	90	90
6	103	98	94	92	102	97	94	91	96	93	91	95	92	90	93	91	90	89	89	89	89
7	101	95	92	90	100	95	92	89	94	91	89	93	90	89	92	90	88	87	87	87	87
8	99	93	90	88	98	93	90	88	92	89	87	91	89	87	91	88	87	86	86	86	86
9	97	92	88	86	96	91	88	86	91	88	86	90	87	86	89	87	85	85	85	85	85
10	95	90	87	85	95	90	87	85	89	86	85	89	86	84	88	86	84	83	83	83	83

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	6030361
5°	4833654
10°	2109696
15°	653780
20°	227913
25°	100653
30°	45575
35°	23670
40°	13525
45°	6419
50°	3991
55°	2236
60°	1283
65°	1518
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P264326

CATALOG NUMBER: LD2B20D010 EU2B2010SP159030 2LBSQC*MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	741.2	58.0
10°-20°	405.9	31.8
20°-30°	92.5	7.2
30°-40°	26.6	2.1
40°-50°	8.2	0.6
50°-60°	2.4	0.2
60°-70°	1.1	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1239.6	97.0
0°-40°	1266.2	99.1
0°-60°	1276.9	99.9
0°-90°	1278.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1278.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	12223	
5°	9760	741
15°	1280	406
25°	185	93
35°	39	27
45°	9	8
55°	3	2
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P264326

CATALOG NUMBER: LD2B20D010 EU2B2010SP159030 2LBSQC*MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	12223.0
1°	12070.9
2°	11754.8
3°	11264.3
4°	10590.2
5°	9760.1
6°	8742.4
7°	7605.3
8°	6418.4
9°	5269.5
10°	4211.2
11°	3315.4
12°	2609.9
13°	2053.8
14°	1622.3
15°	1280.0
16°	1009.8
17°	803.9
18°	646.6
19°	525.9
20°	434.1
22.5°	280.7
25°	184.9
26°	156.1
27°	132.5
28°	111.5
29°	93.1
30°	80.0
32.5°	55.1
35°	39.3
37.5°	28.9
40°	21.0
42.5°	14.4
45°	9.2
47.5°	6.6
50°	5.2
52.5°	3.9
55°	2.6
57.5°	1.3
60°	1.3
62.5°	1.3
65°	1.3
67.5°	1.3



TEST NUMBER: P264326

CATALOG NUMBER: LD2B20D010 EU2B2010SP159030 2LBSQC*MW

CANDELA DISTRIBUTION (continued):

	0°
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







70°		0.0
72.5°		0.0



(END OF REPORT)