

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P265252

Luminaire Tested: **LD2B20D010 EU2B2010SP159730 2LBDL\*H**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P265252  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1711-432-2)  
Test Lab: INNOVATION CENTER(G3)  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LD2B20D010 EU2B2010SP159730 2LBDL\*H  
Description: 2000 Lumen, 2inch Portfolio LED Downlight  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1237.0 lumens  
Efficiency: N/A  
Efficacy: 59.2 lumens/watt  
Spacing Criteria (0/90/45): 0.31 / 0.31 / 0.32  
Luminous Opening: Circular (Dia: 0.17' x H: 0')  
CIE Type: Direct


Input Watts (W): 20.9  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P265252

CATALOG NUMBER: LD2B20D010 EU2B2010SP159730 2LBDL\*H

### Luminous Intensity Polar Plot

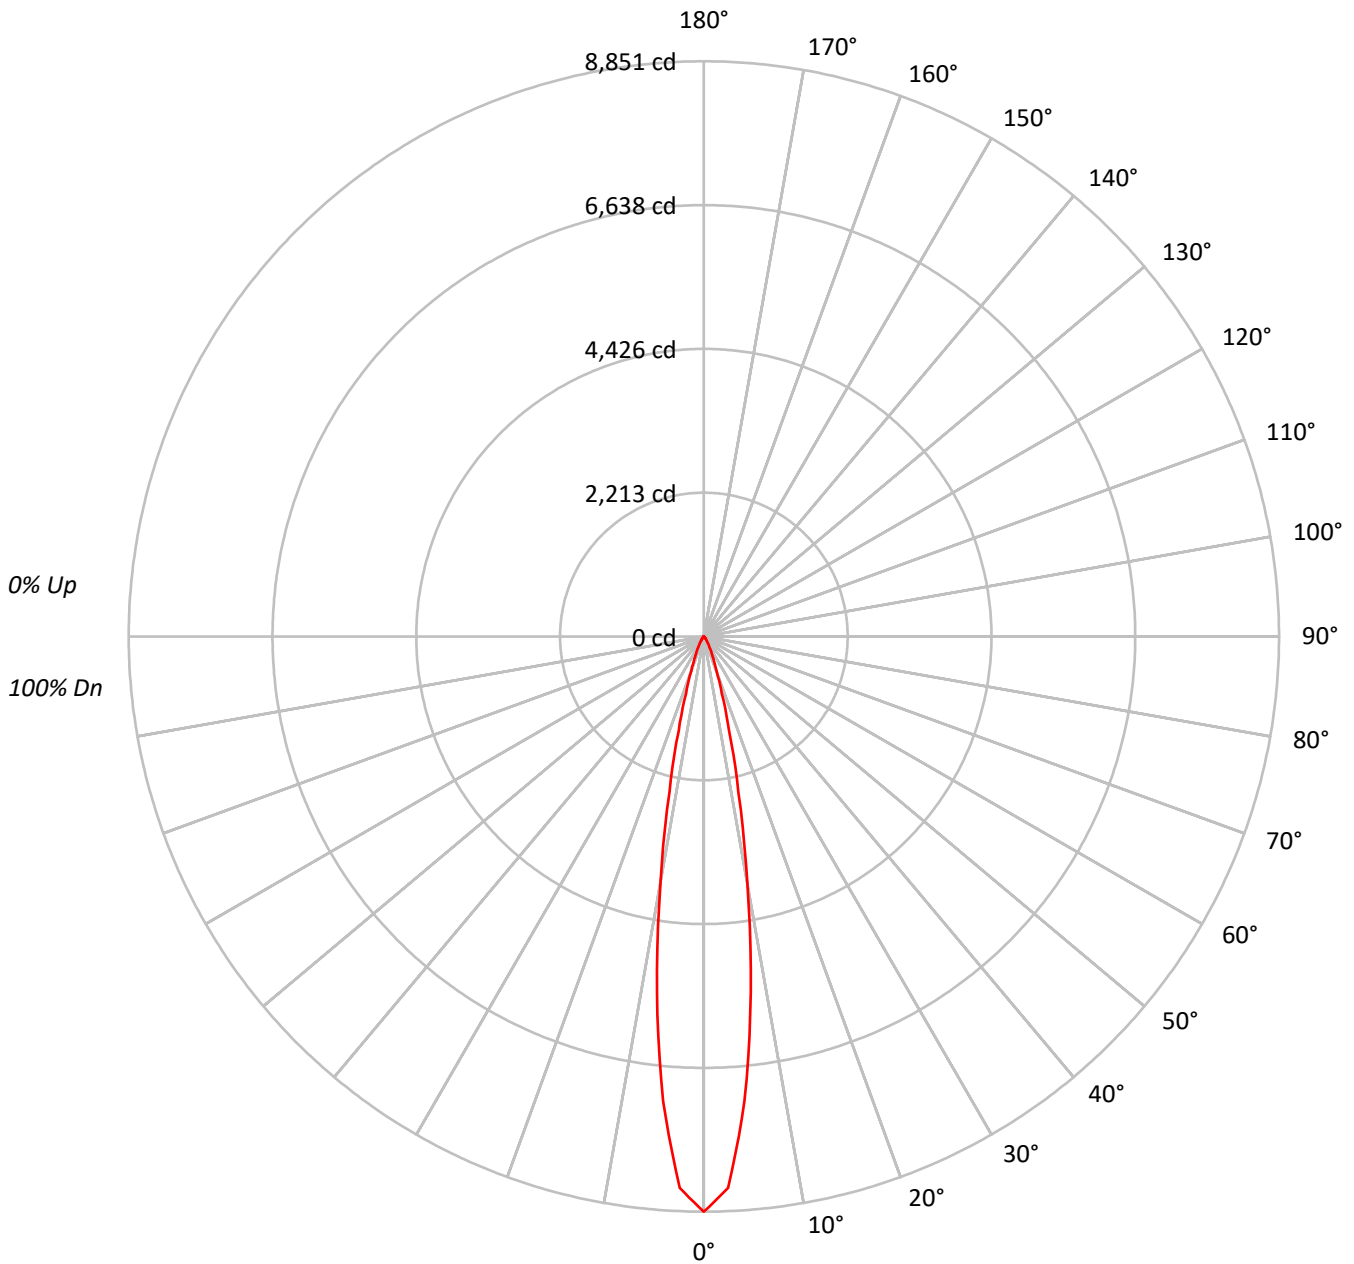



TEST NUMBER: P265252

CATALOG NUMBER: LD2B20D010 EU2B2010SP159730 2LBDL\*H

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100	100	100	100													
1	115	113	111	110	113	111	110	108	107	106	105	104	103	102	100	99	99	97	97	97	97	97	97	97													
2	112	108	106	103	110	107	104	102	104	102	100	101	99	98	98	97	96	94	94	94	94	94	94	94													
3	109	104	101	98	107	103	100	97	100	98	96	98	96	94	96	94	93	92	92	92	92	92	92	92													
4	105	100	97	94	104	99	96	93	97	95	92	96	93	91	94	92	90	89	89	89	89	89	89	89													
5	103	97	93	91	101	96	93	90	95	92	89	93	91	89	92	90	88	87	87	87	87	87	87	87													
6	100	94	90	88	99	94	90	87	92	89	87	91	88	86	90	88	86	85	85	85	85	85	85	85													
7	98	92	88	85	97	91	88	85	90	87	85	89	86	84	88	86	84	83	83	83	83	83	83	83													
8	95	89	86	83	94	89	85	83	88	85	82	87	84	82	86	84	82	81	81	81	81	81	81	81													
9	93	87	83	81	92	87	83	81	86	83	81	85	82	80	85	82	80	79	79	79	79	79	79	79													
10	91	85	82	79	91	85	81	79	84	81	79	84	81	79	83	80	78	78	78	78	78	78	78	78													

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	4366844
5°	3554185
10°	1919878
15°	765485
20°	306929
25°	146978
30°	76224
35°	40293
40°	22348
45°	13815
50°	9517
55°	6365
60°	4934
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P265252

CATALOG NUMBER: LD2B20D010 EU2B2010SP159730 2LBDL\*H

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	577.1	46.7
10°-20°	455.4	36.8
20°-30°	134.3	10.9
30°-40°	44.7	3.6
40°-50°	16.8	1.4
50°-60°	7.4	0.6
60°-70°	1.2	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1166.8	94.3
0°-40°	1211.5	97.9
0°-60°	1235.8	99.9
0°-90°	1237.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1237.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	8851	
5°	7177	577
15°	1499	455
25°	270	134
35°	67	45
45°	20	17
55°	7	7
65°	0	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P265252

CATALOG NUMBER: LD2B20D010 EU2B2010SP159730 2LBDL\*H

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	8851.2
2.5°	8494.5
5°	7176.6
7.5°	5529.2
10°	3832.3
12.5°	2452.5
15°	1498.7
17.5°	914.1
20°	584.6
22.5°	391.4
25°	270.0
27.5°	190.7
30°	133.8
32.5°	94.1
35°	66.9
37.5°	47.1
40°	34.7
42.5°	27.2
45°	19.8
47.5°	17.3
50°	12.4
52.5°	9.9
55°	7.4
57.5°	7.4
60°	5.0
62.5°	2.5
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)