

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P#

Luminaire Tested: **LD2B20D010 EU2B20WFL559730 2LBD\*WMH**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P#  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14805)  
Test Lab: INNOVATION CENTER (G1)  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LD2B20D010 EU2B20WFL559730 2LBD\*WMH  
Description: 2000 Lumen, 2inch Portfolio LED Downlight  
WIDE FLOOD OPTIC  
SPUN ROUND TRIM WITH WHEAT METALLIC HAZE FINISH  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 1291.3 lumens  
Efficiency: N/A  
Efficacy: 61.8 lumens/watt  
Spacing Criteria (0/90/45): 0.78 / 0.78 / 0.83  
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')  
CIE Type: Direct

Input Watts (W): 20.9  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P#  
CATALOG NUMBER: LD2B20D010 EU2B20WFL559730 2LBD\*WMH

### Luminous Intensity Polar Plot

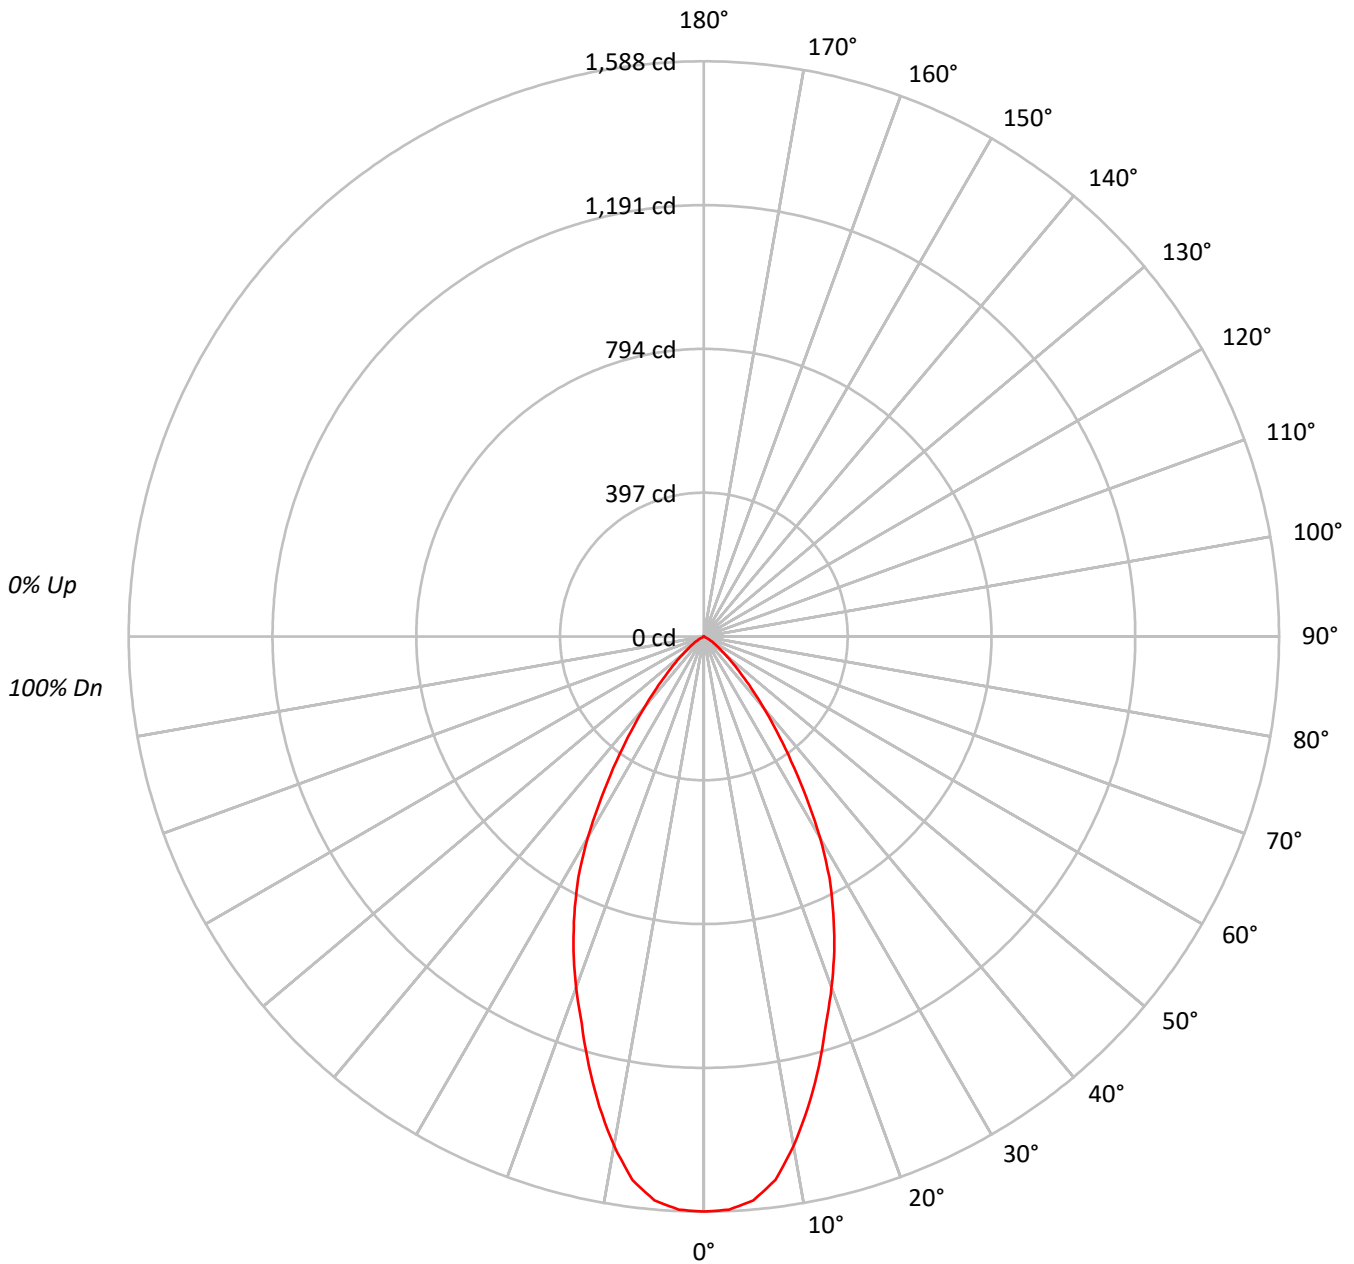



TEST NUMBER: P#

CATALOG NUMBER: LD2B20D010 EU2B20WFL559730 2LBD\*WMH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93			
2	108	103	99	95	105	101	97	94	98	95	92	95	92	90	92	90	88	86			
3	102	95	90	86	100	94	89	86	91	87	84	89	86	83	87	84	82	80			
4	97	89	83	79	95	88	83	79	86	81	78	84	80	77	82	78	76	74			
5	92	83	77	73	90	82	77	72	80	75	72	79	74	71	77	73	70	69			
6	87	78	72	67	85	77	71	67	75	70	67	74	70	66	73	69	66	64			
7	82	73	67	63	81	72	67	62	71	66	62	70	65	62	69	65	61	60			
8	78	69	63	58	77	68	62	58	67	62	58	66	61	58	65	61	58	56			
9	75	65	59	55	73	64	59	55	63	58	54	62	58	54	62	57	54	53			
10	71	61	55	51	70	61	55	51	60	55	51	59	54	51	58	54	51	50			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	614950
5°	607657
10°	561663
15°	492240
20°	424818
25°	361657
30°	286431
35°	198791
40°	129142
45°	77731
50°	44894
55°	25189
60°	11001
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P#

CATALOG NUMBER: LD2B20D010 EU2B20WFL559730 2LBD\*WMH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	144.9	11.2
10°-20°	342.0	26.5
20°-30°	385.0	29.8
30°-40°	265.9	20.6
40°-50°	115.2	8.9
50°-60°	35.7	2.8
60°-70°	2.6	0.2
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	871.9	67.5
0°-40°	1137.8	88.1
0°-60°	1288.7	99.8
0°-90°	1291.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1291.3	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1588	
5°	1563	145
15°	1228	342
25°	846	385
35°	420	266
45°	142	115
55°	37	36
65°	0	3
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P#

CATALOG NUMBER: LD2B20D010 EU2B20WFL559730 2LBD\*WMH

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1587.6
2.5°	1584.1
5°	1562.8
7.5°	1513.1
10°	1428.0
12.5°	1330.4
15°	1227.5
17.5°	1121.1
20°	1030.6
22.5°	940.2
25°	846.2
27.5°	750.4
30°	640.4
32.5°	525.1
35°	420.4
37.5°	329.9
40°	255.4
42.5°	193.4
45°	141.9
47.5°	104.7
50°	74.5
52.5°	53.2
55°	37.3
57.5°	26.6
60°	14.2
62.5°	3.5
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)