

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P#

Luminaire Tested: **LD2B20D010 EU2B20WFL559730 2LBDLC*MMS**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P#
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14811)
Test Lab: INNOVATION CENTER (G1)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD2B20D010 EU2B20WFL559730 2LBDLC*MMS
Description: 2000 Lumen, 2inch Portfolio LED Downlight
WIDE FLOOD OPTIC
LENSED CAST ROUND TRIM WITH MATTE METALLIC SILVER
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1170.1 lumens
Efficiency: N/A
Efficacy: 56.0 lumens/watt
Spacing Criteria (0/90/45): 0.79 / 0.79 / 0.83
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 20.9
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P#

CATALOG NUMBER: LD2B20D010 EU2B20WFL559730 2LBDLC*MMS

Luminous Intensity Polar Plot

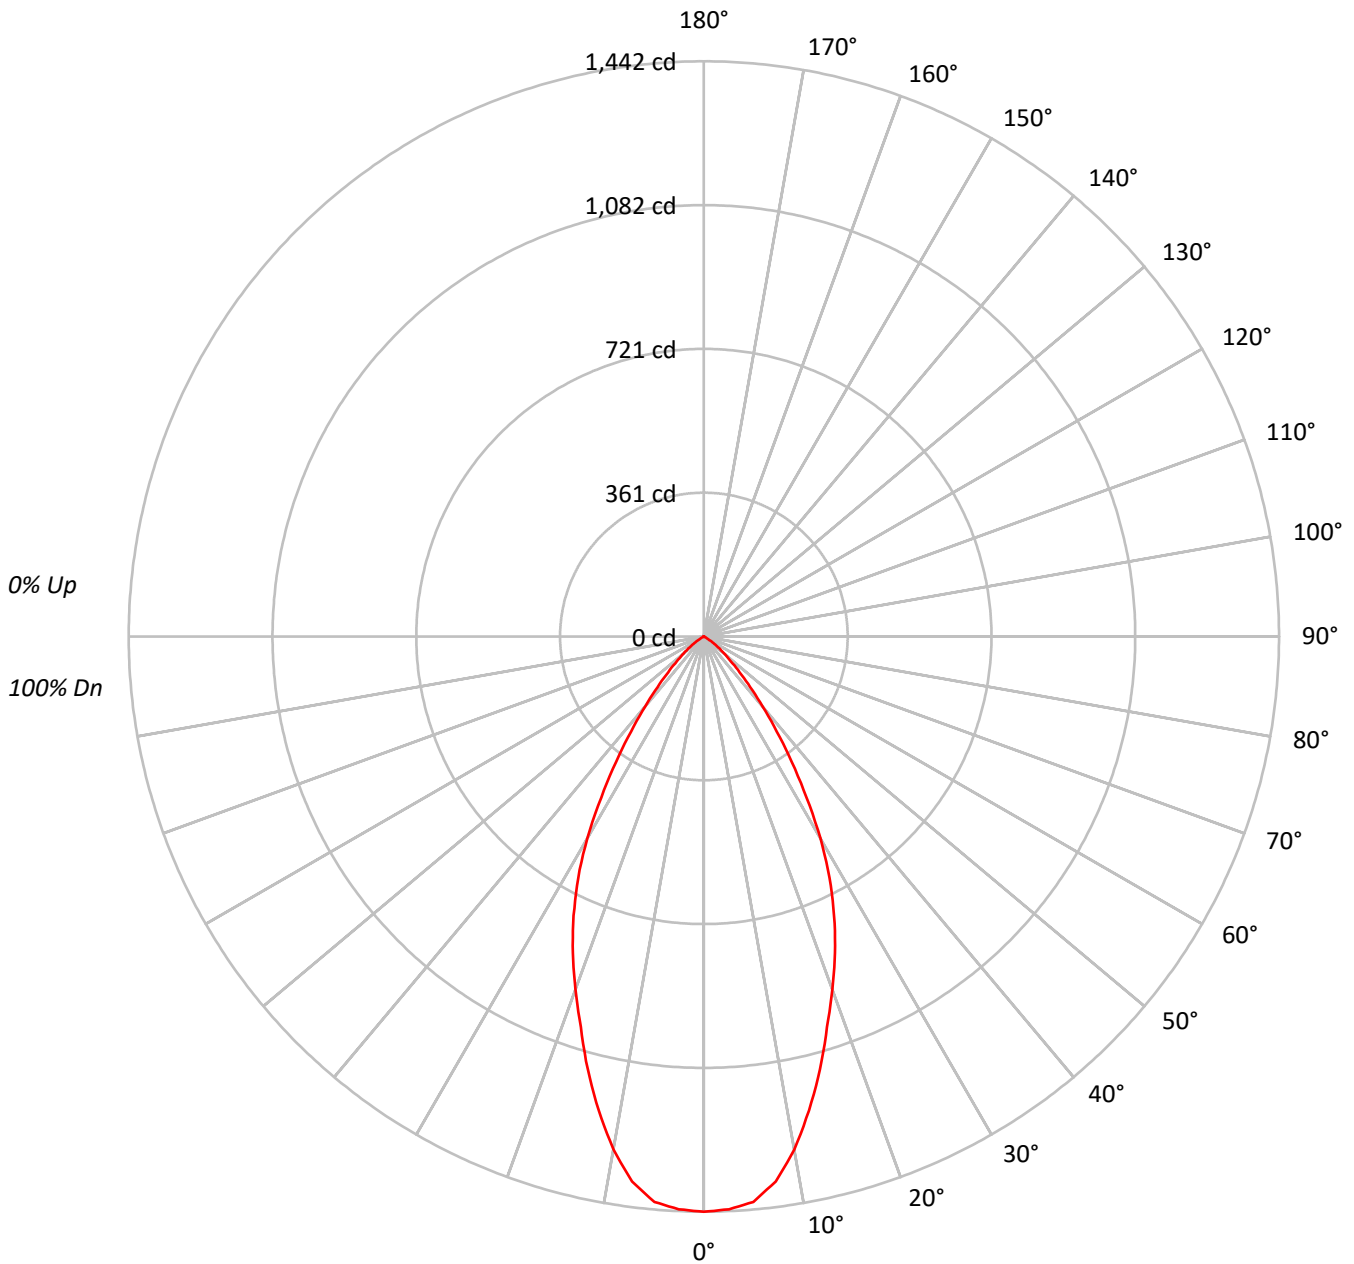



TEST NUMBER: P#

CATALOG NUMBER: LD2B20D010 EU2B20WFL559730 2LBDLC*MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93			
2	108	103	99	95	106	101	97	94	98	95	92	95	92	90	92	90	88	87			
3	102	96	91	87	100	94	90	86	92	88	84	89	86	83	87	84	82	80			
4	97	89	84	79	95	88	83	79	86	81	78	84	80	77	82	79	76	75			
5	92	83	77	73	90	82	77	73	81	76	72	79	75	71	77	74	71	69			
6	87	78	72	68	86	77	72	67	76	71	67	74	70	66	73	69	66	65			
7	83	73	67	63	81	73	67	63	71	66	62	70	65	62	69	65	62	60			
8	79	69	63	59	77	68	63	59	67	62	58	66	62	58	65	61	58	56			
9	75	65	59	55	74	65	59	55	64	58	55	63	58	55	62	58	54	53			
10	71	62	56	52	70	61	55	52	60	55	51	59	55	51	59	54	51	50			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	558630
5°	553260
10°	513560
15°	450816
20°	387926
25°	330158
30°	261473
35°	181484
40°	115287
45°	69515
50°	39651
55°	21678
60°	2479
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P#

CATALOG NUMBER: LD2B20D010 EU2B20WFL559730 2LBDLC*MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	132.0	11.3
10°-20°	312.9	26.7
20°-30°	351.3	30.0
30°-40°	242.0	20.7
40°-50°	102.3	8.7
50°-60°	28.8	2.5
60°-70°	0.8	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	796.2	68.0
0°-40°	1038.2	88.7
0°-60°	1169.3	99.9
0°-90°	1170.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1170.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1442	
5°	1423	132
15°	1124	313
25°	772	351
35°	384	242
45°	127	102
55°	32	29
65°	0	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P#

CATALOG NUMBER: LD2B20D010 EU2B20WFL559730 2LBDLC*MMS

CANDELA DISTRIBUTION (FULL):

	0°
0°	1442.2
2.5°	1437.3
5°	1422.9
7.5°	1377.9
10°	1305.7
12.5°	1217.3
15°	1124.2
17.5°	1026.2
20°	941.1
22.5°	859.2
25°	772.5
27.5°	682.5
30°	584.6
32.5°	478.6
35°	383.8
37.5°	300.3
40°	228.0
42.5°	171.8
45°	126.9
47.5°	91.5
50°	65.8
52.5°	48.2
55°	32.1
57.5°	16.1
60°	3.2
62.5°	1.6
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)