

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P224551

Luminaire Tested: **LD2B20D010 EU2B20FL409040 2LBDL\*GPH**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P224551  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14831)  
Test Lab: INNOVATION CENTER (G1)  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LD2B20D010 EU2B20FL409040 2LBDL\*GPH  
Description: 2000 Lumen, 2inch Portfolio LED Downlight  
FLOOD OPTIC  
LENSED SPUN ROUND TRIM WITH GRAPHITE FINISH  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1509.3 lumens  
Efficiency: N/A  
Efficacy: 72.2 lumens/watt  
Spacing Criteria (0/90/45): 0.61 / 0.61 / 0.59  
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')  
CIE Type: Direct


Input Watts (W): 20.9  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P224551

CATALOG NUMBER: LD2B20D010 EU2B20FL409040 2LBDL\*GPH

### Luminous Intensity Polar Plot

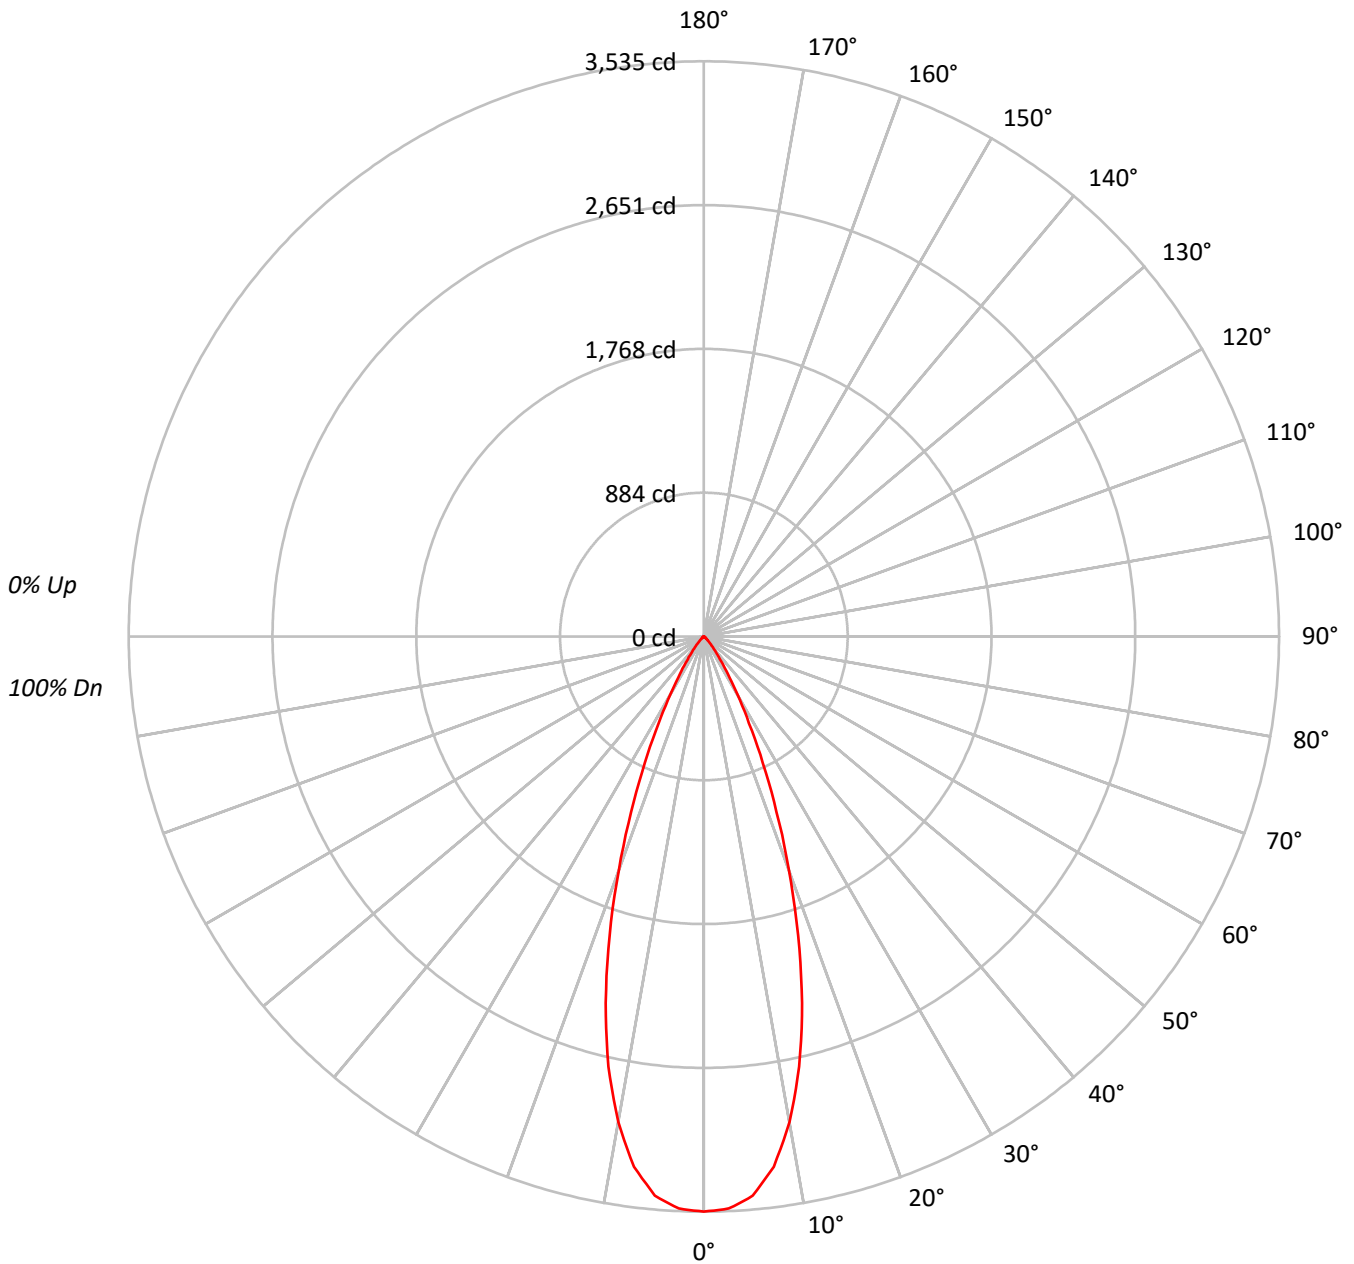



TEST NUMBER: P224551

CATALOG NUMBER: LD2B20D010 EU2B20FL409040 2LBDL\*GPH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95	95	95	95
2	110	106	102	100	108	104	101	98	101	99	96	98	96	94	95	94	92	91	91	91	91
3	106	100	96	93	104	99	95	92	96	93	91	94	92	89	92	90	88	87	87	87	87
4	102	95	91	87	100	94	90	87	92	89	86	90	87	85	89	86	84	83	83	83	83
5	98	91	86	83	96	90	85	82	88	84	81	87	83	81	85	82	80	79	79	79	79
6	94	87	82	78	93	86	81	78	85	81	78	83	80	77	82	79	77	75	75	75	75
7	91	83	78	75	89	82	78	74	81	77	74	80	76	74	79	76	73	72	72	72	72
8	87	80	75	71	86	79	74	71	78	74	71	77	73	71	76	73	70	69	69	69	69
9	84	76	72	68	83	76	71	68	75	71	68	74	70	68	73	70	68	66	66	66	66
10	81	73	69	65	80	73	68	65	72	68	65	72	68	65	71	67	65	64	64	64	64

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	1369191
5°	1341487
10°	1192000
15°	935196
20°	628984
25°	365973
30°	183335
35°	85541
40°	39895
45°	16872
50°	8135
55°	5200
60°	2944
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P224551

CATALOG NUMBER: LD2B20D010 EU2B20FL409040 2LBDL\*GPH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	315.8	20.9
10°-20°	633.0	41.9
20°-30°	400.3	26.5
30°-40°	124.5	8.3
40°-50°	27.7	1.8
50°-60°	7.0	0.5
60°-70°	0.9	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1349.1	89.4
0°-40°	1473.7	97.6
0°-60°	1508.4	99.9
0°-90°	1509.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1509.3	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	3535	
5°	3450	316
15°	2332	633
25°	856	400
35°	181	125
45°	31	28
55°	8	7
65°	0	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P224551

CATALOG NUMBER: LD2B20D010 EU2B20FL409040 2LBDL\*GPH

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	3534.8
2.5°	3519.4
5°	3450.1
7.5°	3286.6
10°	3030.6
12.5°	2707.4
15°	2332.1
17.5°	1926.1
20°	1525.9
22.5°	1166.1
25°	856.3
27.5°	600.4
30°	409.9
32.5°	271.3
35°	180.9
37.5°	121.2
40°	78.9
42.5°	48.1
45°	30.8
47.5°	21.2
50°	13.5
52.5°	9.6
55°	7.7
57.5°	5.8
60°	3.8
62.5°	1.9
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)