

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P225496

Luminaire Tested: **LD2B20D010 EU2B20FL409040 2LBDL\*H**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P225496  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14832)  
Test Lab: INNOVATION CENTER (G1)  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LD2B20D010 EU2B20FL409040 2LBDL\*H  
Description: 2000 Lumen, 2inch Portfolio LED Downlight  
FLOOD OPTIC  
LENSED SPUN ROUND TRIM WITH HAZE FINISH  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1489.9 lumens  
Efficiency: N/A  
Efficacy: 71.3 lumens/watt  
Spacing Criteria (0/90/45): 0.6 / 0.6 / 0.6  
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')  
CIE Type: Direct


Input Watts (W): 20.9  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P225496

CATALOG NUMBER: LD2B20D010 EU2B20FL409040 2LBDL\*H

### Luminous Intensity Polar Plot

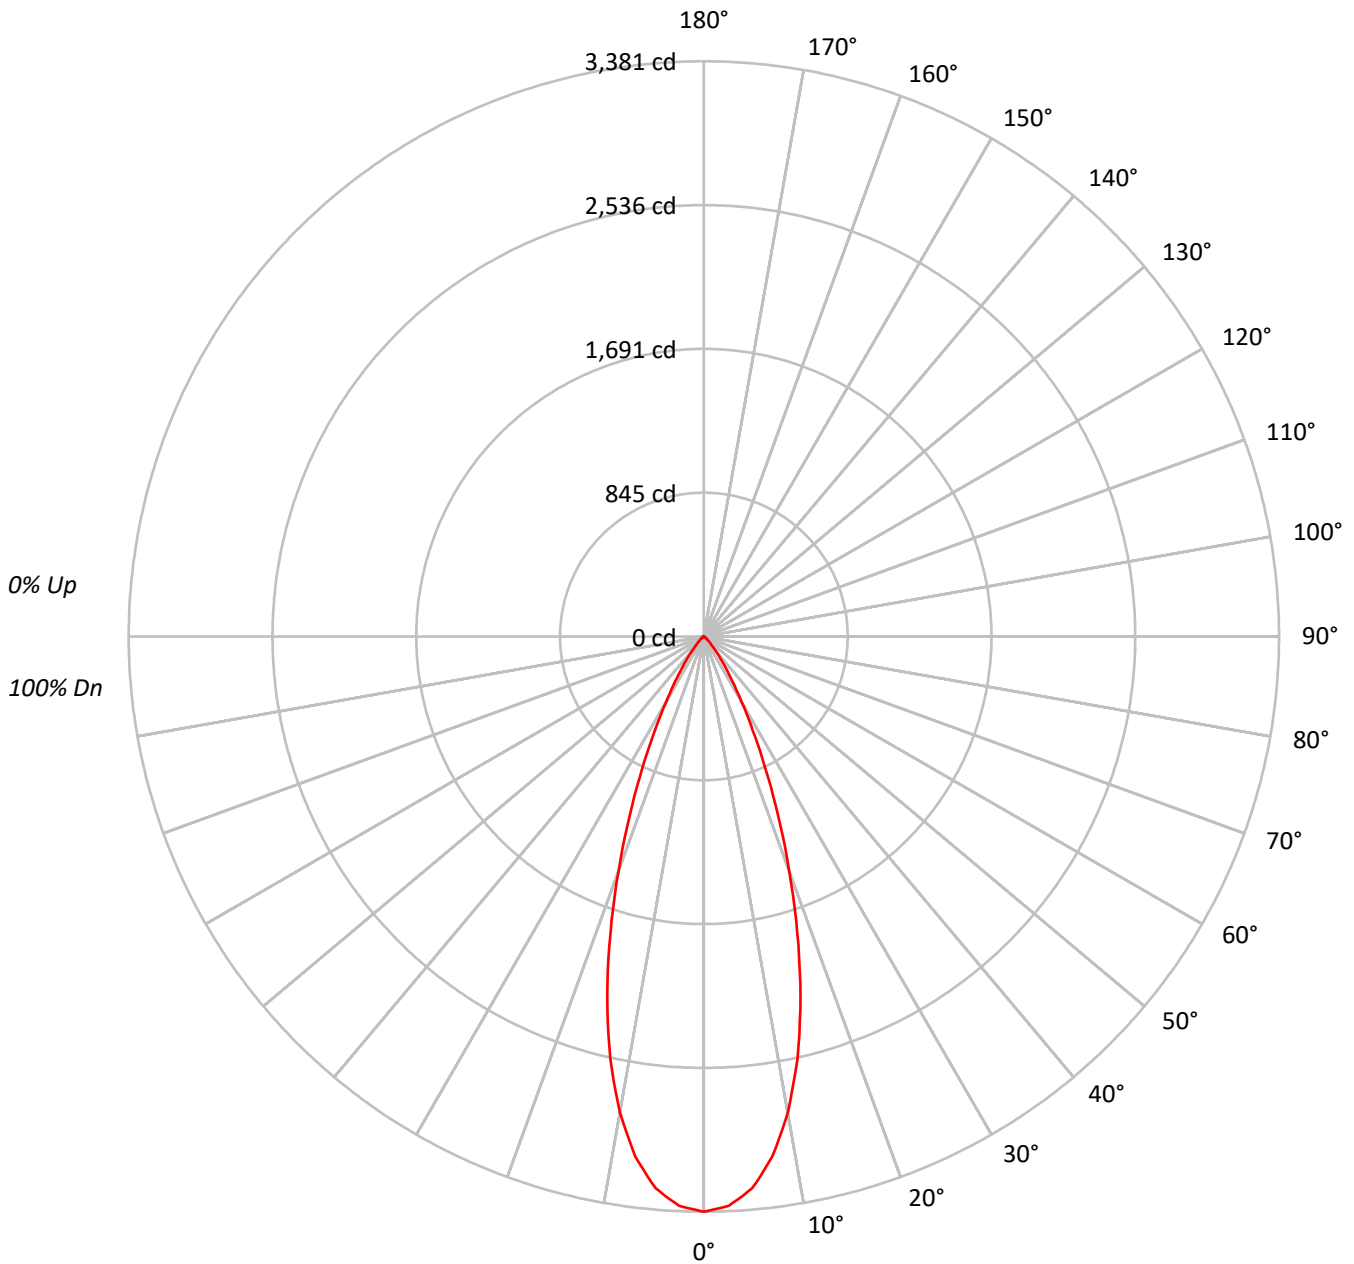



TEST NUMBER: P225496

CATALOG NUMBER: LD2B20D010 EU2B20FL409040 2LBDL\*H

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |   |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|---|
| RF  | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     | 20  |     |    |    |   |
| RC  | 80  |     |     |     | 70  |     |     |     | 50  |     |     |     | 30  |     |     |     | 10  |     |    | 0  |   |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30 | 10 | 0 |
| RCR |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |   |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 |    |    |   |
| 1   | 114 | 112 | 110 | 108 | 112 | 110 | 108 | 106 | 106 | 104 | 103 | 102 | 101 | 100 | 99  | 98  | 97  | 95  |    |    |   |
| 2   | 110 | 105 | 102 | 99  | 108 | 104 | 101 | 98  | 101 | 98  | 96  | 98  | 96  | 94  | 95  | 93  | 92  | 90  |    |    |   |
| 3   | 105 | 100 | 96  | 92  | 103 | 98  | 95  | 91  | 96  | 93  | 90  | 94  | 91  | 89  | 91  | 89  | 87  | 86  |    |    |   |
| 4   | 101 | 95  | 90  | 86  | 99  | 94  | 89  | 86  | 91  | 88  | 85  | 90  | 86  | 84  | 88  | 85  | 83  | 82  |    |    |   |
| 5   | 97  | 90  | 85  | 81  | 96  | 89  | 84  | 81  | 87  | 83  | 80  | 86  | 82  | 80  | 84  | 81  | 79  | 78  |    |    |   |
| 6   | 93  | 86  | 81  | 77  | 92  | 85  | 80  | 77  | 84  | 79  | 76  | 82  | 79  | 76  | 81  | 78  | 75  | 74  |    |    |   |
| 7   | 90  | 82  | 77  | 73  | 88  | 81  | 76  | 73  | 80  | 76  | 73  | 79  | 75  | 72  | 78  | 75  | 72  | 71  |    |    |   |
| 8   | 86  | 78  | 73  | 70  | 85  | 78  | 73  | 70  | 77  | 72  | 69  | 76  | 72  | 69  | 75  | 71  | 69  | 68  |    |    |   |
| 9   | 83  | 75  | 70  | 67  | 82  | 75  | 70  | 67  | 74  | 69  | 66  | 73  | 69  | 66  | 72  | 69  | 66  | 65  |    |    |   |
| 10  | 80  | 72  | 67  | 64  | 79  | 72  | 67  | 64  | 71  | 67  | 64  | 70  | 66  | 64  | 70  | 66  | 63  | 62  |    |    |   |

**AVERAGE LUMINANCE (cd/sqm):**

|     | 0°      |
|-----|---------|
| 0°  | 1309694 |
| 5°  | 1266094 |
| 10° | 1117112 |
| 15° | 880097  |
| 20° | 604787  |
| 25° | 365204  |
| 30° | 197961  |
| 35° | 101760  |
| 40° | 49755   |
| 45° | 23555   |
| 50° | 12353   |
| 55° | 8306    |
| 60° | 4726    |
| 65° | 1833    |
| 70° | 0       |
| 75° | 0       |
| 80° | 0       |
| 85° | 0       |



TEST NUMBER: P225496

CATALOG NUMBER: LD2B20D010 EU2B20FL409040 2LBDL\*H

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 297.5  | 20.0      |
| 10°-20°   | 597.5  | 40.1      |
| 20°-30°   | 399.2  | 26.8      |
| 30°-40°   | 144.6  | 9.7       |
| 40°-50°   | 37.3   | 2.5       |
| 50°-60°   | 11.1   | 0.7       |
| 60°-70°   | 2.7    | 0.2       |
| 70°-80°   | 0.0    | 0.0       |
| 80°-90°   | 0.0    | 0.0       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| 0°-30°    | 1294.1 | 86.9      |
| 0°-40°    | 1438.7 | 96.6      |
| 0°-60°    | 1487.1 | 99.8      |
| 0°-90°    | 1489.9 | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 1489.9 | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°   | Flux |
|-----|------|------|
| 0°  | 3381 |      |
| 5°  | 3256 | 297  |
| 15° | 2195 | 597  |
| 25° | 854  | 399  |
| 35° | 215  | 145  |
| 45° | 43   | 37   |
| 55° | 12   | 11   |
| 65° | 2    | 3    |
| 75° | 0    | 0    |
| 85° | 0    | 0    |
| 90° | 0    |      |



TEST NUMBER: P225496

CATALOG NUMBER: LD2B20D010 EU2B20FL409040 2LBDL\*H

**CANDELA DISTRIBUTION (FULL):**

| 0°    |        |
|-------|--------|
| 0°    | 3381.2 |
| 2.5°  | 3350.4 |
| 5°    | 3256.2 |
| 7.5°  | 3084.0 |
| 10°   | 2840.2 |
| 12.5° | 2541.0 |
| 15°   | 2194.7 |
| 17.5° | 1825.8 |
| 20°   | 1467.2 |
| 22.5° | 1137.3 |
| 25°   | 854.5  |
| 27.5° | 623.0  |
| 30°   | 442.6  |
| 32.5° | 311.5  |
| 35°   | 215.2  |
| 37.5° | 149.6  |
| 40°   | 98.4   |
| 42.5° | 63.5   |
| 45°   | 43.0   |
| 47.5° | 30.7   |
| 50°   | 20.5   |
| 52.5° | 16.4   |
| 55°   | 12.3   |
| 57.5° | 8.2    |
| 60°   | 6.1    |
| 62.5° | 4.1    |
| 65°   | 2.0    |
| 67.5° | 2.0    |
| 70°   | 0.0    |
| 72.5° | 0.0    |
| 75°   | 0.0    |
| 77.5° | 0.0    |
| 80°   | 0.0    |
| 82.5° | 0.0    |
| 85°   | 0.0    |
| 87.5° | 0.0    |
| 90°   | 0.0    |



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)