

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P#

Luminaire Tested: **LD2B20D010 EU2B20WFL559040 2LBD\*B**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P#  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14809)  
Test Lab: INNOVATION CENTER (G1)  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LD2B20D010 EU2B20WFL559040 2LBD\*B  
Description: 2000 Lumen, 2inch Portfolio LED Downlight  
WIDE FLOOD OPTIC  
SPUN ROUND TRIM WITH BLACK FINISH  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 1497.2 lumens  
Efficiency: N/A  
Efficacy: 71.6 lumens/watt  
Spacing Criteria (0/90/45): 0.79 / 0.79 / 0.84  
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')  
CIE Type: Direct

Input Watts (W): 20.9  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P#  
CATALOG NUMBER: LD2B20D010 EU2B20WFL559040 2LBD\*B

### Luminous Intensity Polar Plot

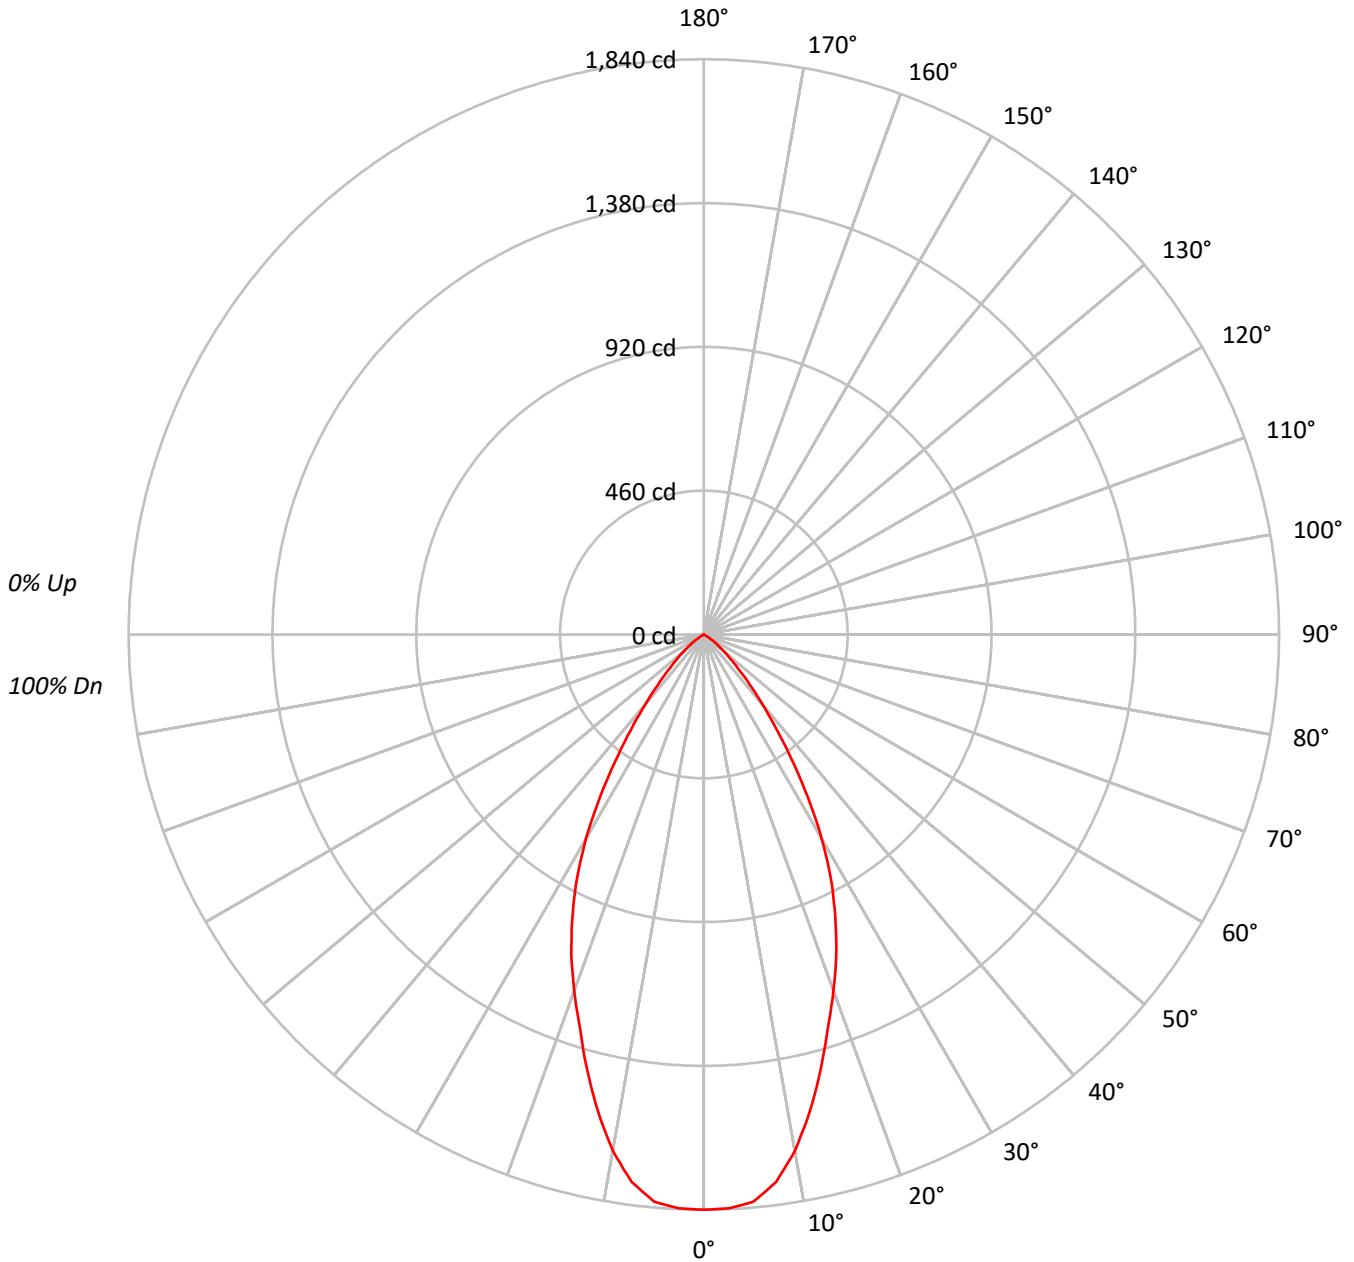



TEST NUMBER: P#

CATALOG NUMBER: LD2B20D010 EU2B20WFL559040 2LBD\*B

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	113	111	108	106	111	109	106	104	104	103	101	101	99	98	97	96	95	93
2	108	103	99	95	106	101	97	94	98	95	92	95	92	90	92	90	88	87
3	102	96	91	87	100	94	90	86	92	88	85	89	86	83	87	84	82	80
4	97	89	84	79	95	88	83	79	86	82	78	84	80	77	82	79	76	75
5	92	83	78	73	90	83	77	73	81	76	72	79	75	72	77	74	71	69
6	87	78	72	68	86	77	72	68	76	71	67	74	70	67	73	69	66	65
7	83	73	67	63	81	73	67	63	71	66	63	70	66	62	69	65	62	60
8	79	69	63	59	78	69	63	59	67	62	59	66	62	58	65	61	58	57
9	75	65	59	55	74	65	59	55	64	59	55	63	58	55	62	58	55	53
10	71	62	56	52	70	61	56	52	60	55	52	60	55	52	59	55	51	50

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	712755
5°	708129
10°	659521
15°	578377
20°	499634
25°	424996
30°	337062
35°	232601
40°	146081
45°	87153
50°	50438
55°	25459
60°	1627
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P#

CATALOG NUMBER: LD2B20D010 EU2B20WFL559040 2LBD\*B

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	169.1	11.3
10°-20°	402.0	26.9
20°-30°	452.5	30.2
30°-40°	310.9	20.8
40°-50°	129.1	8.6
50°-60°	33.3	2.2
60°-70°	0.3	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1023.6	68.4
0°-40°	1334.5	89.1
0°-60°	1496.9	100.0
0°-90°	1497.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1497.2	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1840	
5°	1821	169
15°	1442	402
25°	994	452
35°	492	311
45°	159	129
55°	38	33
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P#

CATALOG NUMBER: LD2B20D010 EU2B20WFL559040 2LBD\*B

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1840.1
2.5°	1838.0
5°	1821.2
7.5°	1766.8
10°	1676.8
12.5°	1563.8
15°	1442.3
17.5°	1318.8
20°	1212.1
22.5°	1107.4
25°	994.4
27.5°	879.2
30°	753.6
32.5°	619.6
35°	491.9
37.5°	383.1
40°	288.9
42.5°	217.7
45°	159.1
47.5°	115.1
50°	83.7
52.5°	58.6
55°	37.7
57.5°	12.6
60°	2.1
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)