

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P264843

Luminaire Tested: **LD2B20D010 EU2B2010SP158050 2LBLC\*MW**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P264843  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1711-432-2)  
Test Lab: INNOVATION CENTER(G3)  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LD2B20D010 EU2B2010SP158050 2LBLC\*MW  
Description: 2000 Lumen, 2inch Portfolio LED Downlight  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1919.0 lumens  
Efficiency: N/A  
Efficacy: 91.8 lumens/watt  
Spacing Criteria (0/90/45): 0.31 / 0.31 / 0.32  
Luminous Opening: Circular (Dia: 0.17' x H: 0')  
CIE Type: Direct


Input Watts (W): 20.9  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P264843

CATALOG NUMBER: LD2B20D010 EU2B2010SP158050 2LBLC\*MW

### Luminous Intensity Polar Plot

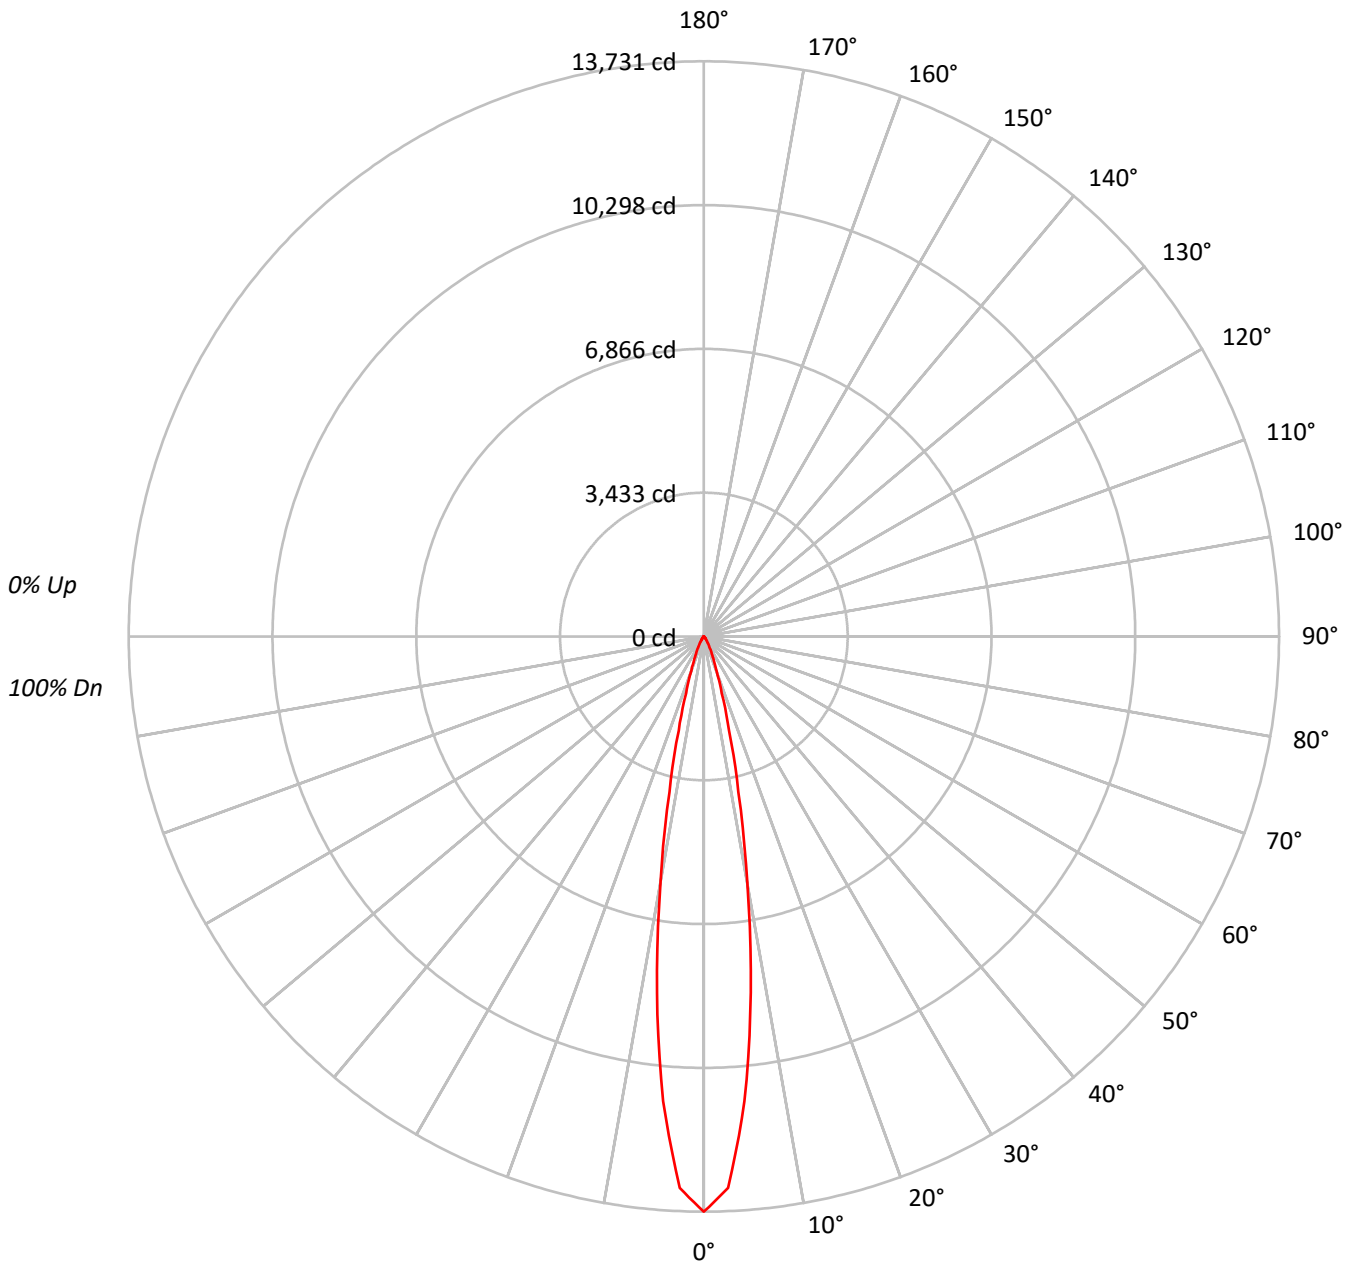



TEST NUMBER: P264843

CATALOG NUMBER: LD2B20D010 EU2B2010SP158050 2LBLC\*MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									20									
RC	80									70									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																			
RCR																																														
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100											100																	
1	115	113	111	110	113	111	110	108	107	106	105	104	103	102	100	99	99	97											97																	
2	112	108	106	103	110	107	104	102	104	102	100	101	99	98	98	97	96	94											94																	
3	109	104	101	98	107	103	100	97	100	98	96	98	96	94	96	94	93	92											92																	
4	106	100	97	94	104	99	96	93	97	95	92	96	93	91	94	92	90	89											89																	
5	103	97	93	91	101	96	93	90	95	92	89	93	91	89	92	90	88	87											87																	
6	100	94	90	88	99	94	90	87	92	89	87	91	88	86	90	88	86	85											85																	
7	98	92	88	85	97	91	88	85	90	87	85	89	86	84	88	86	84	83											83																	
8	95	89	86	83	94	89	85	83	88	85	82	87	84	82	86	84	82	81											81																	
9	93	87	83	81	92	87	83	81	86	83	81	85	82	80	85	82	80	79											79																	
10	91	85	82	79	91	85	81	79	84	81	79	84	81	79	83	80	78	78											78																	

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	6774449
5°	5513726
10°	2978383
15°	1187530
20°	476197
25°	228034
30°	118210
35°	62517
40°	34649
45°	21420
50°	14737
55°	9892
60°	7598
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P264843

CATALOG NUMBER: LD2B20D010 EU2B2010SP158050 2LBLC\*MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	895.3	46.7
10°-20°	706.4	36.8
20°-30°	208.4	10.9
30°-40°	69.4	3.6
40°-50°	26.1	1.4
50°-60°	11.5	0.6
60°-70°	1.8	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1810.2	94.3
0°-40°	1879.5	97.9
0°-60°	1917.1	99.9
0°-90°	1919.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1919.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	13731	
5°	11133	895
15°	2325	706
25°	419	208
35°	104	69
45°	31	26
55°	12	12
65°	0	2
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P264843

CATALOG NUMBER: LD2B20D010 EU2B2010SP158050 2LBLE\*MMW

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	13731.2
2.5°	13177.8
5°	11133.3
7.5°	8577.7
10°	5945.2
12.5°	3804.6
15°	2325.0
17.5°	1418.1
20°	907.0
22.5°	607.2
25°	418.9
27.5°	295.9
30°	207.5
32.5°	146.0
35°	103.8
37.5°	73.0
40°	53.8
42.5°	42.3
45°	30.7
47.5°	26.9
50°	19.2
52.5°	15.4
55°	11.5
57.5°	11.5
60°	7.7
62.5°	3.8
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)