

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P225408

Luminaire Tested: **LD2B20D010 EU2B20FL408050 2LBDC\*MB**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P225408  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14834)  
Test Lab: INNOVATION CENTER (G1)  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LD2B20D010 EU2B20FL408050 2LBDC\*MB  
Description: 2000 Lumen, 2inch Portfolio LED Downlight  
FLOOD OPTIC  
CAST ROUND TRIM WITH MATTE BLACK FINISH  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1928.4 lumens  
Efficiency: N/A  
Efficacy: 92.3 lumens/watt  
Spacing Criteria (0/90/45): 0.61 / 0.61 / 0.6  
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')  
CIE Type: Direct


Input Watts (W): 20.9  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P225408

CATALOG NUMBER: LD2B20D010 EU2B20FL408050 2LBDC\*MB

### Luminous Intensity Polar Plot

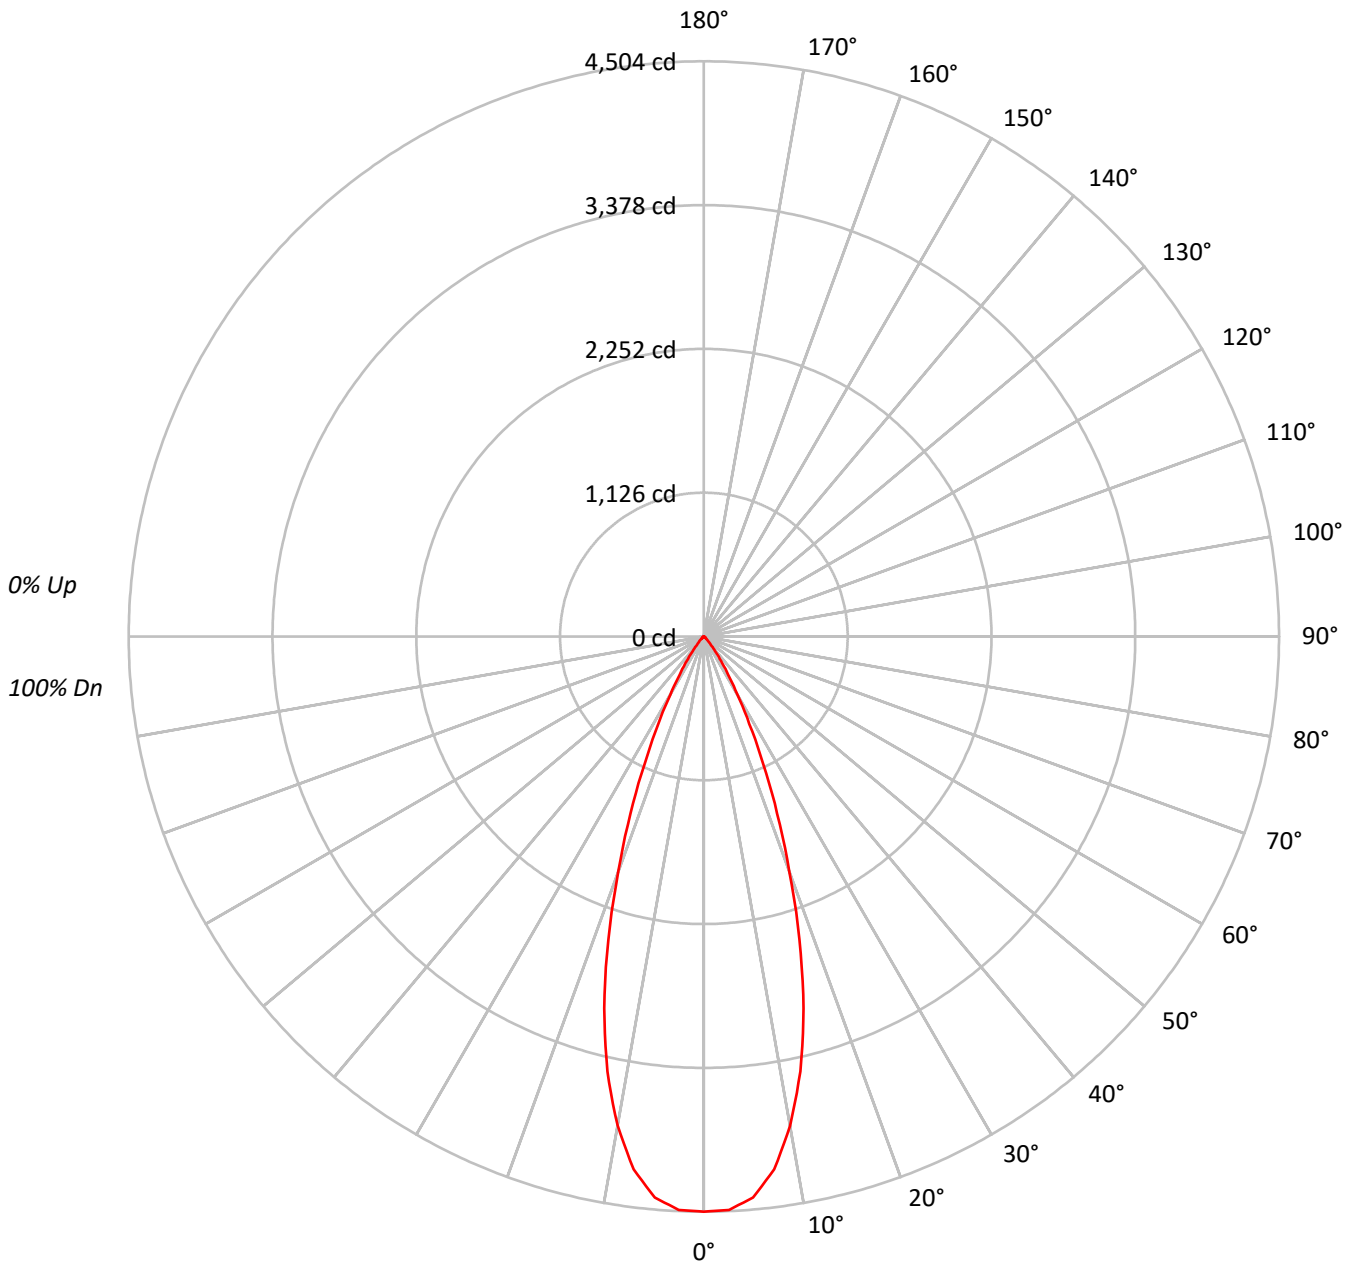



TEST NUMBER: P225408

CATALOG NUMBER: LD2B20D010 EU2B20FL408050 2LBDC\*MB

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95			95
2	110	106	103	100	108	104	101	99	101	99	96	98	96	94	96	94	92	91			91
3	106	100	96	93	104	99	95	92	97	93	91	94	92	89	92	90	88	87			87
4	102	95	91	87	100	94	90	87	92	89	86	90	87	85	89	86	84	83			83
5	98	91	86	83	96	90	86	82	88	85	82	87	84	81	85	83	80	79			79
6	94	87	82	79	93	86	82	78	85	81	78	84	80	77	82	79	77	76			76
7	91	83	78	75	90	83	78	75	81	77	74	80	77	74	79	76	74	72			72
8	87	80	75	72	86	79	75	71	78	74	71	77	74	71	76	73	71	69			69
9	84	77	72	69	83	76	72	68	75	71	68	74	71	68	74	70	68	67			67
10	82	74	69	66	81	73	69	66	73	68	65	72	68	65	71	68	65	64			64

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	1744800
5°	1714488
10°	1529470
15°	1208925
20°	806067
25°	467649
30°	234056
35°	110130
40°	43030
45°	19227
50°	9039
55°	5065
60°	1937
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P225408

CATALOG NUMBER: LD2B20D010 EU2B20FL408050 2LBDC\*MB

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	404.2	21.0
10°-20°	816.0	42.3
20°-30°	513.3	26.6
30°-40°	156.9	8.1
40°-50°	30.8	1.6
50°-60°	6.9	0.4
60°-70°	0.3	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1733.5	89.9
0°-40°	1890.4	98.0
0°-60°	1928.1	100.0
0°-90°	1928.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1928.4	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	4504	
5°	4409	404
15°	3015	816
25°	1094	513
35°	233	157
45°	35	31
55°	8	7
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P225408

CATALOG NUMBER: LD2B20D010 EU2B20FL408050 2LBDC\*MB

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	4504.5
2.5°	4494.5
5°	4409.4
7.5°	4209.0
10°	3888.6
12.5°	3487.9
15°	3014.7
17.5°	2488.9
20°	1955.5
22.5°	1499.8
25°	1094.2
27.5°	771.2
30°	523.3
32.5°	353.0
35°	232.9
37.5°	142.7
40°	85.1
42.5°	55.1
45°	35.1
47.5°	22.5
50°	15.0
52.5°	10.0
55°	7.5
57.5°	5.0
60°	2.5
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)