

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P#

Luminaire Tested: **LD2B20D010 EU2B20WFL558050 2LBDL*H**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P#
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14807)
Test Lab: INNOVATION CENTER (G1)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD2B20D010 EU2B20WFL558050 2LBDL*H
Description: 2000 Lumen, 2inch Portfolio LED Downlight
WIDE FLOOD OPTIC
LENSED SPUN ROUND TRIM WITH HAZE FINISH
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1698.3 lumens
Efficiency: N/A
Efficacy: 81.3 lumens/watt
Spacing Criteria (0/90/45): 0.79 / 0.79 / 0.83
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 20.9
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P#

CATALOG NUMBER: LD2B20D010 EU2B20WFL558050 2LBDL*H

Luminous Intensity Polar Plot

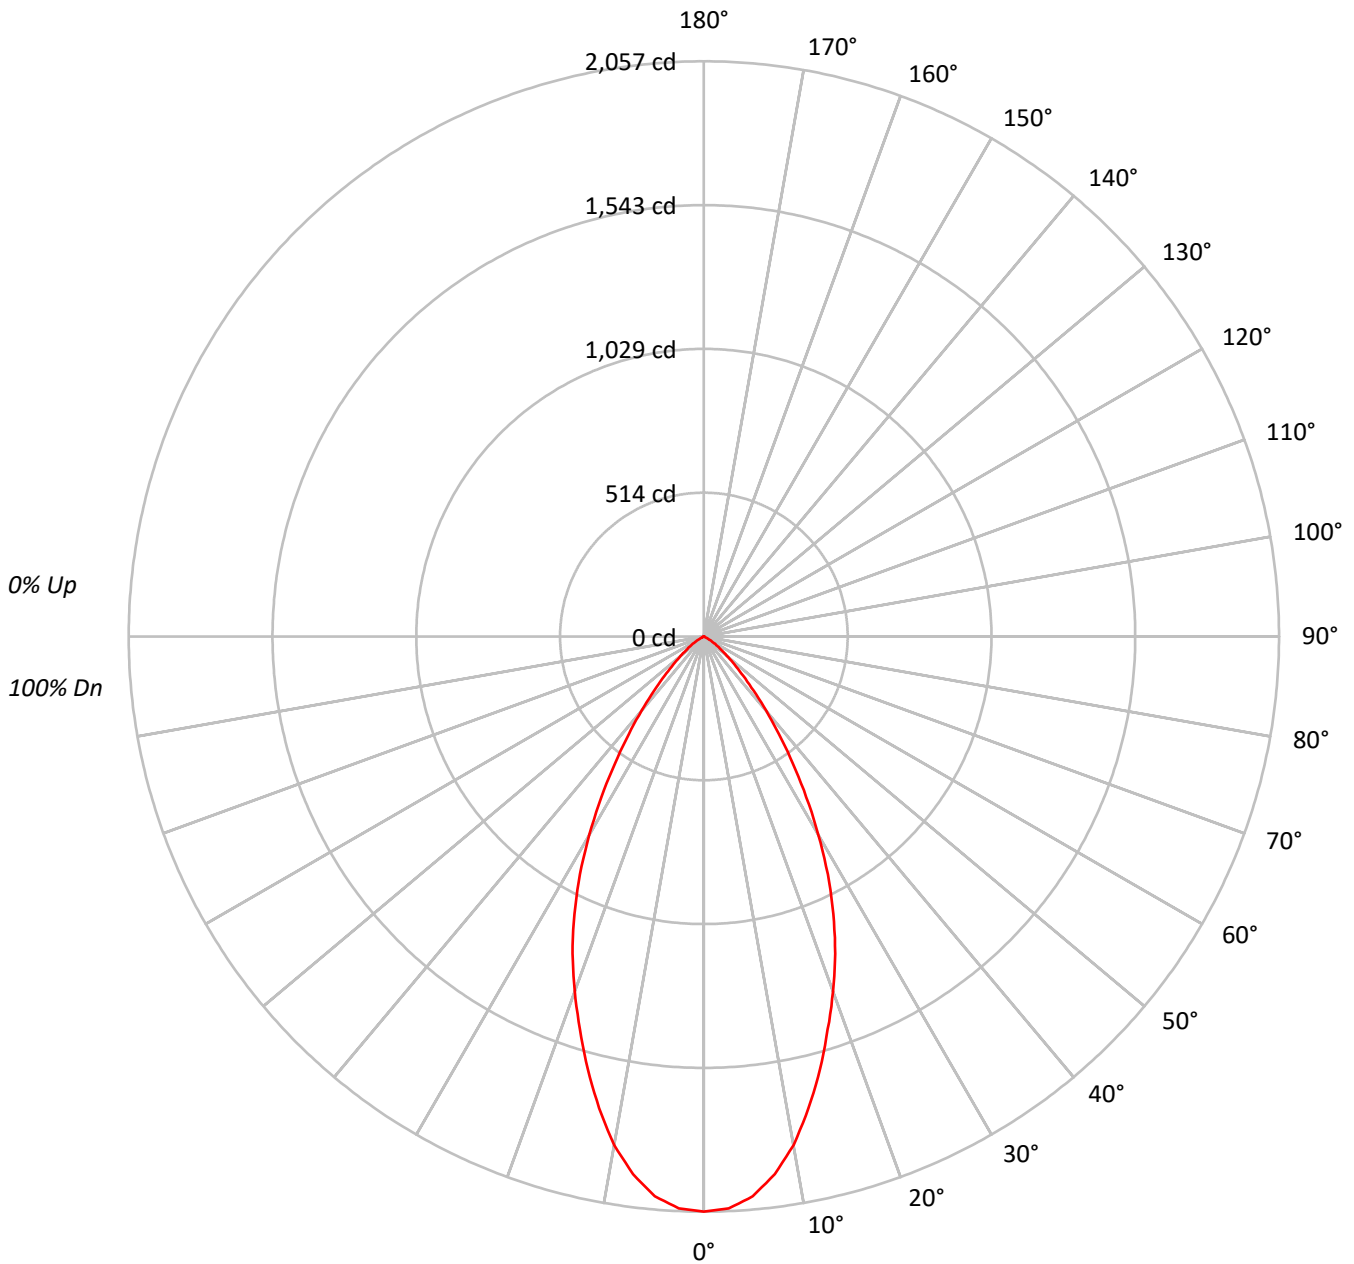



TEST NUMBER: P#

CATALOG NUMBER: LD2B20D010 EU2B20WFL558050 2LBDL*H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	111	108	106	111	108	106	104	104	102	101	101	99	98	97	96	95	93			
2	108	102	98	95	105	101	97	94	98	94	92	95	92	90	92	90	88	86			
3	102	95	90	86	100	94	89	85	91	87	84	89	85	83	86	84	81	80			
4	96	89	83	79	95	87	82	78	85	81	77	83	79	76	81	78	75	74			
5	91	83	77	72	90	82	76	72	80	75	71	78	74	71	77	73	70	68			
6	87	77	71	67	85	77	71	67	75	70	66	74	69	66	72	68	65	64			
7	82	73	66	62	81	72	66	62	71	65	62	69	65	61	68	64	61	59			
8	78	68	62	58	77	68	62	58	67	61	57	66	61	57	65	60	57	56			
9	74	64	58	54	73	64	58	54	63	58	54	62	57	54	61	57	54	52			
10	71	61	55	51	70	60	55	51	60	54	51	59	54	51	58	54	50	49			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	796732
5°	781267
10°	726229
15°	642980
20°	556642
25°	467905
30°	366402
35°	261824
40°	174801
45°	108408
50°	64900
55°	38898
60°	17431
65°	2291
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P#

CATALOG NUMBER: LD2B20D010 EU2B20WFL558050 2LBDL*H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	186.5	11.0
10°-20°	446.6	26.3
20°-30°	498.1	29.3
30°-40°	348.9	20.5
40°-50°	159.3	9.4
50°-60°	53.2	3.1
60°-70°	5.8	0.3
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1131.1	66.6
0°-40°	1480.0	87.1
0°-60°	1692.5	99.7
0°-90°	1698.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1698.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2057	
5°	2009	186
15°	1603	447
25°	1095	498
35°	554	349
45°	198	159
55°	58	53
65°	2	6
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P#

CATALOG NUMBER: LD2B20D010 EU2B20WFL558050 2LBDL*H

CANDELA DISTRIBUTION (FULL):

	0°
0°	2056.9
2.5°	2046.8
5°	2009.3
7.5°	1939.1
10°	1846.4
12.5°	1728.7
15°	1603.4
17.5°	1473.1
20°	1350.4
22.5°	1227.6
25°	1094.8
27.5°	959.5
30°	819.2
32.5°	681.4
35°	553.7
37.5°	440.9
40°	345.7
42.5°	263.1
45°	197.9
47.5°	147.8
50°	107.7
52.5°	77.7
55°	57.6
57.5°	40.1
60°	22.5
62.5°	7.5
65°	2.5
67.5°	2.5
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)