

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P264471

Luminaire Tested: **LD2B20D010 EU2B2010SP159050 2LBD*LI**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P264471
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-1805-787-1)
Test Lab: INNOVATION CENTER(G2)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD2B20D010 EU2B2010SP159050 2LBD*LI
Description: 2000 Lumen, 2inch Portfolio LED Downlight
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1537.0 lumens
Efficiency: N/A
Efficacy: 73.5 lumens/watt
Spacing Criteria (0/90/45): 0.28 / 0.28 / 0.28
Luminous Opening: Circular (Dia: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 20.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P264471

CATALOG NUMBER: LD2B20D010 EU2B2010SP159050 2LBD*LI

Luminous Intensity Polar Plot

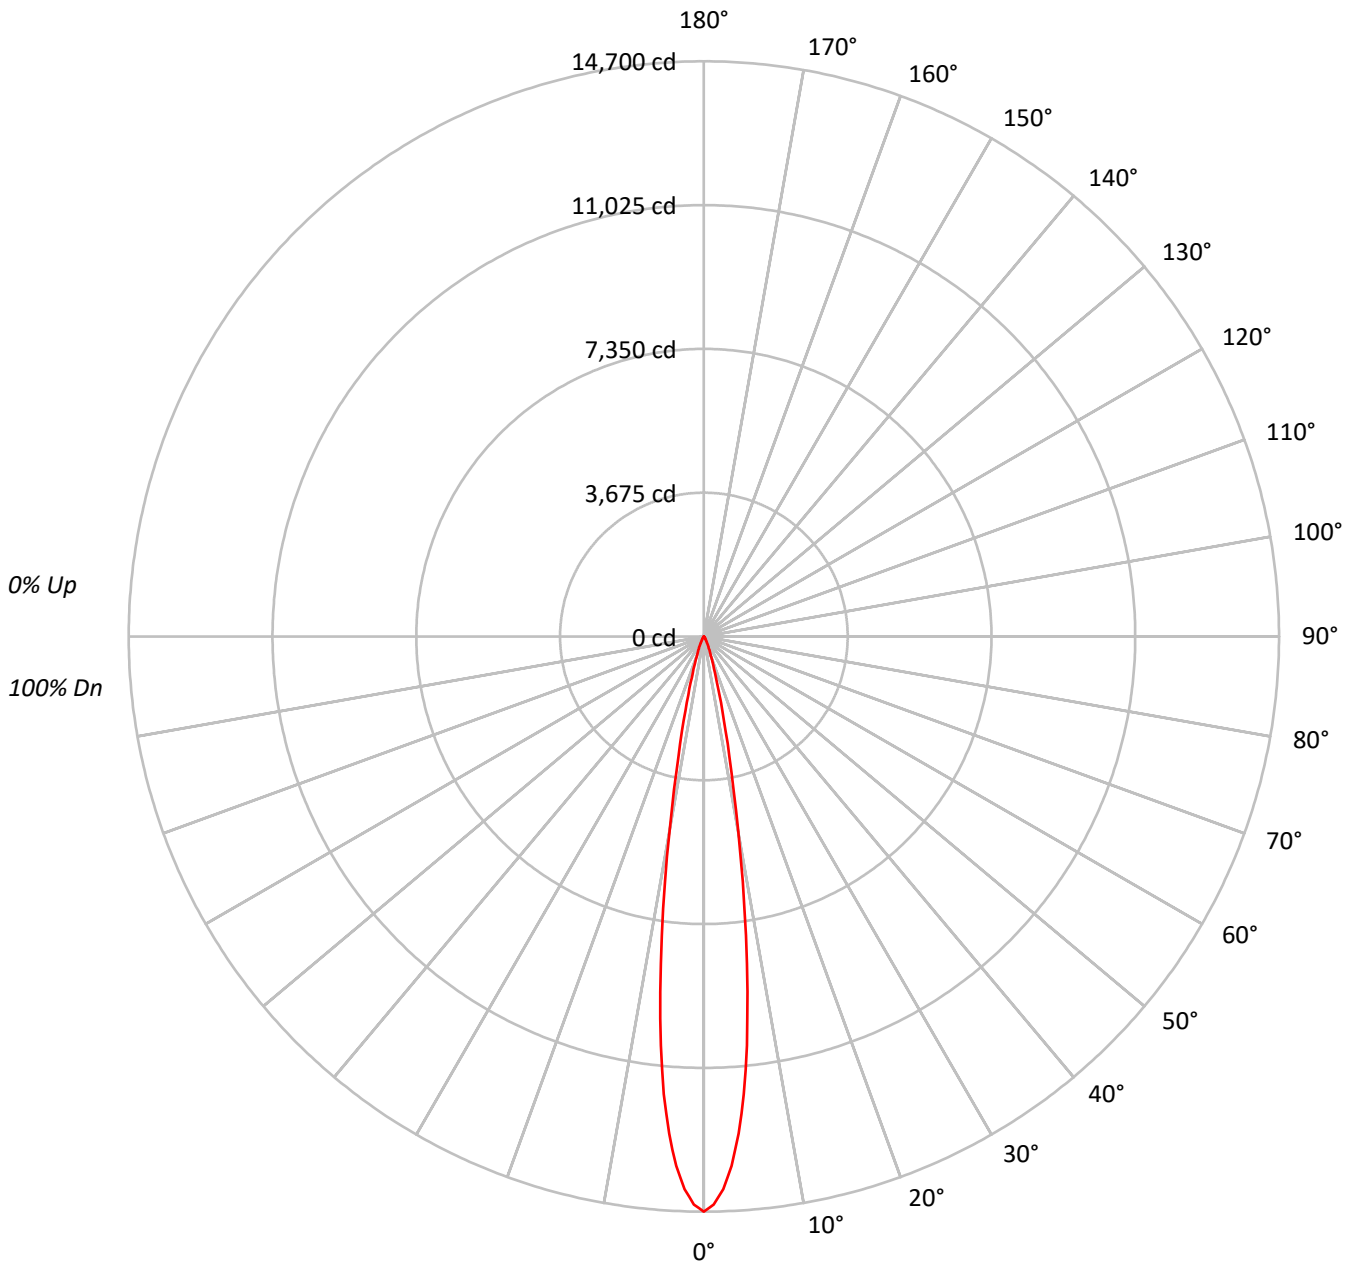



TEST NUMBER: P264471

CATALOG NUMBER: LD2B20D010 EU2B2010SP159050 2LBD*LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	116	114	112	111	113	112	110	109	108	107	106	104	103	102	101	100	100	98
2	113	109	107	105	111	108	106	104	105	103	101	102	101	99	99	98	97	96
3	110	106	103	100	108	105	102	100	102	100	98	100	98	97	98	96	95	94
4	107	103	99	97	106	102	99	96	100	97	95	98	96	94	96	95	93	92
5	105	100	97	94	104	99	96	94	98	95	93	96	94	92	95	93	91	90
6	103	98	94	92	102	97	94	91	96	93	91	95	92	90	93	91	90	89
7	101	95	92	90	100	95	92	89	94	91	89	93	90	89	92	90	88	87
8	99	93	90	88	98	93	90	88	92	89	87	91	89	87	91	88	87	86
9	97	92	88	86	96	91	88	86	91	88	86	90	87	86	89	87	85	85
10	95	90	87	85	95	90	87	85	89	86	85	89	86	84	88	86	84	83

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	7252517
5°	5813251
10°	2537226
15°	786273
20°	274115
25°	121067
30°	54804
35°	28488
40°	16230
45°	7675
50°	4835
55°	2752
60°	1579
65°	1868
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P264471

CATALOG NUMBER: LD2B20D010 EU2B2010SP159050 2LBD*LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	891.4	58.0
10°-20°	488.2	31.8
20°-30°	111.3	7.2
30°-40°	32.0	2.1
40°-50°	9.9	0.6
50°-60°	3.0	0.2
60°-70°	1.4	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1490.8	97.0
0°-40°	1522.8	99.1
0°-60°	1535.6	99.9
0°-90°	1537.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1537.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	14700	
5°	11738	891
15°	1539	488
25°	222	111
35°	47	32
45°	11	10
55°	3	3
65°	2	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P264471

CATALOG NUMBER: LD2B20D010 EU2B2010SP159050 2LBD*LI

CANDELA DISTRIBUTION (FULL):

	0°
0°	14700.2
1°	14517.2
2°	14137.1
3°	13547.2
4°	12736.5
5°	11738.1
6°	10514.1
7°	9146.6
8°	7719.2
9°	6337.5
10°	5064.6
11°	3987.3
12°	3138.8
13°	2470.0
14°	1951.1
15°	1539.4
16°	1214.5
17°	966.9
18°	777.6
19°	632.5
20°	522.1
22.5°	337.5
25°	222.4
26°	187.7
27°	159.3
28°	134.1
29°	112.0
30°	96.2
32.5°	66.2
35°	47.3
37.5°	34.7
40°	25.2
42.5°	17.3
45°	11.0
47.5°	7.9
50°	6.3
52.5°	4.7
55°	3.2
57.5°	1.6
60°	1.6
62.5°	1.6
65°	1.6
67.5°	1.6



TEST NUMBER: P264471

CATALOG NUMBER: LD2B20D010 EU2B2010SP159050 2LBD*LI

CANDELA DISTRIBUTION (continued):

	0°
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







70°		0.0
72.5°		0.0



(END OF REPORT)