

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P#

Luminaire Tested: **LD2B20D010 EU2B20FL409050 2LBD*LI**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P#
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P29152)
Test Lab: INNOVATION CENTER-P2
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD2B20D010 EU2B20FL409050 2LBD*LI
Description: 2000 Lumen, 2inch Portfolio LED Downlight
FLOOD OPTIC
SPUN ROUND TRIM WITH LI FINISH
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1642.5 lumens
Efficiency: N/A
Efficacy: 78.6 lumens/watt
Spacing Criteria (0/90/45): 0.59 / 0.59 / 0.58
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 20.9
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P#

CATALOG NUMBER: LD2B20D010 EU2B20FL409050 2LBD*LI

Luminous Intensity Polar Plot

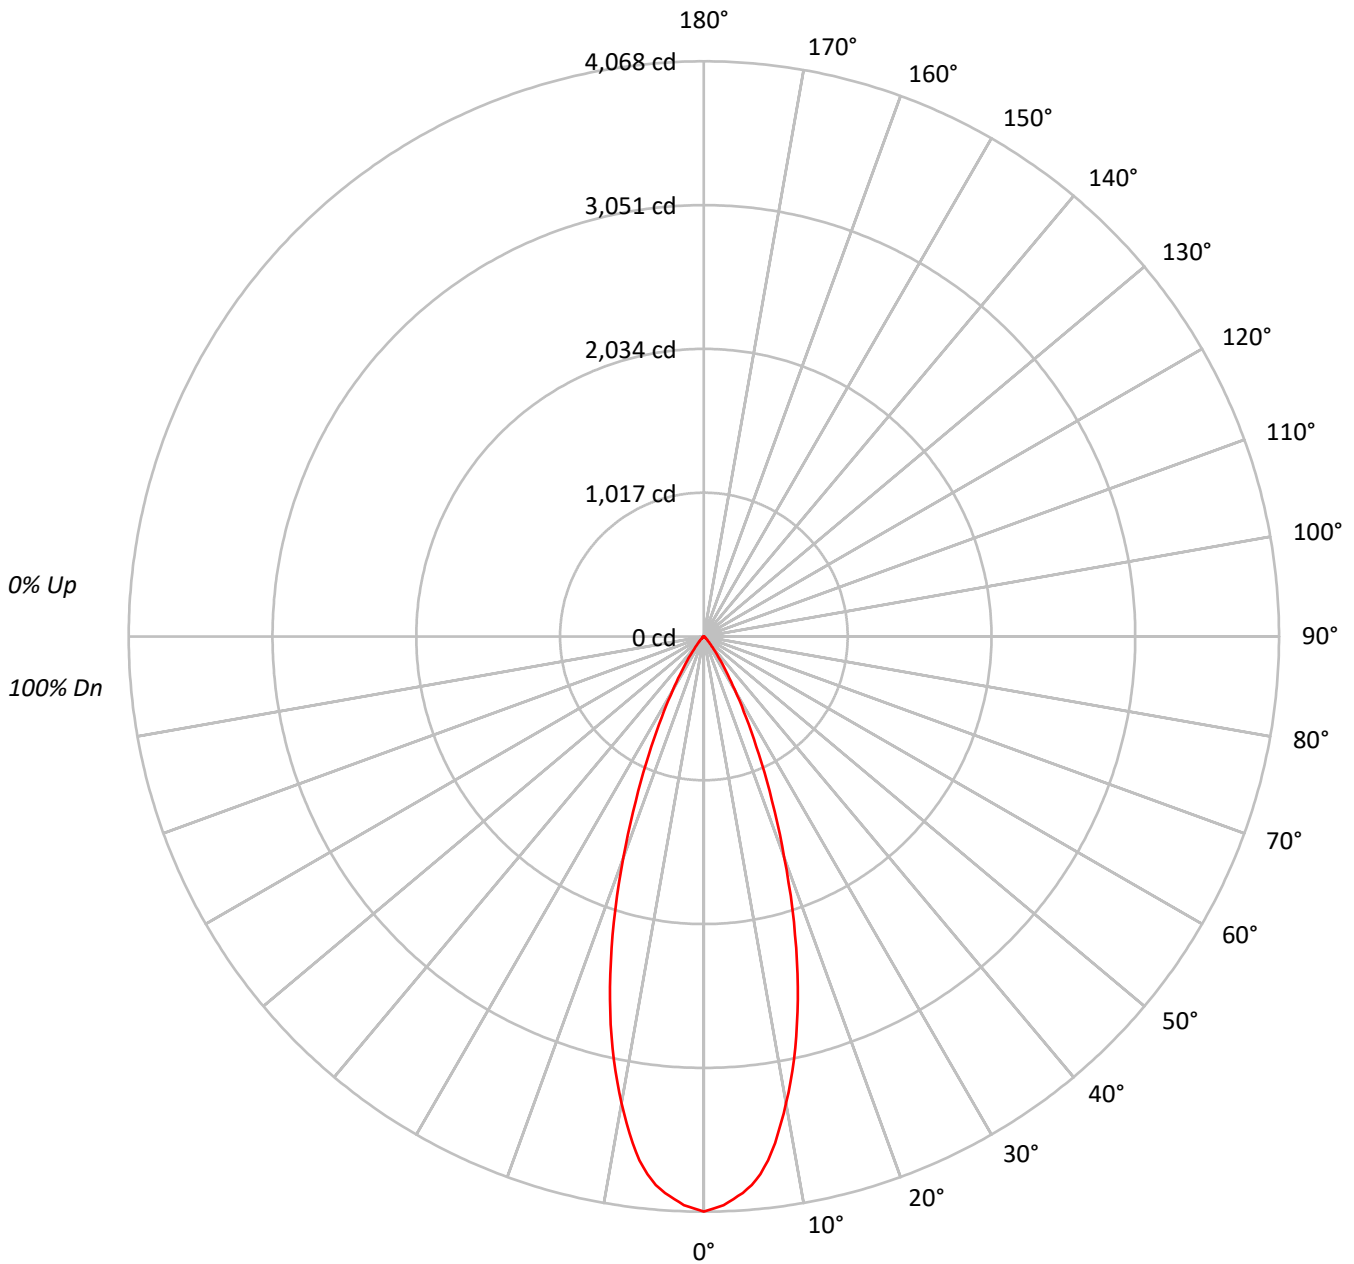



TEST NUMBER: P#

CATALOG NUMBER: LD2B20D010 EU2B20FL409050 2LBD*LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	114	112	110	108	112	110	108	106	106	105	103	102	101	100	99	98	97	96	96	96	96
2	110	106	103	100	108	104	101	99	101	99	97	98	96	95	96	94	93	91	91	91	91
3	106	101	96	93	104	99	95	92	97	94	91	94	92	90	92	90	88	87	87	87	87
4	102	96	91	88	100	95	90	87	93	89	86	91	88	85	89	86	84	83	83	83	83
5	98	91	86	83	97	90	86	83	89	85	82	87	84	81	86	83	81	79	79	79	79
6	94	87	82	79	93	86	82	79	85	81	78	84	80	78	83	79	77	76	76	76	76
7	91	83	79	75	90	83	78	75	82	78	75	81	77	74	80	76	74	73	73	73	73
8	88	80	75	72	87	80	75	72	79	74	71	78	74	71	77	73	71	70	70	70	70
9	85	77	72	69	84	76	72	69	76	71	69	75	71	68	74	71	68	67	67	67	67
10	82	74	69	66	81	74	69	66	73	69	66	72	68	66	72	68	66	65	65	65	65

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1575569
5°	1514087
10°	1318020
15°	1029192
20°	684466
25°	391958
30°	194830
35°	89560
40°	35901
45°	16434
50°	7593
55°	4254
60°	2479
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P#

CATALOG NUMBER: LD2B20D010 EU2B20FL409050 2LBD*LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	354.4	21.6
10°-20°	696.0	42.4
20°-30°	430.7	26.2
30°-40°	128.9	7.8
40°-50°	25.8	1.6
50°-60°	6.3	0.4
60°-70°	0.4	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1481.1	90.2
0°-40°	1610.0	98.0
0°-60°	1642.1	100.0
0°-90°	1642.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1642.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4068	
5°	3894	354
15°	2566	696
25°	917	431
35°	189	129
45°	30	26
55°	6	6
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P#

CATALOG NUMBER: LD2B20D010 EU2B20FL409050 2LBD*LI

CANDELA DISTRIBUTION (FULL):

	0°
0°	4067.6
1°	4045.5
2°	4025.0
3°	3984.0
4°	3946.1
5°	3894.0
6°	3823.0
7°	3733.0
8°	3617.8
9°	3486.8
10°	3351.0
11°	3210.5
12°	3060.6
13°	2904.3
14°	2737.0
15°	2566.5
17.5°	2116.7
20°	1660.5
22.5°	1256.4
25°	917.1
27.5°	644.0
30°	435.6
32.5°	287.3
35°	189.4
37.5°	118.4
40°	71.0
42.5°	45.8
45°	30.0
47.5°	18.9
50°	12.6
52.5°	9.5
55°	6.3
57.5°	4.7
60°	3.2
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0



TEST NUMBER: P#

CATALOG NUMBER: LD2B20D010 EU2B20FL409050 2LBD*LI

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







85°		0.0
87.5°		0.0



(END OF REPORT)