

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P#

Luminaire Tested: **LD2B20D010 EU2B20WFL559050 2LBD*GPH**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P#
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14806)
Test Lab: INNOVATION CENTER (G1)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD2B20D010 EU2B20WFL559050 2LBD*GPH
Description: 2000 Lumen, 2inch Portfolio LED Downlight
WIDE FLOOD OPTIC
SPUN ROUND TRIM WITH GRAPHITE FINISH
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1509.3 lumens
Efficiency: N/A
Efficacy: 72.2 lumens/watt
Spacing Criteria (0/90/45): 0.78 / 0.78 / 0.83
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')
CIE Type: Direct

Input Watts (W): 20.9
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P#
CATALOG NUMBER: LD2B20D010 EU2B20WFL559050 2LBD*GPH

Luminous Intensity Polar Plot

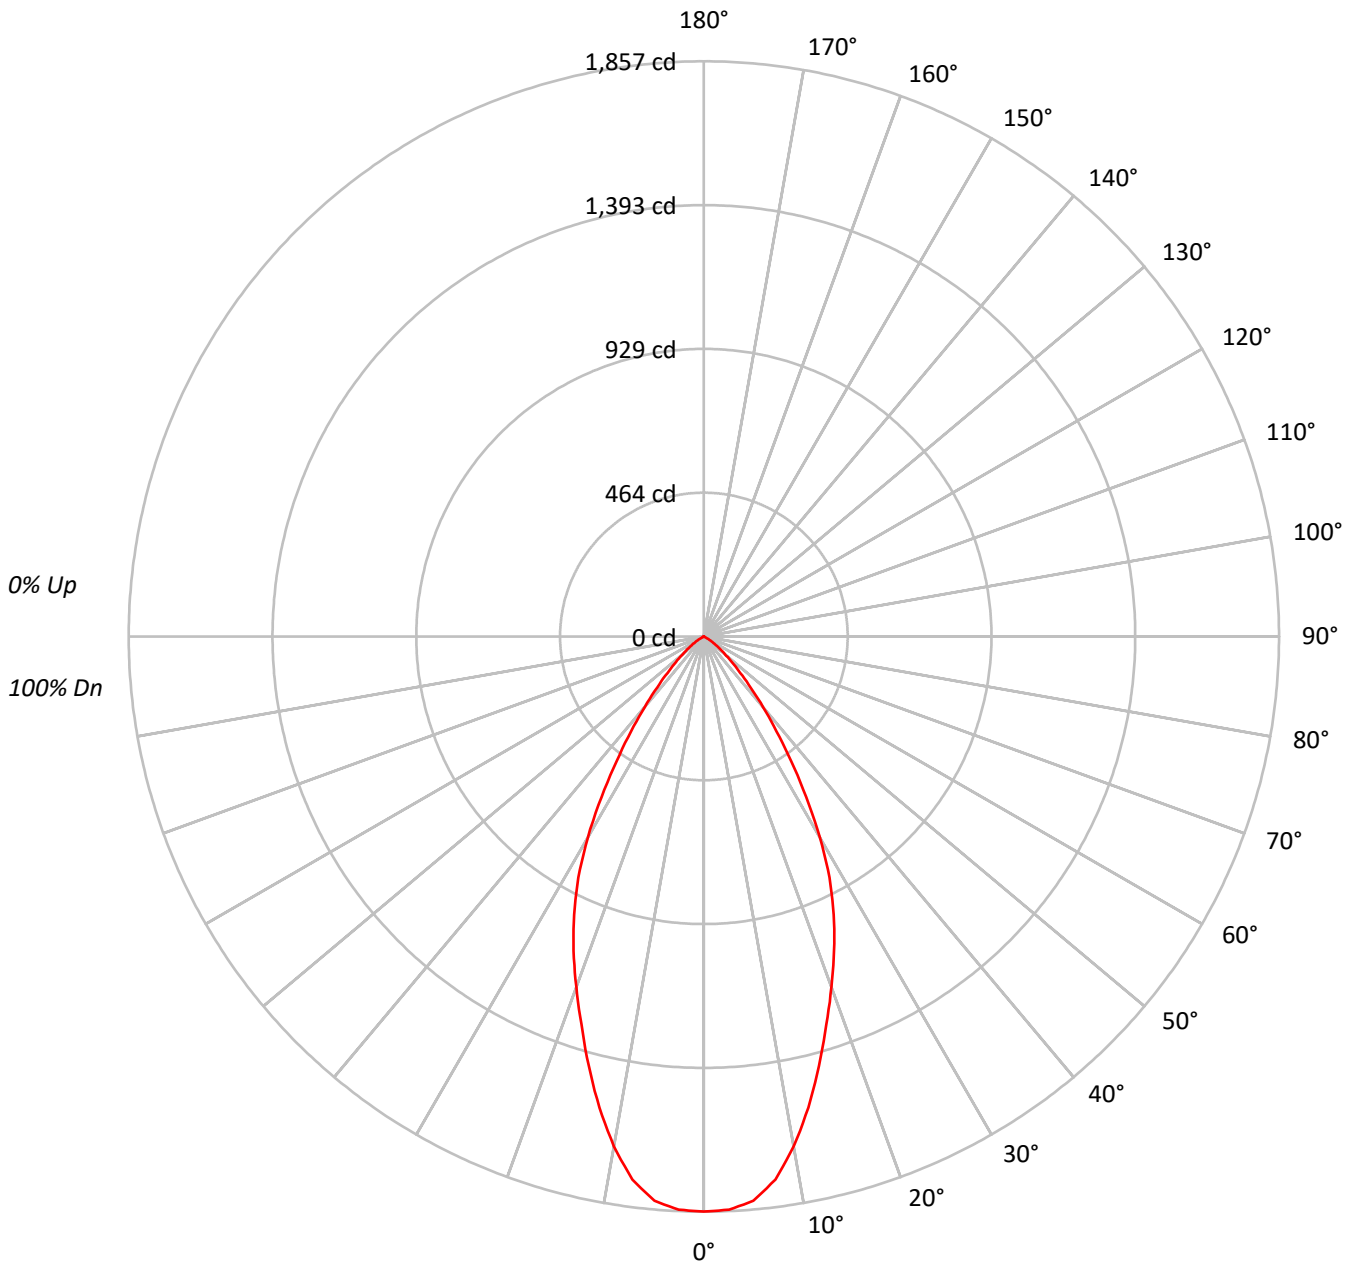



TEST NUMBER: P#

CATALOG NUMBER: LD2B20D010 EU2B20WFL559050 2LBD*GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93			
2	108	103	99	95	105	101	97	94	98	95	92	95	92	90	92	90	88	86			
3	102	95	90	86	100	94	89	86	91	88	84	89	86	83	87	84	82	80			
4	97	89	83	79	95	88	83	79	86	81	78	84	80	77	82	79	76	74			
5	92	83	77	73	90	82	77	72	80	75	72	79	74	71	77	73	70	69			
6	87	78	72	67	85	77	71	67	75	70	67	74	70	66	73	69	66	64			
7	83	73	67	63	81	72	67	62	71	66	62	70	65	62	69	65	61	60			
8	78	69	63	58	77	68	62	58	67	62	58	66	61	58	65	61	58	56			
9	75	65	59	55	74	64	59	55	63	58	54	62	58	54	62	57	54	53			
10	71	61	55	51	70	61	55	51	60	55	51	59	54	51	58	54	51	50			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	719147
5°	711240
10°	657358
15°	575690
20°	496295
25°	423713
30°	335183
35°	231939
40°	150075
45°	91097
50°	53270
55°	29849
60°	11388
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P#

CATALOG NUMBER: LD2B20D010 EU2B20WFL559050 2LBD*GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	169.5	11.2
10°-20°	400.2	26.5
20°-30°	450.4	29.8
30°-40°	310.6	20.6
40°-50°	134.1	8.9
50°-60°	41.6	2.8
60°-70°	2.8	0.2
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1020.1	67.6
0°-40°	1330.7	88.2
0°-60°	1506.5	99.8
0°-90°	1509.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1509.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1857	
5°	1829	169
15°	1436	400
25°	991	450
35°	490	311
45°	166	134
55°	44	42
65°	0	3
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P#

CATALOG NUMBER: LD2B20D010 EU2B20WFL559050 2LBD*GPH

CANDELA DISTRIBUTION (FULL):

	0°
0°	1856.6
2.5°	1852.4
5°	1829.2
7.5°	1768.2
10°	1671.3
12.5°	1557.7
15°	1435.6
17.5°	1313.5
20°	1204.0
22.5°	1098.8
25°	991.4
27.5°	877.8
30°	749.4
32.5°	614.6
35°	490.5
37.5°	385.2
40°	296.8
42.5°	223.1
45°	166.3
47.5°	122.1
50°	88.4
52.5°	63.1
55°	44.2
57.5°	29.5
60°	14.7
62.5°	4.2
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)